

FP-LM/LA

FP-LM/LA UNIVERSAL / VERTICAL CONCEALED FAN COIL UNIT

产品简介 PRODUCT INTRODUCTION

FP-LM:

- 符合QS和CE认证要求
- 同一机组满足3种安装方式-----落地式、壁挂式、天花吸顶式
- 多种控制方式选择(三速开关,温控,电脑控制板)
- 防腐金属喷涂、ABS相符合外壳
- 全新优化设计的离心风机和表冷器流路,运转噪音更低,制冷效率更高
- 易于安装与维护
- 不同功率电加热选择
- QS and CE compliance
- Three installation variants for one unit, i.e. standing, wall mounting and ceiling variants
- Various control modes, i.e. mechanical switch, thermostat and control panel
- ABS housing with anti-corrosion metallic coating
- Newly improved centrifugal fan and cooling coils featuring lower running noise and higher cooling capacity
- Easy installation and maintenance
- Optional electrical heaters




FP-LA:

- 符合QS和CE认证要求
- 造型超薄、美观大方、运转宁静,噪音低
- 隐身安装,安全可靠,经久耐用
- 直接连接,无需其它辅助设备,大大减少维护的可能。
- 多种机外余压供选择
- 不同功率电加热选择
- QS and CE compliance
- Flat, thin and attractive outlook and silent running
- Hidden installation, safety, reliability and durability
- Direct connection without need for auxiliaries, leading to less maintenance
- Different excess pressure available
- Optional electrical heaters




外形尺寸图 DIMENSIONS

FP-LM



型号	FP51	FP68	FP85	FP102	FP136	FP170	FP204
A	970	1140	1170	1340	1720	1950	2030
C	230	230	230	250	250	250	250
D	679	849	879	1050	1430	1661	1741

FP-LA

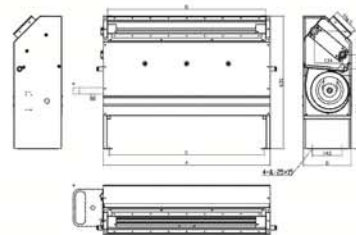

★注:外接积水盘为选配件。

型号	FP51	FP68	FP85	FP102	FP136	FP170	FP204
机型总长(A)	630	800	830	1000	1380	1610	1690
出风口长度(B)	590	760	790	960	1340	1570	1650
安装孔长度(C)	573	743	773	943	1323	1553	1633
机型厚度(D)	230	230	230	250	250	250	250

FP-LM/LA

型号 MODEL		FP-51	FP-68	FP-85	FP-102	FP-136	FP-170	FP-204	
风量 AIR FLOW	H	m ³ /h	510	680	850	1020	1360	1700	2040
	M		384	510	638	765	1020	1275	1530
	L		258	340	425	510	680	850	1020
制冷量 COOLING CAPACITY	H	W	2680	3640	4480	5350	7180	8950	10600
	M		2270	3020	3770	4530	6040	7515	8350
	L		1650	2170	2710	3250	4340	5420	6050
显冷量 SENSIBLE COOLING CAPACITY	H	W	1900	2536	3171	3803	5071	6339	6540
	M		1573	2083	2607	3125	4167	5184	5443
	L		1149	1511	1887	2263	3022	3774	4174
制热量 HEATING CAPACITY	H	W	4050	5400	6750	8100	10800	13500	16200
	M		3240	4290	5370	6430	8580	10720	13380
	L		2260	3000	3710	4450	5950	7450	9580
噪音 NOISE LEVEL (1*1m)		≤dB(A)	39	41	43	45	46	48	50
电源 POWER SUPPLY		220-240V/1P/50-60HZ							
输入功率 POWER INPUT		W	51	62	71	94	124	152	188
控制方式 CONTROL METHOD		遥控或线控器或三速开关 REMOTE CONROLLER OR WIRING CONTROLLER OR THREE-SPEED SWITCH							
水流量 WATER FLOW		kg/h	520	700	876	1050	1400	1750	1990
水阻 WATER PRESSURE DROP		kpa	5.9	11.9	19.7	31.9	37.8	24.2	29.4
排水管尺寸 COND. PIPE SIZE		mm	φ20						
重量 WEIGHT kg		LM	19	21	22	27	39	47	49
		LA	17	19	20	25	37	45	47
工作方式 WORKING PRESSURE		1.6							
连接方式 CONNECTION METHOD		外丝连接 SOCKET							
水管尺寸 WATER CONNECTION		进 IN	inch G3/4"						
		出 OUT	inch G3/4"						

1. 风量是指出口静压为0Pa时的风量。

External pressure is 0Pa.

2. 供冷工况参数: 进口空气干球温度为27℃, 湿球温度19.5℃, 进水温度7℃, 出水温度12℃。
27℃db /19.5℃wb entering air temperature, 7℃ entering water and 12℃ leaving water temperature.

3. 供热工况参数: 进口空气干球温度为21℃, 进水温度60℃, 流量同制冷工况流量。
21℃db entering air temperature, 60℃ entering water and water flow is same to cooling water flow.