
Data Book

T_wAVDF_1119_EN

W-AV DF

13-171 kW

Air conditioners for IT Cooling with DUAL FLUID system.
For chilled water feeding.



The picture of the unit is indicative and may vary depending on the model



- Perimeter installation
- Dual Fluid system with addition coil
- Variable air flow and water flow
- Air delivery from the bottom or from the top

- Plug Fans with EC electric motor
- 2-way chilled water valve
- Air suction temperature up to 45°C

INDEX

CERTIFICATIONS 4

GENERAL CHARACTERISTICS 5

PRODUCT FEATURES AND BENEFITS 5

INSTALLATION 6

MODEL IDENTIFICATION 6

WORKING LIMITS 7

TRANSPORT AND STORAGE TEMPERATURE 7

MAIN COMPONENTS 8

OPTIONAL ACCESSORIES 10

TECHNICAL DATA 12

DUAL FLUID SYSTEM 14

HYDRAULIC DIAGRAM 15

2-WAY BALL VALVE FOR CHILLED WATER FLOW CONTROL
(MAIN CIRCUIT AND DUAL FLUID CIRCUIT) 15

ACOUSTIC DATA 16

ELECTRICAL DATA 16

WATER QUALITY OF THE HYDRAULIC CIRCUITS 17

ANTIFREEZE MIXTURES 17

MICROPROCESSOR CONTROL SYSTEM 18

DEMAND LIMIT 20

ACTIVE REDUNDANCY 20

TEMPERATURE PROBE ON AIR SUCTION / DELIVERY 20

POSSIBLE AIR INTAKE FOR OVER VERSIONS 21

OPTIONAL ACCESSORIES: P121 – FRONT AIR INTAKE+BOTTOM PANEL 22

OPTIONAL ACCESSORIES: P122 - BOTTOM AIR INTAKE+BLIND PANELS 22

OPTIONAL ACCESSORIES: A548 - CONSTANT PREVALENCE 23

OPTIONAL ACCESSORIES: P091 – BACK-UP MODULE CONTROLLER 23

OPTIONAL ACCESSORIES: 383 – NUMBERED WIRINGS + UK REQUESTS 23

OPTIONAL ACCESSORIES: 4181 – SERIAL CARD MODBUS 23

OPTIONAL ACCESSORIES: 4182 – SERIAL CARD LON 23

OPTIONAL ACCESSORIES: 4184 – SERIAL CARD BACNET MS/TP RS485 24

OPTIONAL ACCESSORIES: 4185 – SERIAL CARD BACNET OVER IP 24

OPTIONAL ACCESSORIES: A491 – WATER LEACKAGE DETECTOR 24

OPTIONAL ACCESSORIES: A492 – WATER LEACKAGE DETECTOR + ADDITIONAL DETECTOR 24

OPTIONAL ACCESSORIES: A501 - CLOGGED FILTERS SENSOR 24

OPTIONAL ACCESSORIES: A511 – SMOKE DETECTOR 25

OPTIONAL ACCESSORIES: A521 – FIRE DETECTOR 25

OPTIONAL ACCESSORIES: A822 – ADAPTIVE SET-POINT 25

OPTIONAL ACCESSORIES: P141 – ANALOGUE SET-POINT COMPENSATION 26

OPTIONAL ACCESSORIES: A842 – NETWORK ANALYZER 26

OPTIONAL ACCESSORIES: A812 – FREE-COOLING DIRECT CONTROL 26

OPTIONAL ACCESSORIES: P021 – 2-WAY BALL BYPASS VALVE (MAIN CIRCUIT) 26

OPTIONAL ACCESSORIES: A431 - ELECTRIC HEATERS 27

OPTIONAL ACCESSORIES: A432 – EXTRA POWER ELECTRIC HEATERS 27

OPTIONAL ACCESSORIES: 4301 – STEAM HUMIDIFIER 3KG/H 28

OPTIONAL ACCESSORIES: 4303 – STEAM HUMIDIFIER 8KG/H 28

OPTIONAL ACCESSORIES: 4305 – STEAM HUMIDIFIER 15KG/H 28

OPTIONAL ACCESSORIES: P051 – DEHUMIDIFICATION FUNCTION 30

OPTIONAL ACCESSORIES: P161 – T/RH AIR INTAKE SENSOR 30

OPTIONAL ACCESSORIES: P071 – REMOTE T/RH PROBE 30

OPTIONAL ACCESSORIES: 4666 – EXTERNAL AIR PROBE 30

OPTIONAL ACCESSORIES: P111 – DUAL POWER SUPPLY 30



| | |
|--|----|
| OPTIONAL ACCESSORIES: P112 – DUAL POWER SUPPLY + OPTIONAL | 30 |
| OPTIONAL ACCESSORIES: P113 – DUAL POWER SUPPLY KIT | 30 |
| OPTIONAL ACCESSORIES: P114 – DUAL POWER SUPPLY KIT + OPTIONAL | 30 |
| OPTIONAL ACCESSORIES: A381 - DRAIN PUMP | 31 |
| OPTIONAL ACCESSORIES: P084 – AIR FILTER EPM ₁₀ 50% | 32 |
| OPTIONAL ACCESSORIES: A531 – ON-OFF DAMPER | 33 |
| OPTIONAL ACCESSORIES: P011 - EMPTY PLENUM | 35 |
| OPTIONAL ACCESSORIES: P012 - EMPTY PLENUM CL.A1 | 35 |
| OPTIONAL ACCESSORIES: P031 - EMPTY INTAKE PLENUM | 35 |
| OPTIONAL ACCESSORIES: P032 - EMPTY INTAKE PLENUM CL.A1 | 35 |
| OPTIONAL ACCESSORIES: P013 - PLENUM + 3 GRILLES | 35 |
| OPTIONAL ACCESSORIES: P014 - PLENUM + 3 GRILLES CL.A1 | 35 |
| OPTIONAL ACCESSORIES: P015 - SILENCED PLENUM | 35 |
| OPTIONAL ACCESSORIES: P016 - SILENCED PLENUM + 1 GRILLE | 35 |
| OPTIONAL ACCESSORIES: P017 - PLENUM + FILTER EPM2.5 50% | 35 |
| OPTIONAL ACCESSORIES: P018 - PLENUM + FILTER EPM1 50% | 35 |
| OPTIONAL ACCESSORIES: P019 - PLENUM + FILTER EPM1 85% | 35 |
| OPTIONAL ACCESSORIES: P034 – INTAKE FREE-COOLING PLENUM | 40 |
| OPTIONAL ACCESSORIES: P041 – SUPPORT FRAME H 255-350MM | 44 |
| OPTIONAL ACCESSORIES: P042 – SUPPORT FRAME H 355-450MM | 44 |
| OPTIONAL ACCESSORIES: P043 – SUPPORT FRAME H 400-510MM | 44 |
| OPTIONAL ACCESSORIES: A272 – CL.0 OR A1 (EN13501-1) INSULATION | 45 |
| OPTIONAL ACCESSORIES: P151 – LOWERED DISPLAY FOR UNDER | 45 |
| MACHINE DRAWINGS | 46 |
| HOLE IN THE RAISED FLOOR FOR DOWNFLOW VERSION | 67 |
| EXAMPLE FOR MACHINES NOISE EMISSION CALCULATION | 68 |
| VALVE PRESSURE DROP CALCULATION AS FUNCTION OF WATER FLOW RATE | 70 |
| AIR FILTERS REPLACEMENT | 71 |
| SHIPMENT: PACKING DIMENSIONS | 72 |
| SHIPMENT: SHIPPING WEIGHT | 72 |
| SHIPMENT: OPTIONALS PACKING DIMENSIONS AND SHIPPING WEIGHT | 73 |

Liability disclaimer

The present publication is drawn up by of information only and does not constitute an offer binding upon Mitsubishi Electric Hydronics & IT Cooling Systems S.p.A. Mitsubishi Electric Hydronics & IT Cooling Systems S.p.A. has compiled the content of this publication to the best of its knowledge. The data contained herein are subject to change without notice. Mitsubishi Electric Hydronics & IT Cooling Systems S.p.A. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Mitsubishi Electric Hydronics & IT Cooling Systems S.p.A.

CERTIFICATIONS



SYSTEM CERTIFICATIONS

ISO 9001 CERTIFICATION
Quality Management System

ISO 14001 CERTIFICATION
Environmental Management System

BS OHSAS 18001 CERTIFICATION
Occupational Health and Safety Management System

PRODUCT CERTIFICATIONS BY COUNTRY



CE MARKING



CCC – CQC CERTIFICATION
(People's Republic of China)



EAC CERTIFICATION
(Russian Federation, Belarus, Kazakhstan)



GENERAL CHARACTERISTICS



UNDER
Downflow air delivery



OVER
Upflow air delivery


Air conditioners for IT Cooling with Dual Fluid system

- Chilled water feeding;
- Variable air and water flow;
- Plug fans with EC electric motor.
- **Two independent cooling systems:** Double chilled water coil.

This series is offered in 11 models, available in the following versions:

- Air intake from the front through honeycomb grille and air delivery from the top of the unit (Over).
- Air intake from the top and air delivery from the bottom of the unit (Under).

Cooling capacity: 13 ÷ 171 kW

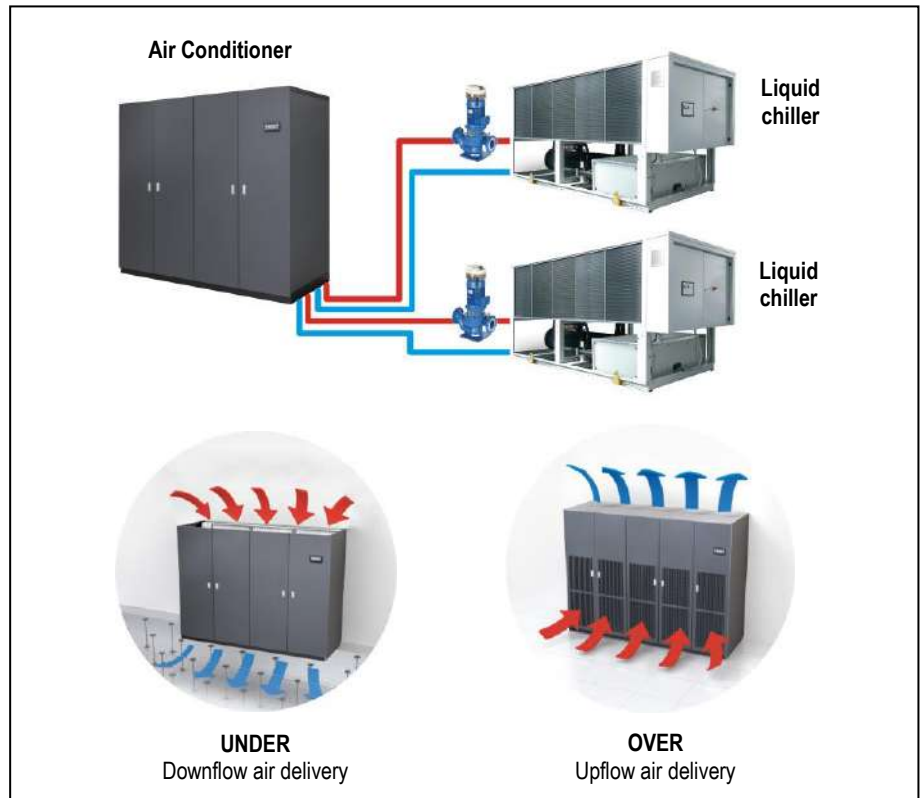

The machines are made for indoor installation.

The constructive solutions and the internal lay-out allow high application flexibility and the frontal access to the main components for the inspection and routine maintenance.


The installation requires electrical and hydraulic connections.

Final assembly on all machines before shipment including running test, reading and monitoring of operating parameters, alarms simulation and visual check.

PRODUCT FEATURES AND BENEFITS

- **Dual Fluid System:** Two independent cooling systems: Double chilled water coil;
- Wider range and performance increasing;
- SHR ratio compared to the previous series, up to 0,95;
- Optimization of the hydraulic circuit;
- New plug fans with EC electric motors with impeller in composite material, which guarantees a reduction of power consumption;
- New fans electric motor that do not require maintenance;
- Improvement of the control software with advanced control logic;
- Increased cooling density, up to 64,6 kW per m²;
- Total front access for the routine maintenance;
- Panels fully removable to facilitate the operations of extraordinary maintenance;

INSTALLATION

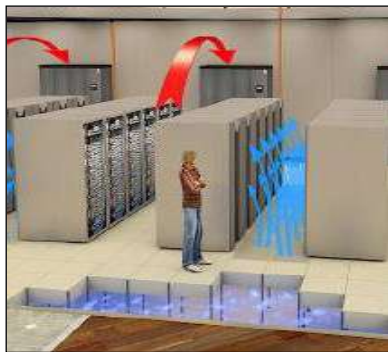

DOWNFLOW VERSION (Under)

Typical installation is on the perimeter.

The units are placed along the perimeter of the data center. Air suction from the top of the unit and air delivery in the underfloor void.

The air distribution is achieved by special tiles placed in front of the racks row, forming cold aisle for air diffusion. On the rear of the racks is expelled the hot air (hot aisle) then aspirated by the unit.

For an optimal installation is advisable to provide the cold aisle containment.



Some solutions provide a service corridor around the server rooms where to place the units. In this case it is necessary to provide the air intake plenum for each unit. With this solution all the space in the Data Center is available for the installation of racks.

UPFLOW VERSION (Over)

The type of installation is practically similar to the previous. The only difference is that for the air distribution in the Data Center is not used the raised floor but ducts in the ceiling.



OPTIONAL

An extensive list of accessories allows the unit to adapt effectively to the real needs of the system, reducing the time and cost of installation.






















MODEL IDENTIFICATION

Air conditioners for IT Cooling for chilled water feeding


model: w-AV DF O 072 E5

| | |
|-------------|--|
| w-AV | Series |
| DF | Unit type DF – with dual fluid system Two independent cooling systems: Chilled water coil, direct expansion coil, |
| O | Air delivery O = over – upflow air delivery U = under – downflow air delivery |
| 072 | Model / Cooling capacity (kW) at nominal conditions |
| E5 | Size |

THE RANGE

| | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|--|
| UNDER | E1 | E2 | E3/E3P | E4 | E5 | E6 | E7 | E8 | E9 | E10 |
|  |  |  |  |  |  |  |  |  |  |  |
| OVER | E1 | E2 | E3/E3P | E4 | E5 | E6 | E7 | E8 | E9 | |
|  |  |  |  |  |  |  |  |  |  | |

WORKING LIMITS

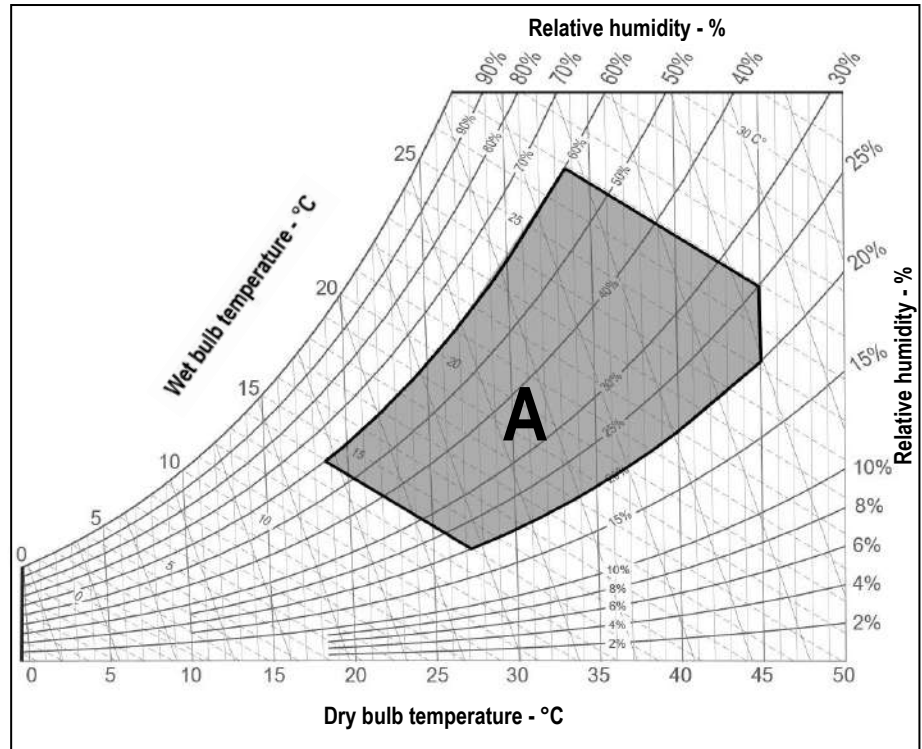

ROOM AIR CONDITIONS

Room air temperature:

- 14°C minimum temperature with wet bulb.
- 27°C maximum temperature with wet bulb.
- 18°C minimum temperature with dry bulb.
- 45°C maximum temperature with dry bulb.

AREA "A". Machine operating envelope.

Room air humidity:

- 20%RH minimum relative humidity.
- 60%RH maximum relative humidity.

CHILLED WATER TEMPERATURE

- 6°C Minimum chilled water inlet temperature
- 25°C Maximum chilled water inlet temperature
- ΔT 3°C Minimum temperature difference between chilled water inlet and outlet
- ΔT 10°C Maximum temperature difference between chilled water inlet and outlet

HYDRAULIC CIRCUIT

- ΔP 5-150kPa Pressure drop range of the hydraulic circuit.
- 10 Bar Maximum working pressure of the hydraulic circuit

POWER SUPPLY

- ± 10% Maximum tolerance of the supply voltage (V)
- ± 2% Maximum unbalancing of the phases.

TRANSPORT AND STORAGE TEMPERATURE

During transport and if the machine is not installed at the reception, do not remove the packaging and place the machine in an enclosed, dry and protected from sunlight site at temperatures ranging between -30°C and 50°C in absence of superficial condensation.

MAIN COMPONENTS



FRAMEWORK

- Base in aluminium extrusion, painted with epoxy powders. Colour RAL 9005;
- Frame in aluminium profile, painted with epoxy powders. The inner frame is provided with seals for the panels. Colour RAL 9005;
- Panels in galvanized steel sheet with protective surfaces treatment in compliance with UNI ISO 9227/ASTMB117 and ISO 7253, and painted with epoxy powders. Colour RAL 7016 hammered;
- Panels insulated with polyurethane foam and seals to ensure air tight.
- Hinged front panels with quick release removal system.
- Total front access for routine maintenance.
- Removable lateral and back side panels.
- Air flow OVER version:
 - Air intake from the front through honeycomb type grille and air delivery from the top.
- Air flow UNDER version:
 - Air intake from the top and air delivery from the bottom.
- Compartment for electrical panel on unit front for direct access to control and regulation devices;

FILTER SECTION

- Washable air filters with COARSE 60% efficiency (according to ISO EN 16890), with cells in synthetic fibre and metallic frame.
- Air filters access:
 - OVER version
 - Frontal access for all machines
 - UNDER version
 - For machines size E1 – E2 – E3 frontal access
 - For machine size E3P - E4 – E5 – E6 – E7 – E8 – E9 – E10 access from up side

COOLING SECTION

- Heat exchanger coil with internally corrugated copper tubes and high efficiency aluminium fins, specifically developed to provide high heat transfer and lower pressure drops.
- Finned pack with hydrophilic treatment that assure the condensate water drop, high thermal conductivity and does not favour the growth of micro-organisms.
- 2-way motorized valve for water flow regulation with 0÷10 VDC control actuator and emergency manual control.
- Frame in galvanized steel.
- Condensate tray in peraluman with PVC flexible discharge pipe.
- Temperature sensor on air intake with function of temperature display.
- Temperature sensor on air delivery with function of control and regulation.
- Temperature probe on chilled water inlet.

COOLING SECTION – DUAL FLUID

- Chilled water 4 rows cooling coil with copper tubes, aluminium fins and galvanized steel frame.
- 2-way motorized valve with 0÷10 VDC control actuator and emergency manual control.
- Temperature probe on water inlet.
- Hydraulic pipes in copper with anticondensate insulation.



FANS SECTION

The fan section is contained within the machine and includes:

- Centrifugal fans with backward curved blades with wing profile, single suction and without scroll housings (Plug-fans), directly coupled to external rotor electric motor.
 - Impeller in composite material exempt from rust formation.
 - Brushless type synchronous EC motor with integrated electronic commutated system and continuous variation of the rotation speed. The motor rotation control is obtained with the EC system (Electronic Commutation) that manage the motor according to the signal coming from the microprocessor control.
- Fans control through ModBus. In case of failure, the control stops the interested fan indicating the type of fault. The machine with more than one fan is not stopped.
- Adjustable External Static Pressure (ESP).
- Fan guard with rubber support (UNDER version)



ELECTRICAL PANEL

In accordance with EN60204-1 norms, suitable for indoor installation, complete with:

- Main switch with door lock safety on frontal panel;
- Magnetothermic switches for supply fans.
The supply fans equipped with EC electric motor and don't require contactors.
- Transformer for auxiliary circuit and microprocessor supply.
- Numbered wirings.
- Terminals:
OUTLETS
 - Voltage free deviating contact for General Alarm 1-2.
 - Voltage free contact for supply fans status.
 - Voltage free contact for smoke / fire sensor (the sensors are accessory)INLETS
 - External enabling.
- Power supply 400/3+N/50.



CONTROL SYSTEM

Microprocessor control system with graphic display for control and monitor of operating and alarms status.

The system includes:

- Built-in clock for alarms date and time displaying and storing;
- Built-in memory for the storing of the intervened events (up to 200 events recorded);
- Predisposition for additional connectivity board housing (MODBUS, LON, BACNET MS/TP RS485, BACNET OVER IP). The electronic cards are optional accessories.
- Main components hour-meter;
- Non-volatile "Flash" memory for data storage in case of power supply faulty;
- Menu with protection password;
- LAN connection (max 10 units).

OPTIONAL ACCESSORIES

The descriptions of these additional components can be found in Chapter OPTIONAL ACCESSORIES.

| | |
|--------------------------------|--|
| P121..... | Front air intake + bottom panel. Unit base noise insulation with special bottom panel for OVER version. Restriction: Non-compatible with "P122 Bottom air intake + blind panels" for OVER version. |
| P122..... | Bottom air intake + blind panels. Blind frontal panel for OVER version. The accessory allows the intake air from the bottom of the machine. Restriction: Not compatible with "P121 Front air intake + bottom panel" for OVER version |
| A548..... | Constant prevalence. Automatic system for the air pressure control in the underfloor (Under version) or in the duct (Over version). The system controls the supply fans rotation speed in order to keep constant the air pressure in the underfloor/duct via a differential pressure transmitter connected to the microprocessor control. |
| P091..... | Back-up module controller. The system guarantees the microprocessor power supply for a few minutes, in case of supply voltage failure. |
| 383..... | Numbered wirings + UK requests; |
| 4181 / 4182 / 4184 / 4185... | Serial cards: 4181 – Serial card MODBUS; 4182 – Serial card LON; 4184 – Serial card BACNET MS/TP RS485; 4185 – Serial card BACNET OVER IP. |
| A491..... | Water leakage detector. Supplied in mounting kit. |
| A492..... | Water leakage detector + additional sensor. Supplied in mounting kit. |
| A501..... | Clogged filter sensor. Differential pressure switch on the air side for clogged filters alarm signal. |
| A511..... | Smoke detector. Supplied in mounting kit. |
| A521..... | Fire detector. Supplied in mounting kit. |
| A822..... | ADAPTIVE SET POINT: function that optimizes the operation of liquid chillers connected to the indoor air conditioners by control of the effective room thermal load. |
| P141..... | Analogue set-point compensation. Analogue set point compensation according to an external analogue signal at Customer care. |
| A842..... | Network analyser. Multifunction utility for calculating and displaying the machine electrical measurements. |
| A812 (1)..... | Free-cooling direct control. |
| P021..... | 2-way ball by-pass valve. 2-way modulating motorized valve with 0÷10 VDC control actuator and emergency manual control for the third way (by-pass) of the chilled water hydraulic circuit. The valve is in combination with the main water flow control valve. |
| A431..... | Electric heater. Heating with electric heaters. |
| A432..... | Extra power electric heater. Size E1, E2 excluded. |
| 4301 / 4303 / 4305 (2)..... | Humidification: Modulating steam humidifier with immersed electrodes with electronic control. 4301 - Steam humidifier 3kg/h 4303 - Steam humidifier 8kg/h 4305 - Steam humidifier 15kg/h |
| P051 (3)..... | Dehumidification function. |
| A791..... | Air temperature control on suction air. |
| P161..... | T/rH air intake sensor. Combined Temperature / Humidity sensor on air intake. The optional replace the standard temperature sensor on machine air intake. |
| 4666..... | External air probe. External air temperature probe. |
| P071..... | Remote T/rH probe. Combined Temperature / Humidity sensor for remote installation. The optional is added to the standard temperature sensor on machine air intake. |
| P111 / P112 / P113 / P114..... | Dual power supply. Dual power supply with automatic change-over. P111 - Dual power supply. P112 - Dual power supply + optional. P113 - Dual power supply kit. P114 - Dual power supply kit + optional. |
| A381..... | Drain pump. Supplied in mounting kit. The system includes pump with activation float and 10 linear meters long discharge pipe. |
| P084..... | Air filter ePM₁₀ 50%. Washable high efficiency air filter (according to ISO EN 16890). Not compatible with "P017 / P018 / P019 Plenum + filter ePM _{2.5} 50%, ePM ₁ 50%, ePM ₁ 85% (according to ISO EN 16890)". |

| | |
|---------------------------------|--|
| A531 (4) | On-off damper. Non-return air damper with frame driven by electric servomotor installed on the machine air delivery. |
| P011 | Empty plenum. |
| P012 | Empty plenum CL.A1. Plenum with fire reaction in class "0" or "A1". |
| P013 | Plenum + 3 grilles on three sides with double adjustable row. |
| P014 | Plenum + 3 grilles CL.A1. Plenum with grilles on three sides with double adjustable row, with fire reaction in class "0" or "A1". |
| P015 | Silenced plenum. Not compatible with "P084 Air filter ePM ₁₀ 50%". |
| P016 | Silenced plenum + 1 grille. Grille with double adjustable row on front side and sound absorbers. |
| P017 | Plenum + filter ePM_{2,5} 50%. Plenum with high efficiency air filter (according to ISO EN 16890). Not compatible with "P084 Air filter ePM ₁₀ 50%". |
| P018 | Plenum + filter ePM₁ 50%. Plenum with high efficiency air filter (according to ISO EN 16890). Not compatible with "P084 Air filter ePM ₁₀ 50%". |
| P019 | Plenum + filter ePM₁ 85%. Plenum with high efficiency air filter (according to ISO EN 16890). Not compatible with "P084 Air filter ePM ₁₀ 50%". |
| P031 (5) | Empty intake plenum. |
| P032 (5) | Empty intake plenum CL.A1. Plenum with fire reaction in class "0" or "A1". |
| P034 (6) | Intake free-cooling plenum. |
| P041 / P042 / P043 | Support frame with height adjusting rubber holders. Supplied in mounting kit. It is not possible to match the support frame with plenum installed under the machine. P041 – Support frame h 255-350mm P042 – Support frame h 355-450mm P043 – Support frame h 400-510mm |
| A272 | CL. 0 or A1 (EN 13501-1) insulation: Panelling with fire reaction in class "0" or "A1"; |
| P151 | Lowered display for Under – for UNDER units equipped with plenum under the unit; |
| 9973 | Wooden cage packing. The machines are delivered on wooden pallet, covered with shrink wrap and packaged in wooden cage. |
| BQ39900001 | Remote terminal. Graphic display for remote installation, the optional is added to the standard graphic display placed on machine frontal panel. |

WARNING

The Manufacturers reserves the right to accept the matching of the optional installed on the machine.

MANDATORY COMBINATIONS OF ACCESSORIES

1. When optional accessory "A812 Free cooling direct control" is present, it requires mandatory accessories "P161 T/rH air intake sensor" and "4666 External air probe".
2. When optional accessories "4301 / 4303 / 4305 Steam humidifier" are present, they require mandatory accessory "P161 T/rH air intake sensor".
3. When optional accessory "P051 Dehumidification function" is present, it requires mandatory accessory "P161 T/rH air intake sensor".
4. When optional accessory "A531 On-off damper" is present, it requires mandatory accessory "9973 Wooden cage packing".
5. When optional accessories "P031 Empty intake plenum, for OVER version" and "P032 Empty intake plenum CL.A1, for OVER version" are present, they require mandatory accessory "P122 Bottom air intake+blind panels, for OVER version only"
6. When optional accessory "P034 Intake free-cooling plenum" is present, it requires mandatory accessories "P161 T/rH air intake sensor", "4666 External air probe", "A812 Free-cooling direct control" and "P122 Bottom air intake+blind panels, for OVER version only"

TECHNICAL DATA

| VERSION (1) | | U / O | U / O | U / O | U / O | U / O |
|------------------------------------|---------|------------|------------|------------|------------|------------|
| MODEL | | 013 | 021 | 032 | 045 | 053 |
| SIZE | | E1 | E2 | E3 | E3P | E4 |
| COOLING CAPACITY (2) | | | | | | |
| Total | kW | 13,6 | 21,4 | 32,1 | 45,5 | 53,5 |
| Sensible | kW | 11,9 | 19,4 | 29,9 | 42,1 | 49,8 |
| SHR (3) | | 0,88 | 0,91 | 0,93 | 0,93 | 0,93 |
| "EC" SUPPLY FANS | n. | 1 | 1 | 1 | 1 | 1 |
| Air flow | m³/h | 2900 | 4920 | 7800 | 10800 | 13100 |
| Nominal external static pressure | Pa | 20 | 20 | 20 | 20 | 20 |
| Maximum external static pressure | Pa | 50 | 53 | 416 | 315 | 97 |
| Fans power input (4) | kW | 0,32 | 0,99 | 1,81 | 2,14 | 2,56 |
| COOLING COIL | | | | | | |
| Water flow rate (2) | m³/h | 2,34 | 3,67 | 5,54 | 7,84 | 9,21 |
| dP coil + valve (2) | kPa | 23,3 | 57,3 | 49,3 | 41,5 | 45,6 |
| Water volume | l | 4,2 | 5,3 | 7,8 | 11,4 | 13,8 |
| AIR FILTERS | n. | 1 | 1 | 2 | 2 | 3 |
| Filter area | m² | 0,61 | 0,78 | 1,24 | 1,71 | 2,07 |
| Efficiency (ISO EN 16890) | COARSE | 60% | 60% | 60% | 60% | 60% |
| POWER SUPPLY | V/Ph/Hz | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 |
| ENERGY EFFICIENCY INDEX (2) | | | | | | |
| EER Energy Efficiency Ratio | kW/kW | 42,5 | 21,6 | 17,7 | 21,3 | 20,9 |
| DIMENSIONS | | | | | | |
| Length | mm | 650 | 785 | 1085 | 1085 | 1305 |
| Width | mm | 675 | 675 | 775 | 930 | 930 |
| Height | mm | 1925 | 1925 | 1925 | 1925 | 1980 |
| NET WEIGHT OVER | kg | 223 | 262 | 335 | 364 | 397 |
| NET WEIGHT UNDER | kg | 236 | 280 | 358 | 372 | 431 |
| HYDRAULIC CONNECTIONS | | | | | | |
| WATER INLET / OUTLET ISO 7/1 - R | Ø | 1" | 1" | 1+1/4" | 1+1/4" | 1+1/2" |
| CONDENSATE DISCHARGE | | | | | | |
| Rubber pipe – internal diameter | Ø mm | 19 | 19 | 19 | 19 | 19 |

THE COOLING CAPACITY DOES NOT CONSIDER THE SUPPLY FAN MOTOR THERMAL LOAD

1. U = Under, downflow / O = Over, upflow
2. Gross value. Characteristics referred to entering air at 24°C-50%RH with chilled water temperature 7-12°C - 0% glycol. ESP=20Pa.
3. SHR = Sensible cooling capacity / Total cooling capacity.
4. Corresponding to the nominal external static pressure.

TECHNICAL DATA


| VERSION (1) | | U / O | U / O | U / O | U / O | U / O | U |
|------------------------------------|-------------------|------------|------------|------------|------------|------------|------------|
| MODEL | | 072 | 081 | 100 | 120 | 138 | 160 |
| SIZE | | E5 | E6 | E7 | E8 | E9 | E10 |
| COOLING CAPACITY (2) | | | | | | | |
| Total | kW | 78,8 | 81,7 | 101 | 128 | 140 | 171 |
| Sensible | kW | 67,7 | 76,1 | 94 | 114 | 130 | 151 |
| SHR (3) | | 0,86 | 0,93 | 0,93 | 0,89 | 0,93 | 0,88 |
| "EC" SUPPLY FANS | n. | 2 | 2 | 2 | 3 | 3 | 3 |
| Air flow | m ³ /h | 16350 | 20000 | 24200 | 28300 | 33100 | 37150 |
| Nominal external static pressure | Pa | 20 | 20 | 20 | 20 | 20 | 20 |
| Maximum external static pressure | Pa | 500 | 418 | 144 | 188 | 237 | 110 |
| Fans power input (4) | kW | 3,10 | 3,74 | 4,82 | 6,72 | 7,14 | 7,66 |
| COOLING COIL | | | | | | | |
| Water flow rate (2) | m ³ /h | 13,57 | 14,07 | 17,42 | 21,96 | 24,04 | 29,48 |
| dP coil + valve (2) | kPa | 59,6 | 43,4 | 38,1 | 62,6 | 56,9 | 89,1 |
| Water volume | l | 18,1 | 21,2 | 24,6 | 28,5 | 33,8 | 44 |
| AIR FILTERS | | | | | | | |
| Filter area | m ² | 2,59 | 3,16 | 3,83 | 4,47 | 5,24 | 6,54 |
| Efficiency (ISO EN 16890) | COARSE | 60% | 60% | 60% | 60% | 60% | 60% |
| POWER SUPPLY | V/Ph/Hz | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 |
| ENERGY EFFICIENCY INDEX (2) | | | | | | | |
| EER Energy Efficiency Ratio | kW/kW | 25,4 | 21,8 | 21,0 | 19,0 | 19,6 | 22,3 |
| DIMENSIONS | | | | | | | |
| Length | mm | 1630 | 1875 | 2175 | 2499 | 2899 | 3510 |
| Width | mm | 930 | 930 | 930 | 930 | 930 | 930 |
| Height | mm | 1980 | 1980 | 1980 | 1980 | 1980 | 1980 |
| NET WEIGHT OVER | kg | 492 | 557 | 624 | 699 | 805 | -- |
| NET WEIGHT UNDER | kg | 534 | 605 | 678 | 761 | 879 | 1052 |
| HYDRAULIC CONNECTIONS | | | | | | | |
| WATER INLET / OUTLET ISO 7/1 - R | Ø | 2" | 2" | 2+1/2" | 2+1/2" | 3" | 3" |
| CONDENSATE DISCHARGE | | | | | | | |
| Rubber pipe – internal diameter | Ø mm | 19 | 19 | 19 | 19 | 19 | 19 |

THE COOLING CAPACITY DOES NOT CONSIDER THE SUPPLY FAN MOTOR THERMAL LOAD

1. U = Under, downflow / O = Over, upflow
2. Gross value. Characteristics referred to entering air at 24°C-50%RH with chilled water temperature 7-12°C - 0% glycol. ESP=20Pa.
3. SHR = Sensible cooling capacity / Total cooling capacity.
4. Corresponding to the nominal external static pressure.

DUAL FLUID SYSTEM

DUAL FLUID system on the machine allows to obtain two independent cooling systems:

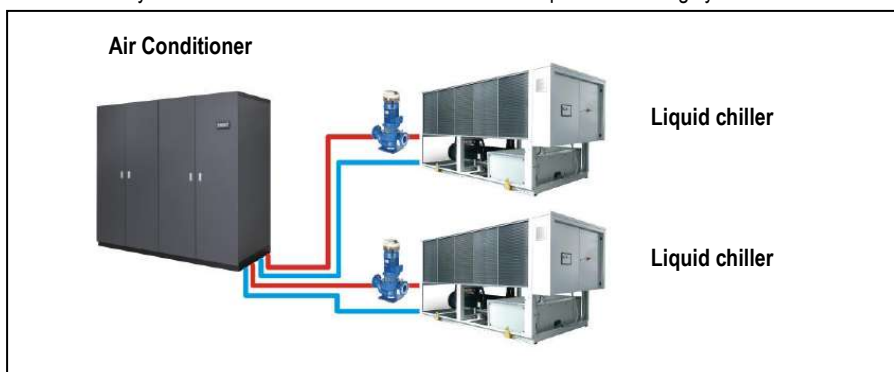

The microprocessor control system automatically manages the system, by activating the cooling circuit more convenient according to the parameters set.

With this system it is possible, with a limited use of space, to solve several plant problems such as:

- Chilled water coil fed with chilled water or mains water as a stand-by of the main cooling circuit.
- Double chilled water feeding with two independent circuit. This solution is used when you need to ensure redundancy of the cooling system.

The temperature control is performed with the same logic of the main coil.

TECHNICAL DATA

| VERSION (1) | | U / O | U / O | U / O | U / O | U / O |
|----------------------------------|-------------------|-------|-------|--------|--------|--------|
| MODEL | | 013 | 021 | 032 | 045 | 053 |
| SIZE | | E1 | E2 | E3 | E3P | E4 |
| COOLING CAPACITY (2) | | | | | | |
| Total | kW | 13,6 | 21,4 | 32,1 | 45,5 | 53,5 |
| Sensible | kW | 11,9 | 19,4 | 29,9 | 42,1 | 49,8 |
| SHR (3) | | 0,88 | 0,91 | 0,93 | 0,93 | 0,93 |
| COOLING COIL | | | | | | |
| Water flow rate (2) | m ³ /h | 2,34 | 3,67 | 5,54 | 7,84 | 9,21 |
| dP coil + valve (2) | kPa | 23,3 | 57,3 | 49,3 | 41,5 | 45,6 |
| Water volume | l | 4,2 | 5,3 | 7,8 | 11,4 | 13,8 |
| HYDRAULIC CONNECTIONS | | | | | | |
| WATER INLET / OUTLET ISO 7/1 - R | Ø | 1" | 1" | 1+1/4" | 1+1/4" | 1+1/2" |


| VERSION (1) | | U / O | U / O | U / O | U / O | U / O | U |
|----------------------------------|-------------------|-------|-------|--------|--------|-------|-------|
| MODEL | | 072 | 081 | 100 | 120 | 138 | 160 |
| SIZE | | E5 | E6 | E7 | E8 | E9 | E10 |
| COOLING CAPACITY (2) | | | | | | | |
| Total | kW | 78,8 | 81,7 | 101 | 128 | 140 | 171 |
| Sensible | kW | 67,7 | 76,1 | 94 | 114 | 130 | 151 |
| SHR (3) | | 0,86 | 0,93 | 0,93 | 0,89 | 0,93 | 0,88 |
| COOLING COIL | | | | | | | |
| Water flow rate (2) | m ³ /h | 13,57 | 14,07 | 17,42 | 21,96 | 24,04 | 29,48 |
| dP coil + valve (2) | kPa | 59,6 | 43,4 | 38,1 | 62,6 | 56,9 | 89,1 |
| Water volume | l | 18,1 | 21,2 | 24,6 | 28,5 | 33,8 | 44 |
| HYDRAULIC CONNECTIONS | | | | | | | |
| WATER INLET / OUTLET ISO 7/1 - R | Ø | 2" | 2" | 2+1/2" | 2+1/2" | 3" | 3" |

THE COOLING CAPACITY DOES NOT CONSIDER THE SUPPLY FAN MOTOR THERMAL LOAD

1. U = Under, downflow / O = Over, upflow
2. Characteristics referred to entering air at 24°C-50%RH with chilled water temperature 7-12°C - 0% glycol. ESP=20Pa.
3. SHR = Sensible cooling capacity / Total cooling capacity.

HYDRAULIC DIAGRAM

Below hydraulic diagram referred to the standard configuration without optional.

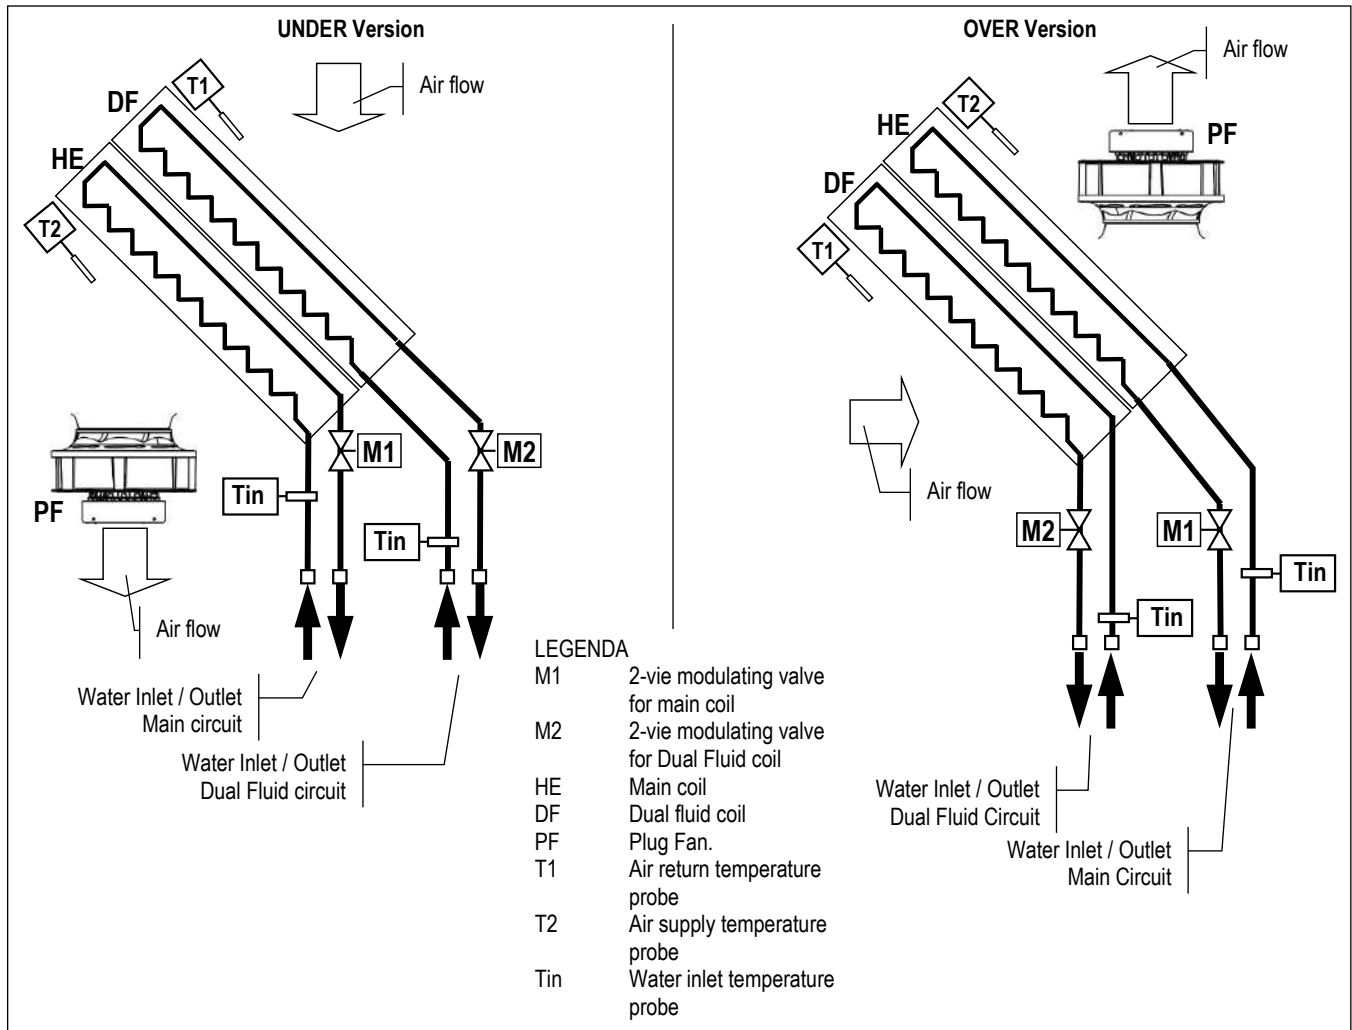

2-WAY BALL VALVE FOR CHILLED WATER FLOW CONTROL (Main circuit and Dual Fluid circuit)



The water flow control in the finned coil is achieved through a **2-way modulating ball valve with equal percentage flow control** ensured by the integrated characterizing disc.

This type of valve offers the following series of benefits:

- Equal percentage flow control.
- No peaks initial flow.
- Excellent stability control thanks to the integrated characterizing disc.
- Excellent characteristic in partialisation.
- Stability in control.
- Maintenance free.
- Self-cleaning.

CHARACTERISTICS OF THE 2-WAY BALL VALVE

- Closing seal with leakage rate in Class A (EN 12266-1)
- Maximum fluid pressure $P_s=1600\text{kPa}$
- Maximum closing pressure (Close-off) $\Delta P_s=1400\text{kPa}$

The rotative actuator is controlled by a signal 0 ... 10VDC from the microprocessor controller. The actuator is equipped with an emergency button for manual operation and is maintenance-free.

ACOUSTIC DATA

Acoustic data of the standard machine at full load working conditions.

WARNING:

In a closed room the noise produced by a sound source reaches the listener in two different ways:

- Directly
- Reflected from the surrounding walls, floor, ceiling, from furniture.

With the same sound source, the noise produced in a closed room is greater than that produced outdoors. In fact, the sound pressure level generated by the source, must be added to the one reflected from the room. Also, the shape of the room affects the sound.

| VERSION (1) | | U / O | U / O | U / O | U / O | U / O | U / O | U / O | U / O | U / O | U | |
|------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|------|
| MODEL | | 013 | 021 | 032 | 045 | 053 | 072 | 081 | 100 | 120 | 138 | 160 |
| SIZE | | E1 | E2 | E3 | E3P | E4 | E5 | E6 | E7 | E8 | E9 | E10 |
| SOUND LEVEL (2) | | | | | | | | | | | | |
| On air delivery Under | dB(A) | 65,5 | 75,2 | 76,0 | 78,8 | 79,1 | 79,7 | 80,2 | 80,7 | 84,5 | 84,1 | 83,0 |
| On air intake Under | dB(A) | 56,0 | 60,9 | 61,9 | 66,2 | 66,5 | 65,5 | 67,5 | 68,0 | 70,4 | 71,5 | 70,3 |
| On front side Under | dB(A) | 47 | 51 | 52 | 57 | 57 | 56 | 58 | 59 | 61 | 62 | 61 |
| On air delivery Over | dB(A) | 65,5 | 75,2 | 76,0 | 78,8 | 79,1 | 79,7 | 80,2 | 80,7 | 84,5 | 80,7 | -- |
| On air intake Over (3) | dB(A) | 51 | 55 | 56 | 61 | 61 | 60 | 62 | 63 | 65 | 63 | -- |
| On front side Over (4) | dB(A) | 46,8 | 51,4 | 52,3 | 56,7 | 57,1 | 55,9 | 58,1 | 58,6 | 60,8 | 58,6 | -- |

1. U = Under, downflow / O = Over, upflow
2. Noise pressure level at 1 meter in free field – ISO 3744
3. Air intake from the front
4. Air intake from the bottom

ELECTRICAL DATA

| VERSION (1) | | U / O | U / O | U / O | U / O | U / O | U / O |
|-----------------------------|---------|------------|------------|------------|------------|------------|------------|
| MODEL | | 013 | 021 | 032 | 045 | 053 | 072 |
| SIZE | | E1 | E2 | E3 | E3P | E4 | E5 |
| Power supply | V/Ph/Hz | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 |
| Maximum current input (FLA) | A | 0,33 | 1,7 | 4,2 | 4,43 | 4,15 | 8,4 |

| VERSION (1) | | U / O | U / O | U / O | U / O | U |
|-----------------------------|---------|------------|------------|------------|------------|------------|
| MODEL | | 081 | 100 | 120 | 138 | 160 |
| SIZE | | E6 | E7 | E8 | E9 | E10 |
| Power supply | V/Ph/Hz | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 |
| Maximum current input (FLA) | A | 8,86 | 8,3 | 12,6 | 13,3 | 12,5 |

1. U = Under, downflow / O = Over, upflow

WARNING:

The electric data indicated refer only to the indoor unit.

Optional accessory electric data are included within the dedicated chapters and must be added.

Please refer to ELCA WORLD selection program to calculate the electrical data of the air conditioner according to the requested optional accessories.

WATER QUALITY OF THE HYDRAULIC CIRCUITS

The values shown in the table must be guaranteed during the entire life cycle of the machine.

| | Description | Symbol | Range |
|----|---|--|------------|
| 1 | Hydrogen Ions | pH | 7.5 ÷ 9 |
| 2 | Presence of calcium (Ca) and magnesium (Mg) | Hardness | 4 ÷ 8.5 °D |
| 3 | Chlorine ions | Cl ⁻ | < 150 ppm |
| 4 | Iron Ions | Fe ³⁺ | < 0.5 ppm |
| 5 | Manganese Ions | Mn ²⁺ | < 0.05 ppm |
| 6 | Carbon dioxide | CO ₂ | < 10 ppm |
| 7 | Hydrogen sulphide | H ₂ S | < 50 ppb |
| 8 | Oxygen | O ₂ | < 0.1 ppm |
| 9 | Chlorine | Cl ₂ | < 0.5 ppm |
| 10 | Ammonia | NH ₃ | < 0.5 ppm |
| 11 | Ratio between carbonates and sulphates | HCO ₃ ⁻ /SO ₄ ²⁻ | > 1 |
| 12 | Sulphate ions | SO ₄ ⁻ | < 100 ppm |
| 13 | Phosphate ions | PO ₄ ³⁻ | < 2.0 ppm |

where: $1/1.78^{\circ}D = 1^{\circ}Fr$ with $1^{\circ}Fr = 10 \text{ gr CaCO}_3 / \text{m}^3$

ppm = parts for millions

ppb = part for billion

Explanatory notes:

- ref.1: A greater concentration of hydrogen ions (pH) than 9 implies a high risk of deposits, whereas a lower pH than 7 implies a high risk of corrosion.
- ref.2: The hardness measures the amount of Ca and Mg carbonate dissolved in the water with a temperature lower than 100°C (temporary hardness). A high hardness implies a high risk of deposits.
- ref.3: The concentration of chloride ions with higher values than those indicated causes corrosion.
- ref. 4 - 5 - 8: The presence of iron and manganese ions and oxygen leads to corrosion.
- ref.6 - 7: Carbon dioxide and hydrogen sulphide are impurities that promote corrosion.
- ref.9: Usually in water from the waterworks it is a value of between 0.2 and 0.3 ppm. High values cause corrosion.
- ref.10: The presence of ammonia reinforces the oxidising power of oxygen
- ref.11: Below the value shown in the table, there is a risk of corrosion due to the trigger of galvanic currents between copper and other less noble metals.
- ref.12: The presence of sulphates ions triggers corrosion phenomenon.
- ref.13: The presence of phosphates ions triggers corrosion phenomenon.

It is necessary to carry out periodic checks, with withdrawals at different points of the hydraulic system. During the first year of operation, checks are recommended every 4 months which can be reduced every 6 months starting from the second year of operation.

WARNING:

Values of the parameters outside the indicated ranges can lead to the formation of deposits and limescale and/or favour corrosive phenomena within the plant. For operating fluids other than water (mixtures of ethylene and propylene glycol) it is recommended to use specific inhibitors, designed to offer thermal stability within the operating temperature range and protection against corrosion. It is necessary that, in the presence of dirty and / or aggressive waters, an intermediate heat exchanger is installed upstream of the heat exchangers.

ANTIFREEZE MIXTURES

In plants that are not adequately protected by heating cables, protect the hydraulic circuit with an anti-freeze mixture when the ambient air temperature can drop below 5°C.

| | | | | | | | | | |
|---|----|---|----|----|-----|-----|-----|-----|-----|
| Minimum ambient air temperature | °C | 5 | 0 | -5 | -10 | -15 | -20 | -25 | -30 |
| ETHYLENE GLYCOL (suggested % in weight) | % | 0 | 12 | 20 | 30 | 35 | 40 | 45 | 50 |

| | | | | | | | | | |
|--|----|---|----|----|----|-----|-----|-----|-----|
| Minimum ambient air temperature | °C | 5 | 2 | -3 | -9 | -13 | -17 | -23 | -29 |
| PROPYLENE GLYCOL (suggested % in weight) | % | 0 | 10 | 20 | 30 | 35 | 40 | 45 | 50 |

The values are indicative and may significantly vary depending on the glycol manufacturer. Refer to your glycol supplier for detail. The values consider a precautionary difference of 5°C between the minimum ambient air temperature and the freezing temperature of the mixture.

In the hydraulic circuit do not send fluids other than water or mixtures with ethylene / propylene glycol.

If other products are provided, in addition to mixtures of water and ethylene or propylene glycol, contact the Manufacturer to check the compatibility with the machine components.

MICROPROCESSOR CONTROL SYSTEM



Controller




Keyboard and Display

The unit is equipped with the controller connected to a 6 keys keyboard with graphic display on which all information in English language or easily identifiable symbols are displayed. The controller disposes of a “flash” memory that preserves the information even in absence of power supply. Part of memory is dedicated to the registration of intervened events - up to 200 events.

DISPLAY – KEYBOARD FUNCTIONS

| | | |
|--|------------|--|
| | ALARM | Alarm presence with red light. Push for alarm description. In case of more alarms scroll by UP / DOWN. |
| | PRG | Menu list, scrolled by UP/DOWN: Unit; Set-point; In/Out; Clock; History; User; Service; Factory. ENTER to execute. |
| | ESC | Home. Used to come back to the previous menu level or to the main screen. |
| | UP DOWN | Changes pages and values of sets. By pressing in HOME mask, the synoptic of the main controls is displayed. |
| | ENTER | Moving the cursor on adjustable Program(s) fields to confirm the changes. Press ENTER to get out the fields. |

DISPLAY - MAIN MASK

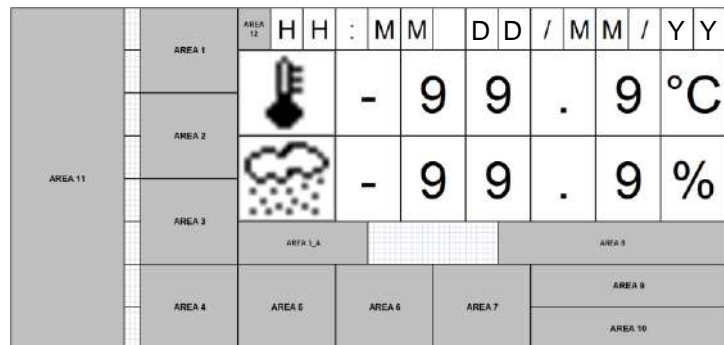

The main mask shows time, date, room temperature and humidity values (if the relative probe is present) and areas for displaying operating and alarm status with dedicated icons:

- Area 1: Status of the unit: on / off
- Area 2: Status detail
- Area 3: Type of event (only in case of an event)
- Area 3_A: Code and type of event
- Area 4: Active cooling devices
- Area 5: Active free-cooling devices
- Area 6: Active humidity devices
- Area 7: Active heating devices
- Area 8: on / off parameters
- Area 9: BMS address
- Area 10: LAN address
- Area 11: Schematic representation of units
- Area 12: Active function presence icon


CONNECTIVITY

Through the optional serial port, the microprocessor control enables communication with the modern buildings BMS systems with the following protocols: MODBUS; LON; BACNET MS/TP RS485; BACNET OVER IP.

PASSWORD

- Level 1: On request of the End User. Allowing to reach USER menu
- Level 2: Asks to Service: Allowing to reach SERVICE menu
- Level 3: Asks to Service: Allowing to reach FACTORY menu
- No passwords request to enter: UNIT, SETPOINT, IN/OUT, CLOCK, HISTORY menu



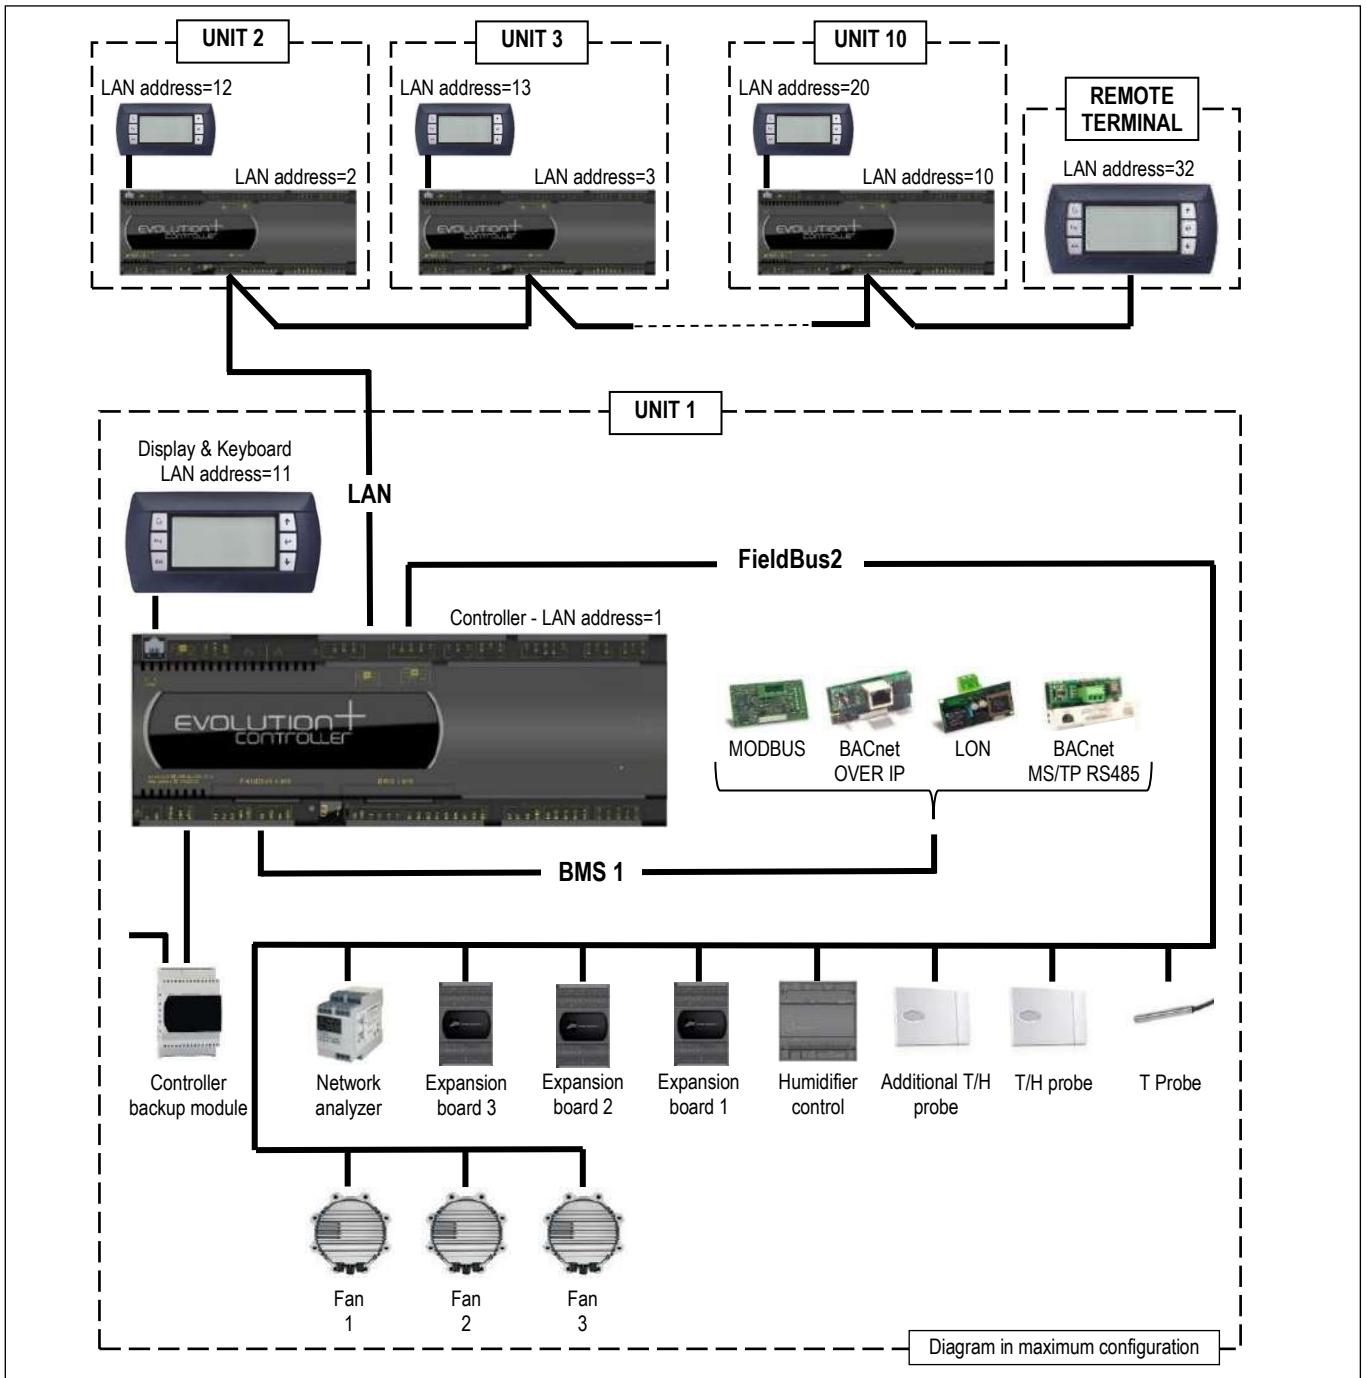

LAN NETWORK

The LAN is part of the control software and it is possible to connect up to 10 units. This type of connection allows to control the units in coherent way, moreover the units can be controlled and managed from a shared remote terminal.

LAN ADDRESS LIST

| Unit # | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | Remote Terminal |
|----------------------|----|----|----|----|----|----|----|----|----|----|-----------------|
| Mother board address | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | -- |
| Terminal address | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 32 |

The unit connection to the local network (LAN) allows to perform the following functions:

- Balancing the operating hours among the different units by rotating the reserve units (Stand-by)
- Turning on the reserve units in case other units should turn off due to an alarm, maintenance or power feed interruption
- Turning on reserve units to offset the excessive thermal load
- Checking up to 10 units with a single user terminal (shared user terminal)



DEMAND LIMIT


Demand Limit function is part of the control software for machines with double refrigerant circuit. It allows to limit the absorbed current of the machine. The function must be activated and configured. A digital inlet on electrical panel connecting terminals allows the remote enabling of the function with an external signal without tension. The software allows to select the resources to disable (electric heaters,...).

ACTIVE REDUNDANCY



Chilled water units, thanks to its electronically commutated EC fans, 2-way motorized valves for chilled water flow control and an advanced algorithm to balance the heat loads among the units (including the units in stand-by), achieve an ACTIVE REDUNDANCY combining reliability, efficiency and reduced Total Cost of Ownership.

PASSIVE REDUNDANCY

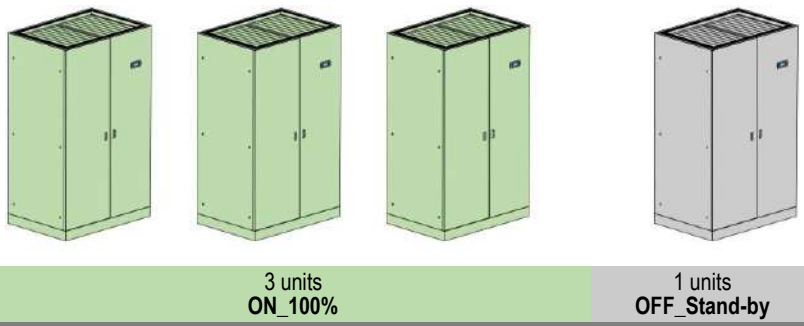

ACTIVE REDUNDANCY



TEMPERATURE PROBE ON AIR SUCTION / DELIVERY



Temperature probe installed on the air suction and delivery of the unit. Standard temperature control and regulation are on air delivery. Is possible to select the optional accessory A791 "Air temperature control on suction air" to realize the temperature control and regulation on suction air. With the following optional accessories installed temperature control and regulation are exclusively on suction air:

- A431 – Electric heater;
- A432 – Extra power electric heater;

POSSIBLE AIR INTAKE FOR OVER VERSIONS

OVER VERSION - AIR INTAKE FROM THE BOTTOM

Thanks to the particular basement design, it is possible to have the unit air intake from the bottom side. With this solution, it is necessary to foresee the optional blind frontal panels

OVER VERSION - AIR INTAKE FROM THE BACK SIDE

(Sizes E3P, E4, E5, E6, E7, E8, E9, E10 excluded)

It is possible to have the unit air intake from the back side.

Due to the limited size of the air intake, the air flow is limited to the 20% of the nominal one.

The air intake has to be made by Customer during installation.

In case the air intake is used for fresh air, it is necessary the temperature / humidity probe reposition in front of the heat exchanger, to allow for optimum reading of the values of temperature / humidity.


The electric cable of the probe has sufficient length for the repositioning.

AIR INTAKE FROM THE BACK SIDE

Back side view

VERSION OVER

E1 – E2 – E3

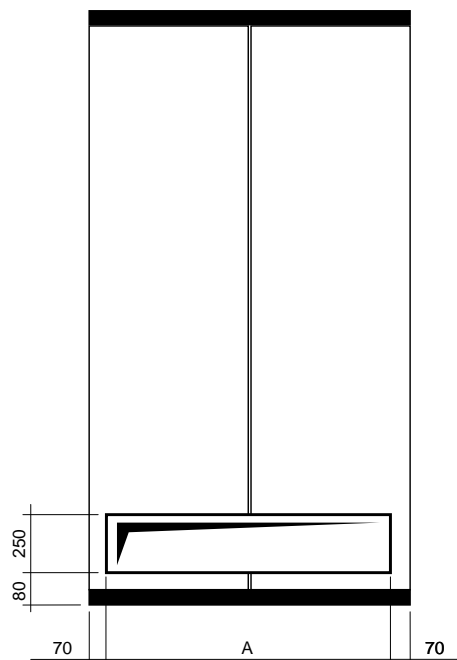

| SIZE | | E1 | E2 | E3 |
|--------------|-------------------|-----|------|------|
| A | mm | 510 | 645 | 945 |
| Max air flow | m ³ /h | 600 | 1000 | 1500 |

OPTIONAL ACCESSORIES: P121 – FRONT AIR INTAKE+BOTTOM PANEL

Available for OVER units.


The optional is not compatible with "P122 Bottom air intake+blind panels" for OVER units.

With this accessory, it is possible a noise insulation of the machine base, when the machine is installed directly on floor as raised floor, wood floor etc.

The accessory includes:

- Panel in galvanized steel sheet.
- Noise insulation with special soundproof material.

The bottom panel is supplied assembled inside the unit base and does not modify the unit dimensions.

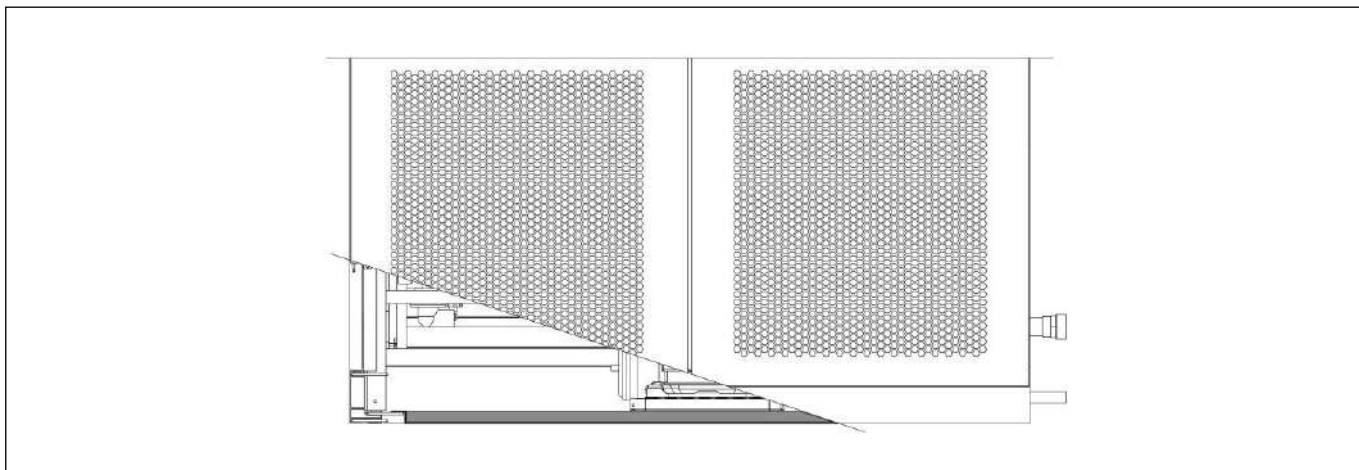


OPTIONAL ACCESSORIES: P122 - BOTTOM AIR INTAKE+BLIND PANELS

Available for OVER units.

The optional is not compatible with "P121 Front air intake+bottom panel" for OVER units.

Thanks to the design of the basement is possible the air suction from the unit bottom. The air flow rate is the nominal one

The accessory foresees the blind frontal panels.

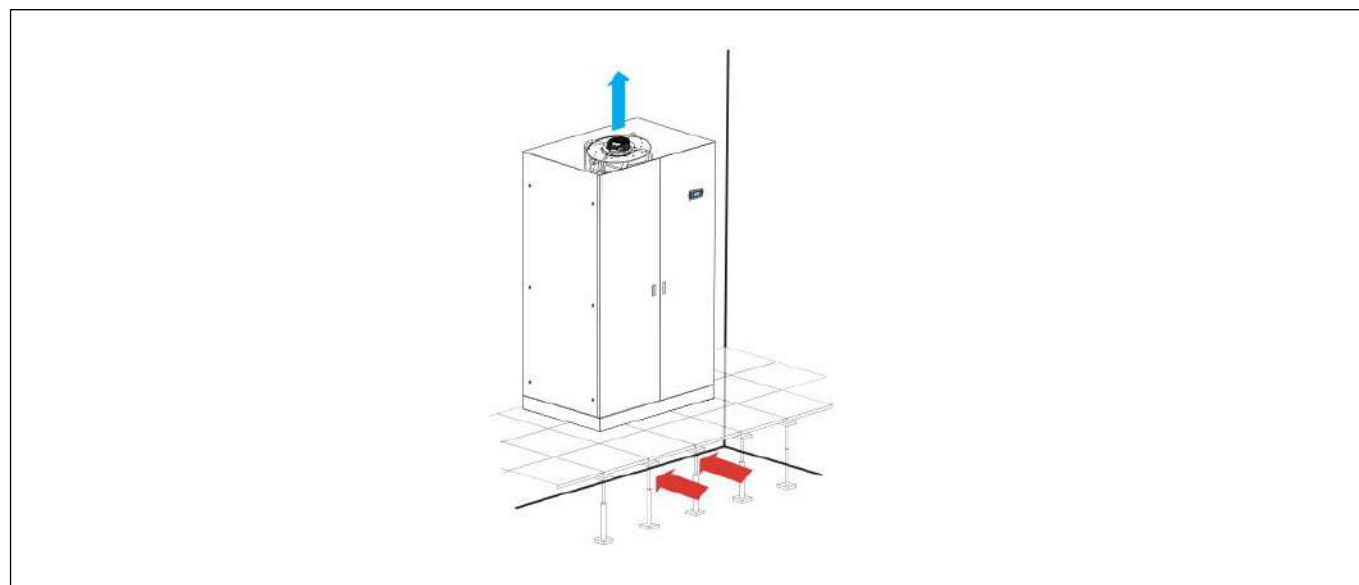

OPTIONAL ACCESSORIES: A548 - CONSTANT PREVALENCE



The optional is a differential pressure sensor with a 0...20mA output signal. The device is installed in the machine.

The sensor is connected to the microprocessor control of the indoor unit and allows the control of:

A548 - CONSTANT PREVALENCE

The system controls the air pressure in the raised floor (Under version) or in the duct (Over version). Through the relief piping of the room pressure (low pressure side) and the air supply of the fan (high pressure side) the fan rotation speed is controlled to keep the air pressure constant. Pressure control range from 0 to 100 Pa.

OPTIONAL ACCESSORIES: P091 – BACK-UP MODULE CONTROLLER



The optional is installed within the electrical panel.

The system powers the microprocessor for a few minutes in the event of a power failure or voltage surges, preventing the re-boot of the controller.

OPTIONAL ACCESSORIES: 383 – NUMBERED WIRINGS + UK REQUESTS

The machine's electrical cables are all numbered for easy identification. For the power section it is possible to change the colour for the UK market.

| CABLE | 383 – COLOUR FOR UK |
|--------------|---------------------|
| EARTH | YELLOW / GREEN |
| NEUTRAL | BLUE SKY |
| PHASE 1 (L1) | BROWN |
| PHASE 2 (L2) | BLACK |
| PHASE 3 (L3) | GREY |
| AUXILIARIES | RED |

OPTIONAL ACCESSORIES: 4181 – SERIAL CARD MODBUS



The card is factory installed.
Consult the Interface Manual for all technical information.

OPTIONAL ACCESSORIES: 4182 – SERIAL CARD LON



The card is factory installed.
The manufacturer will supply the serial card and .NXE file and a .XIF files necessary for LonWorks technicians to configure the network.
The board is programmed by the technician in charge of the integration.
Consult the Interface Manual for all technical information.

OPTIONAL ACCESSORIES: 4184 – SERIAL CARD BACNET MS/TP RS485



The card is factory installed.
The supervision network is set up by the technicians developing the BACnet interface.
The Modbus protocol database is used for interfacing.
Consult the Interface Manual for all technical information.

OPTIONAL ACCESSORIES: 4185 – SERIAL CARD BACNET OVER IP



The card is factory installed.
The supervision network is set up by the technicians developing the BACnet interface. The Modbus protocol database is used for interfacing.
The manufacturer will supply the card and .MIB file necessary for technicians to configure the network.
The board is programmed by the technician in charge of the integration.
Consult the Interface Manual for all technical information and what is necessary for Internet connection to view and modify variables.

OPTIONAL ACCESSORIES: A491 – WATER LEAKAGE DETECTOR



The system includes an electronic relay installed in the electrical panel of the machine and a water detector.
The electrical connections for the probe and the alarm contact are present in the machine's terminal board.
Sensor is supplied to be connected and installed at customer care.

OPTIONAL ACCESSORIES: A492 – WATER LEAKAGE DETECTOR + ADDITIONAL DETECTOR



The system includes an electronic relay installed in the electrical panel of the indoor machine and 2 water detectors to be connected in series.
The electrical connections for the probe and the alarm contact are present in the indoor machine's terminal board.
The sensors are supplied to be connected and installed at customer care.

OPTIONAL ACCESSORIES: A501 - CLOGGED FILTERS SENSOR



The system includes a differential pressure switch installed in the electrical panel or in the front of the indoor unit and the plastic hoses for the relief of the pressure upstream and downstream the air filters.

Control range: 0.3 ... 4.0 mbar (30 ... 400 Pa)
Differential for intervention: 0.15 mbar (15 Pa)

OPTIONAL ACCESSORIES: A511 – SMOKE DETECTOR
OPTIONAL ACCESSORIES: A521 – FIRE DETECTOR

Is possible to install one or both of the following sensors. Sensors are supplied in mounting kit. Installation within the room at customer care.



A511 - SMOKE DETECTOR

The device is supplied in mounting kit.
 The optical smoke detector senses the presence of combustion by-products (visible smoke) and activates an alarm.
 The operating principle is based on the light scattering technique (Tyndall effect).
 The device is in conformity to EN 54-7 standard.

Technical features:

| | | | |
|-----------------------|-------------------|---------------------|---------------------|
| Material | ABS | Relative humidity | <93% not-condensing |
| Power supply | 12...28 Vdc | Index of protection | IP 20 |
| Normal current | 50µA 24 Vdc | Testing by magnet | Yes |
| Alarm current | 25mA 24 Vdc | Relay | max. 1A 30Vdc |
| LED visibility | 360° (double led) | Signal repeater | 14mA 24 Vdc |
| Storage temperature | -10...+70°C | Covered area | 40m² max. |
| Operating temperature | -10...+70°C | Shielded connection | Min. 0.5 mm² |
| Max. speed air | 0.2 m/s | Colour | White |

Supplied with unit to be connected and installed at customer care close to the unit.



A521 - FIRE DETECTOR

The device is supplied in mounting kit.
 The fire detector has been designed to identify temperatures at which fires may start. When the temperature exceeds the set threshold or when there is a rapid variation in temperature, the relay is activated to signal an alarm.
 The device is in conformity to EN 54-5 standard.

Technical features:

| | | | |
|-----------------------|---------------------|---------------------|---------------|
| Material | ABS | Index of protection | IP 20 |
| Power supply | 12...28 Vdc | Testing by magnet | Yes |
| Normal current | 50µA 24 Vdc | Relay | max. 1A 30Vdc |
| Alarm current | 25mA 24 Vdc | Signal repeater | 14mA - 24 Vdc |
| LED visibility | 360° (double LED) | Alarm temperature | 62°C |
| Storage temperature | -10...+70°C | Covered area | 40m² max. |
| Operating temperature | -10...+70°C | Shielded connection | Min. 0.5 mm² |
| Relative humidity | <93% non-condensing | Colour | White |

Supplied with unit to be connected and installed at customer care close to the unit.

OPTIONAL ACCESSORIES: A822 – ADAPTIVE SET-POINT



ADAPTIVE SET-POINT

An advanced algorithm that instantaneously detects the real thermal load of the indoor units and then conveys this information to the outdoor chillers, strongly increasing their operation.

- Dynamic variation of the chillers set point and water flow.
- Increasing of the free cooling mode.
- Adoption of the active redundancy system to better exploit stand-by chillers.

DATA CENTER MANAGER (Optional accessory)

DATA CENTER MANAGER is a centralized management system that ensures a smart communication between indoor chilled water units and the outdoor chillers.
 The device manages the outdoor units according to the inlet and outlet temperature registered by the probes and by request of the indoor unit.

OPTIONAL ACCESSORIES: P141 – ANALOGUE SET-POINT COMPENSATION

Analogue set point compensation according to an external analogue signal at Customer care. The microprocessor control, through the additional module "expansion card", can manage a compensation signal of the return air setpoint by analogue input (0...1V; 0...5V; 0,5...4,5V; 4...20mA; 0...20mA). The compensation curve allows to assign a temperature setpoint offset respectively to the minimum and maximum signal managed by the input.

OPTIONAL ACCESSORIES: A842 – NETWORK ANALYZER



INTERNAL installation

The optional is installed within the electrical box downstream the main switch with door safety lock:

- Network transducer;
- Current transformers, one for each power supply phase cable.

This device provides continuous measurement of power consumption, monitoring current, voltage and power. These values are sent to unit microprocessor via RS485 serial cable, as shown on the unit wiring diagram.


The displayed variables are:

- Phase to phase voltage, only for three-phase units;
- Phase voltage (phase-neutral);
- Phase current;
- Neutral current only for three-phase units;
- Active phase power, only for three-phase units;
- Total active power;
- Active energy;
- Hour counts.

OPTIONAL ACCESSORIES: A812 – FREE-COOLING DIRECT CONTROL

Preparation of the machine and the electrical panel for the direct free-cooling system "P034 Intake free-cooling plenum "

OPTIONAL ACCESSORIES: P021 – 2-WAY BALL BYPASS VALVE (Main circuit)

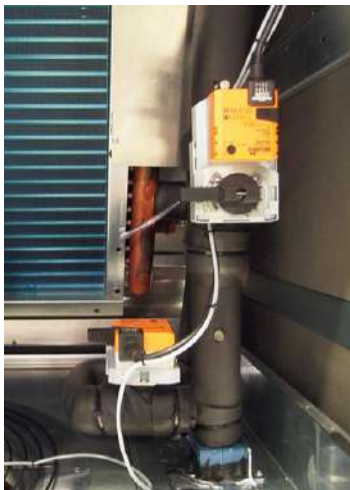

The optional is available for main chilled water circuit only. 2-way modulating motorized valve with 0÷10 VDC control actuator and emergency manual control for the third way (by-pass) of the hydraulic circuit.

The valve is in combination with the main 2-way water flow control valve. The optional accessory is factory installed and don't modify the overall dimensions of the unit.

The coupling to the main 2-way control valve of a second modulating valve, connected in by-pass, allows to obtain the same control system of a 3-way mixing valve for plant with constant water flow. At the same time the appropriate sizing of these valves allows hydraulic balancing of the by-pass way.


This type of valve offers the following series of benefits:

- Equal percentage flow control.
- No peaks initial flow.
- Excellent stability control thanks to the integrated characterizing disc.
- Excellent characteristic in partialisation.
- Stability in control.
- Maintenance free.
- Self-cleaning.

CHARACTERISTICS OF THE 2-WAY BALL VALVE

- Closing seal with leakage rate in Class A (EN 12266-1)
- Maximum fluid pressure $P_s=1600\text{kPa}$
- Maximum closing pressure (Close-off) $\Delta P_s=1400\text{kPa}$

The rotative actuator is controlled by a signal 0 ... 10VDC from the microprocessor controller. The actuator is equipped with an emergency button for manual operation and is maintenance-free.

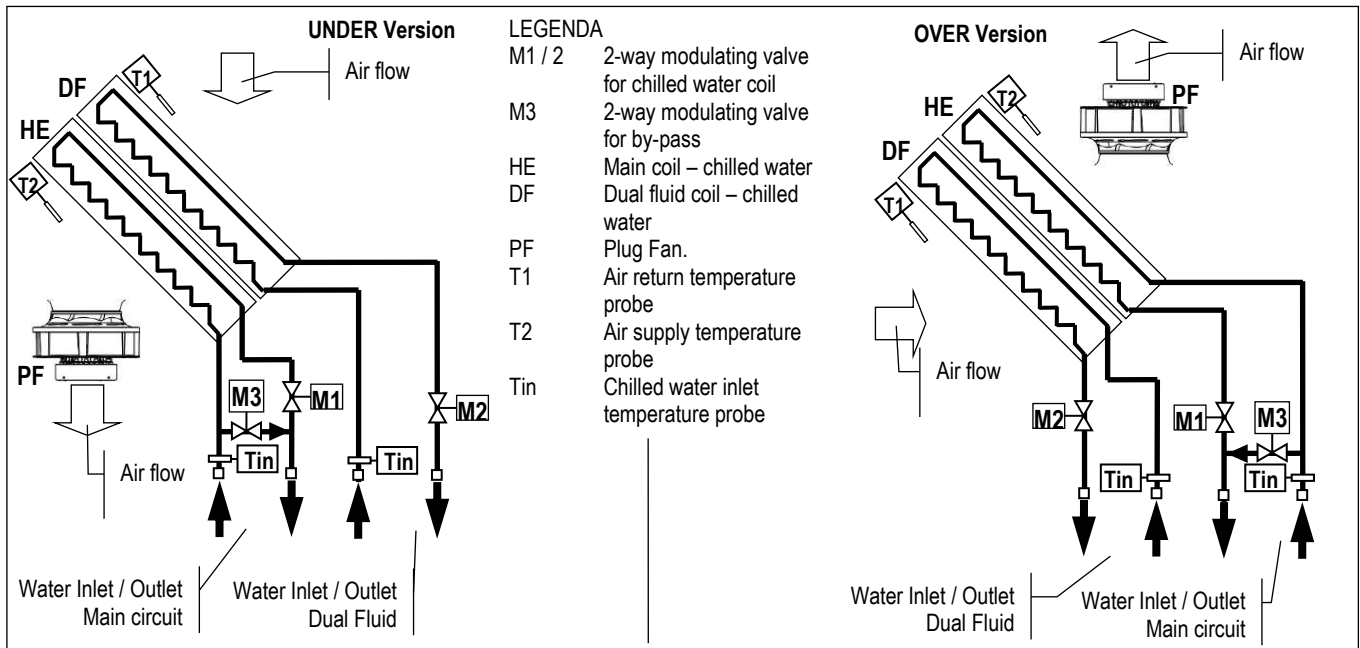

TECHNICAL DATA

| VERSION (1) | U / O | U / O | U / O | U / O | U / O | U / O | U / O | U / O | U / O | U / O | U | | |
|--------------------------------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|------|------|
| MODEL | 013 | 021 | 032 | 045 | 053 | 072 | 081 | 100 | 120 | 138 | 160 | | |
| SIZE | E1 | E2 | E3 | E3P | E4 | E5 | E6 | E7 | E8 | E9 | E10 | | |
| 2-WAY VALVE FOR BY-PASS | | | | | | | | | | | | | |
| k_v – Flow coefficient | m ³ /h | | 4,0 | 4,0 | 6,3 | 8,6 | 8,6 | 16,0 | 16,0 | 16,0 | 25,0 | 25,0 | 25,0 |

1. U = Under, downflow / O = Over, upflow

IMPORTANT

For further information, please refer to chapter “VALVE PRESSURE DROP CALCULATION AS FUNCTION OF WATER FLOW RATE”

OPTIONAL ACCESSORIES: A431 - ELECTRIC HEATERS

OPTIONAL ACCESSORIES: A432 – EXTRA POWER ELECTRIC HEATERS



A431 –ELECTRIC HEATERS

Electric heater consisting of finned aluminum elements, ensuring low surface temperature and deleting the air ionization problems. The optional is installed downstream the main cooling coil.

In electric heaters with three working steps the activation is binary type.

Components:

- Electric heater in aluminium armoured elements with integral fins
- Electrical control
- Safety thermostat.

Temperature control on suction air.

TECHNICAL DATA

| VERSION (1) | U / O | U / O | U / O | U / O | U / O | U / O | |
|-------------------------|-----------|------------|------------|------------|------------|------------|-------------|
| MODEL | 013 | 021 | 032 | 045 | 053 | 072 | |
| SIZE | E1 | E2 | E3 | E3P | E4 | E5 | |
| THERMAL CAPACITY | kW | 5,1 | 5,1 | 6,0 | 6,0 | 9,0 | 13,5 |
| Absorbed current (OA) | A | 7,4 | 7,4 | 8,7 | 8,7 | 13,0 | 19,5 |
| First working step | kW | 5,1 | 5,1 | 3,0 | 3,0 | 3,0 | 4,5 |
| Second working step | kW | -- | -- | 3,0+3,0 | 3,0+3,0 | 6,0 | 9,0 |
| Third working step | kW | -- | -- | -- | -- | 3,0+6,0 | 4,5+9,0 |
| NET WEIGHT (2) | kg | 4 | 4 | 7 | 7 | 9,5 | 10 |

1. U = Under, downflow / O = Over, upflow
2. Value to be added to the weight of the standard unit.

TECHNICAL DATA

| VERSION (1) | | U / O | U / O | U / O | U / O | U |
|-------------------------|-----------|-------------|-------------|-------------|-------------|-------------|
| MODEL | | 081 | 100 | 120 | 138 | 160 |
| SIZE | | E6 | E7 | E8 | E9 | E10 |
| THERMAL CAPACITY | kW | 13,5 | 13,5 | 18,0 | 18,0 | 27,0 |
| Absorbed current (OA) | A | 19,5 | 19,5 | 26,0 | 26,0 | 39,0 |
| First working step | kW | 4,5 | 4,5 | 4,5 | 4,5 | 9,0 |
| Second working step | kW | 9,0 | 9,0 | 13,5 | 13,5 | 18,0 |
| Third working step | kW | 4,5+9,0 | 4,5+9,0 | 4,5+13,5 | 4,5+13,5 | 9,0+18,0 |
| NET WEIGHT (2) | kg | 9,5 | 9,5 | 11 | 11 | 15 |

1. U = Under, downflow / O = Over, upflow
2. Value to be added to the weight of the standard unit.

A432 – EXTRA POWER ELECTRIC HEATERS

The components are the same standard accessory
Temperature control on suction air.

TECHNICAL DATA

| VERSION (1) | | U / O | U / O | U / O | U / O | U / O | U / O |
|-------------------------|-----------|-----------|-----------|------------|------------|-------------|-------------|
| MODEL | | 013 | 021 | 032 | 045 | 053 | 072 |
| SIZE | | E1 | E2 | E3 | E3P | E4 | E5 |
| THERMAL CAPACITY | kW | -- | -- | 9,0 | 9,0 | 13,5 | 18,0 |
| Absorbed current (OA) | A | -- | -- | 13,0 | 13,0 | 19,5 | 26,0 |
| First working step | kW | -- | -- | 4,5 | 4,5 | 4,5 | 4,5 |
| Second working step | kW | -- | -- | 4,5+4,5 | 4,5+4,5 | 9,0 | 13,5 |
| Third working step | kW | -- | -- | -- | -- | 4,5+9,0 | 4,5+13,5 |
| NET WEIGHT (2) | kg | -- | -- | 7 | 7 | 9,5 | 12 |

| VERSION (1) | | U / O | U / O | U / O | U / O | U |
|-------------------------|-----------|-------------|-------------|-------------|-------------|-------------|
| MODEL | | 081 | 100 | 120 | 138 | 160 |
| SIZE | | E6 | E7 | E8 | E9 | E10 |
| THERMAL CAPACITY | kW | 18,0 | 18,0 | 27,0 | 27,0 | 36,0 |
| Absorbed current (OA) | A | 26,0 | 26,0 | 39,0 | 39,0 | 52 |
| First working step | kW | 4,5 | 4,5 | 9,0 | 9,0 | 13,5 |
| Second working step | kW | 13,5 | 13,5 | 18,0 | 18,0 | 22,5 |
| Third working step | kW | 4,5+13,5 | 4,5+13,5 | 9,0+18,0 | 9,0+18,0 | 13,5+22,5 |
| NET WEIGHT (2) | kg | 11,5 | 11,5 | 14,5 | 14,5 | 18,5 |

1. U = Under, downflow / O = Over, upflow
2. Value to be added to the weight of the standard unit.

OPTIONAL ACCESSORIES: 4301 – STEAM HUMIDIFIER 3KG/H

OPTIONAL ACCESSORIES: 4303 – STEAM HUMIDIFIER 8KG/H

OPTIONAL ACCESSORIES: 4305 – STEAM HUMIDIFIER 15KG/H



Modulating steam humidifier with immersed electrodes fitted with safety and running accessories.

The optional includes the control board.

The optional requires mandatory accessory "P161 T/rH air intake sensor".

The optional is factory installed and requires only water filling connection.


Humidifier water charge and discharge pipes are not supplied.

It is recommended to install a filter and a shut-off valve on the pipe to the water inlet.

This humidifier produces non-pressurized steam by electrodes immersed in the water inside the cylinder: they bring the electric phase in the water that works as an electrical resistance and overheats. The steam so produced is distributed with dedicated distributors and used for ambient humidification or for industrial processes.

CHARACTERISTICS OF THE SUPPLY WATER

The quality of the used water influences the evaporation process, so the humidifier can be fed with **not-treated water, only when potable and non-demineralised.**



Humidifier control board

LIMIT VALUES

| | | Min | Max |
|---------------------------------------|-------------------------------------|---------|-----|
| Hydrogen ions | pH | 7 | 8,5 |
| Specific conductivity at 20°C | $\sigma_{R, 20^\circ C}$ $\mu S/cm$ | 350 | 750 |
| Total dissolved solids | TDS mg/l | (1) | (1) |
| Dry residue at 180°C | R ₁₈₀ mg/l | (1) | (1) |
| Total hardness | TH mg/l CaCO ₃ | 100 (2) | 400 |
| Temporary hardness | mg/l CaCO ₃ | 60 (3) | 300 |
| Iron + Manganese | mg/l Fe + Mn | 0 | 0,2 |
| Chlorides | ppm Cl | 0 | 30 |
| Silica | mg/l SiO ₂ | 0 | 20 |
| Residual chlorine | mg/l Cl ⁻ | 0 | 0,2 |
| Calcium sulphate | mg/l CaSO ₄ | 0 | 100 |
| Metallic impurities | mg/l | 0 | 0 |
| Solvents, diluents, soaps, lubricants | mg/l | 0 | 0 |

(1) Values depending on specific conductivity; in general: $TDS \cong 0,93 * \sigma_{R, 20^\circ C}$; $R_{180} \cong 0,65 * \sigma_{R, 20^\circ C}$

(2) Not lower than 200% of the chloride content in mg/l di Cl⁻

(3) Not lower than 300% of the chloride content in mg/l di Cl⁻

WARNING:

- Use only with drinking water.
- There is no reliable relationship between hardness and water conductivity
- Do not treat water with softeners! This could cause corrosion of the electrodes or the formation of foam, leading to potential operating problems or failures.
- Do not add disinfectants or corrosion inhibitors to water, as these substances are potentially irritant.
- Is absolutely forbidden to use well water, industrial water or water drawn from cooling circuits; in general, avoid using potentially contaminated water, either from a chemical or bacteriological point of view.

HUMIDIFIER

TECHNICAL DATA

| VERSION (1) | | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U | |
|----------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| MODEL | | 013 | 021 | 032 | 045 | 053 | 072 | 081 | 100 | 120 | 138 | 160 |
| SIZE | | E1 | E2 | E3 | E3P | E4 | E5 | E6 | E7 | E8 | E9 | E10 |
| VAPOUR PRODUCTION | kg/h | 3,0 | 3,0 | 3,0 | 3,0 | 8,0 | 8,0 | 8,0 | 15,0 | 15,0 | 15,0 | 15,0 |
| Power input | kW | 2,3 | 2,3 | 2,3 | 2,3 | 6,0 | 6,0 | 6,0 | 11,3 | 11,3 | 11,3 | 11,3 |
| Absorbed current (OA) | A | 3,2 | 3,2 | 3,2 | 3,2 | 8,7 | 8,7 | 8,7 | 16,2 | 16,2 | 16,2 | 16,2 |
| Max absorbed current (FLA) | A | 4,5 | 4,5 | 4,5 | 4,5 | 12,4 | 12,4 | 12,4 | 23,0 | 23,0 | 23,0 | 23,0 |
| Water content | l | 3,9 | 3,9 | 3,9 | 3,9 | 6,4 | 6,4 | 6,4 | 10,3 | 10,3 | 10,3 | 10,3 |
| Max water supply pressure | Bar | 1÷8 | 1÷8 | 1÷8 | 1÷8 | 1÷8 | 1÷8 | 1÷8 | 1÷8 | 1÷8 | 1÷8 | 1÷8 |
| NET WEIGHT (2) | kg | 4 | 5 | 6 | 6 | 10 | 12 | 14 | 16 | 18 | 20 | 20 |
| HYDRAULIC CONNECTION | | | | | | | | | | | | |
| WATER INLET - ISO 228/1 – G M | Ø | 3/4" | 3/4" | 3/4" | 3/4" | 3/4" | 3/4" | 3/4" | 3/4" | 3/4" | 3/4" | 3/4" |
| WATER OUTLET - external diameter | Ø mm | 19 | 19 | 19 | 19 | 19 | 19 | 19 | 19 | 19 | 19 | 19 |

EXTRA POWER HUMIDIFIER

The optional is not available for sizes E1, E2, E3, E7, E8, E9, E10.

The components are the same standard accessory

TECHNICAL DATA

| VERSION (1) | | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U | |
|----------------------------------|------|-----|-----|-----|------|------|------|------|-----|-----|-----|-----|
| MODEL | | 013 | 021 | 032 | 045 | 053 | 072 | 081 | 100 | 120 | 138 | 160 |
| SIZE | | E1 | E2 | E3 | E3P | E4 | E5 | E6 | E7 | E8 | E9 | E10 |
| VAPOUR PRODUCTION | kg/h | -- | -- | -- | 8,0 | 15,0 | 15,0 | 15,0 | -- | -- | -- | -- |
| Power input | kW | -- | -- | -- | 6,0 | 11,3 | 11,3 | 11,3 | -- | -- | -- | -- |
| Absorbed current (OA) | A | -- | -- | -- | 8,7 | 16,2 | 16,2 | 16,2 | -- | -- | -- | -- |
| Max absorbed current (FLA) | A | -- | -- | -- | 12,4 | 23,0 | 23,0 | 23,0 | -- | -- | -- | -- |
| Water content | l | -- | -- | -- | 6,4 | 10,3 | 10,3 | 10,3 | -- | -- | -- | -- |
| Max water supply pressure | Bar | -- | -- | -- | 1÷8 | 1÷8 | 1÷8 | 1÷8 | -- | -- | -- | -- |
| NET WEIGHT (2) | kg | -- | -- | -- | 10 | 16 | 16 | 16 | -- | -- | -- | -- |
| HYDRAULIC CONNECTION | | | | | | | | | | | | |
| WATER INLET - ISO 228/1 – G M | Ø | -- | -- | -- | 3/4" | 3/4" | 3/4" | 3/4" | -- | -- | -- | -- |
| WATER OUTLET - external diameter | Ø mm | -- | -- | -- | 19 | 19 | 19 | 19 | -- | -- | -- | -- |

1. U = Under, downflow / O = Over, upflow

2. Value to be added to the weight of the standard unit. Does not include the weight of the water content.

OPTIONAL ACCESSORIES: P051 – DEHUMIDIFICATION FUNCTION

The optional requires mandatory accessory "P161 T/rH air intake sensor".

Components:

- T/rH air intake sensor.
- Temperature sensor on cooling coil water inlet / outlet.
- Electronic control system of the dew point temperature for the combined intervention of cooling capacity and air flow.

OPTIONAL ACCESSORIES: P161 – T/RH AIR INTAKE SENSOR

OPTIONAL ACCESSORIES: P071 – REMOTE T/RH PROBE



P161: T/RH AIR INTAKE SENSOR

The accessory replaces the temperature sensor installed on the air intake in the unit and allows the displaying of the relative humidity room value

The sensor is mandatorily required with following option:

- 4301 / 4303 / 4305 Humidifier
- P051: Dehumidification function;
- P034 Intake free-cooling plenum.

P071: REMOTE T/RH PROBE

The accessory is added to the standard temperature sensor or to the temperature / humidity sensor (optional) on the machine air intake. For indoor installation in a specific point of the room to be conditioned.

OPTIONAL ACCESSORIES: 4666 – EXTERNAL AIR PROBE



The probe must be installed protected against atmospheric agent and allows the displaying of the external air temperature.

The sensor is mandatorily required with following option:

- P034 Intake free-cooling plenum.

OPTIONAL ACCESSORIES: P111 – DUAL POWER SUPPLY

OPTIONAL ACCESSORIES: P112 – DUAL POWER SUPPLY + OPTIONAL

OPTIONAL ACCESSORIES: P113 – DUAL POWER SUPPLY KIT

OPTIONAL ACCESSORIES: P114 – DUAL POWER SUPPLY KIT + OPTIONAL



The motorised changeover switches automatically manage changeover under load between two three-phase power supplies, or manually for emergency operations.

These devices are suitable for low voltage systems with interruption of the supply to the load during transfer.

The model supplied in the automatic version checks the source and switches over automatically, based on configurable parameters.

OPEN TRANSITION TYPE TRANSFER SWITCH WITH A MINIMUM INTERRUPTION OF THE SUPPLY DURING TRANSFER.

To maintain the microprocessor powered and avoid its restarts it is suggested the "P091 Back-up module controller" optional accessory. The back-up module guarantees the microprocessor power supply for a few minutes, in case of supply voltage failure.


INSTALLATION

| Frame | Power Supply | Installation | Code |
|-------|--------------|---------------------------------------|----------------|
| E1 | 400/3+N/50 | EXTERNAL to the unit, supplied in kit | P113, P114 (*) |
| E2 | 400/3+N/50 | EXTERNAL to the unit, supplied in kit | P113, P114 (*) |
| E3 | 400/3+N/50 | EXTERNAL to the unit, supplied in kit | P113, P114 (*) |
| E3P | 400/3+N/50 | EXTERNAL to the unit, supplied in kit | P113, P114 (*) |
| E4 | 400/3+N/50 | EXTERNAL to the unit, supplied in kit | P113, P114 (*) |
| E5 | 400/3+N/50 | INTERNAL (on unit electrical panel) | P111, P112 (*) |
| E6 | 400/3+N/50 | INTERNAL (on unit electrical panel) | P111, P112 (*) |
| E7 | 400/3+N/50 | INTERNAL (on unit electrical panel) | P111, P112 (*) |
| E8 | 400/3+N/50 | INTERNAL (on unit electrical panel) | P111, P112 (*) |
| E9 | 400/3+N/50 | INTERNAL (on unit electrical panel) | P111, P112 (*) |
| E10 | 400/3+N/50 | INTERNAL (on unit electrical panel) | P111, P112 (*) |

(*) P112, P114 for units with optional (with electric heaters and/or humidifier)

MOUNTING KIT

For EXTERNAL installation, the optional accessory is supplied in special box with IP 3X ingress protection, with the dimensions shown in the figure below.

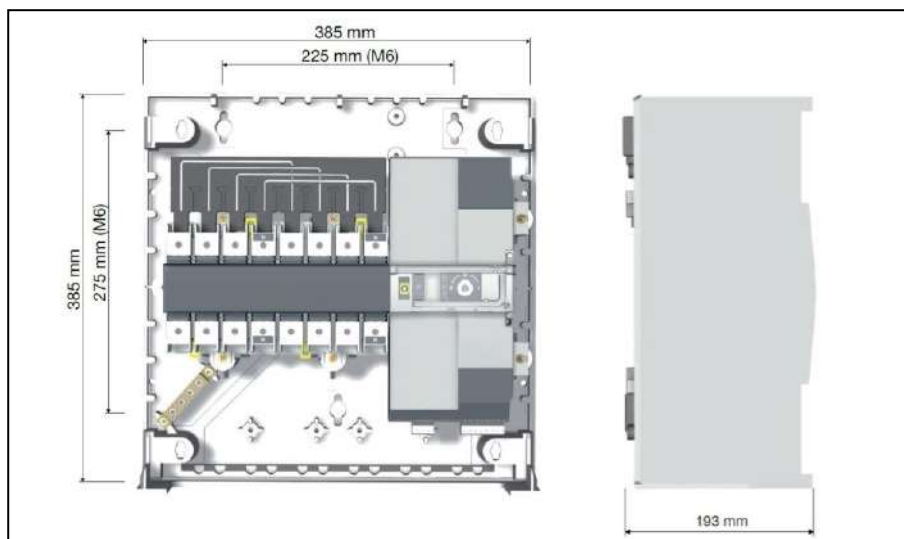

OPTIONAL ACCESSORIES: A381 - DRAIN PUMP



A plastic case contains the vertical type pump, the water tank with float plus safety switch and hydraulic and electric connection.

Together the pump 10 linear meters anti-crushing plastic discharge spiral tube is supplied. The optional must be installed as shown in the documentation delivered together with the unit.

Wiring includes power supply and an alarm, displayed on microprocessor, that includes motor pump thermal protection and tank overflow.

The condensate discharge pump operation is fully automatic.

WARNING

For all the machines the optional accessory is supplied in mounting kit.

TECHNICAL DATA

Power supply: 230V~ 50Hz
 Electrical data: 70W – 0,67A
 Maximum water flow: 500 l/h
 Maximum delivery height: 5.0 m
 Sound level: 45dBA a 1 m
 Maximum water temperature: 70°C
 Water acidity: pH>2.5
 Tray volume: 2.0 l
 Protection IP 20

CONDENSATE DISCHARGE PUMP

(Dimensions in millimetres)

OPERATING DATA

| Discharge head | Total length of discharge pipes (Ø 10 mm internal) | | | |
|----------------|--|-----|-----|-----|
| | 5m | 10m | 20m | 30m |
| 1m | 380 | 300 | 240 | 190 |
| 2m | 310 | 260 | 200 | 150 |
| 3m | 240 | 200 | 145 | 110 |
| 4m | 150 | 130 | 80 | 60 |
| 5m | 30 | 20 | 0 | 0 |


OPTIONAL ACCESSORIES: P084 – AIR FILTER ePM₁₀ 50%

The ePM₁₀ 50% air filters (according to ISO EN 16890), replace the standard one. The filters generate a pressure drops higher than the standard ones. The filters are made of glass micro-fibre and are not regenerable.

| VERSION (1) | U / O | U / O | U / O | U / O | U / O | U / O | U / O | U / O | U / O | U / O | U | |
|-------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-----|----|
| MODEL | 013 | 021 | 032 | 045 | 053 | 072 | 081 | 100 | 120 | 138 | 160 | |
| SIZE | E1 | E2 | E3 | E3P | E4 | E5 | E6 | E7 | E8 | E9 | E10 | |
| Additional pressure drops (1) | Pa | 58 | 78 | 102 | 94 | 68 | 65 | 73 | 77 | 60 | 78 | 63 |

1. U = Under, downflow / O = Over, upflow
2. Additional pressure drops referred to nominal air flow and clean filter.


OPTIONAL ACCESSORIES: A531 – ON-OFF DAMPER

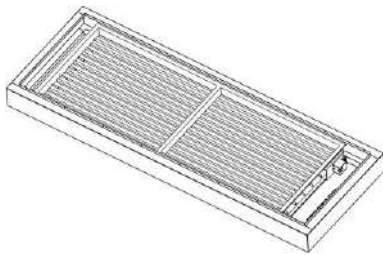

Non-return air damper with frame driven by electric servomotor.
Accessory installed on unit air delivery and it can be matched to plenums and support frame.
The accessory requires mandatory accessory "9973 Wooden cage packing".

FRAMEWORK


- Frame in galvanized steel sheet with protective surfaces treatment in compliance with UNI ISO 9227/ASTMB117 and ISO 7253, and painted with epoxy powders. Colour RAL 9005;
- Opposed blade dampers in galvanized steel sheet.
- Actuator for damper control.
- Terminals for electric connection to the unit.
- Set of fixing elements to fasten the damper to the unit.

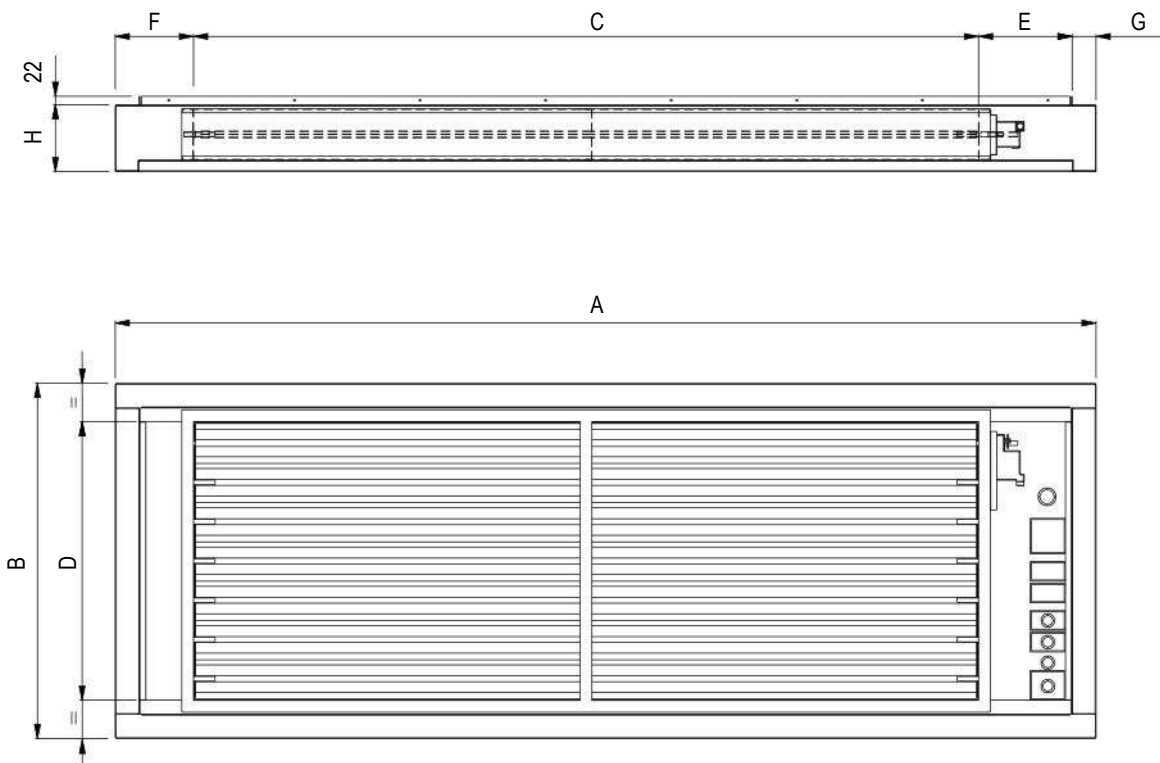

| VERSION (1) | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U | |
|-------------|-----|-----|-----|------|------|------|------|-------|-------|-------|-------|------|
| SIZE | E1 | E2 | E3 | E3P | E4 | E5 | E6 | E7 | E8 | E9 | E10 | |
| A | mm | 650 | 785 | 1085 | 1085 | 1305 | 1630 | 1873 | 2175 | 2499 | 2899 | 3510 |
| B | mm | 650 | 650 | 750 | 905 | 905 | 905 | 905 | 905 | 905 | 905 | 905 |
| C | mm | 300 | 450 | 750 | 750 | 900 | 1250 | 1500 | 1750 | 2000 | 2300 | 2800 |
| D | mm | 510 | 510 | 610 | 710 | 710 | 710 | 710 | 710 | 710 | 710 | 710 |
| E | mm | 231 | 216 | 216 | 216 | 142 | 204 | 250,5 | 226,5 | 238,5 | 288,5 | 294 |
| F | mm | 73 | 73 | 73 | 73 | 202 | 115 | 61,5 | 137,5 | 199,5 | 249,5 | 355 |
| G | mm | 46 | 46 | 46 | 46 | 61 | 61 | 61 | 61 | 61 | 61 | 61 |
| H | mm | 170 | 170 | 170 | 170 | 170 | 170 | 170 | 170 | 170 | 170 | 170 |
| Weight (2) | kg | 20 | 23 | 30 | 35 | 40 | 50 | 58 | 65 | 75 | 90 | 115 |

1. U = Under, downflow / O = Over, upflow
2. Add this value to the total unit weight

INSTALLATION EXAMPLE

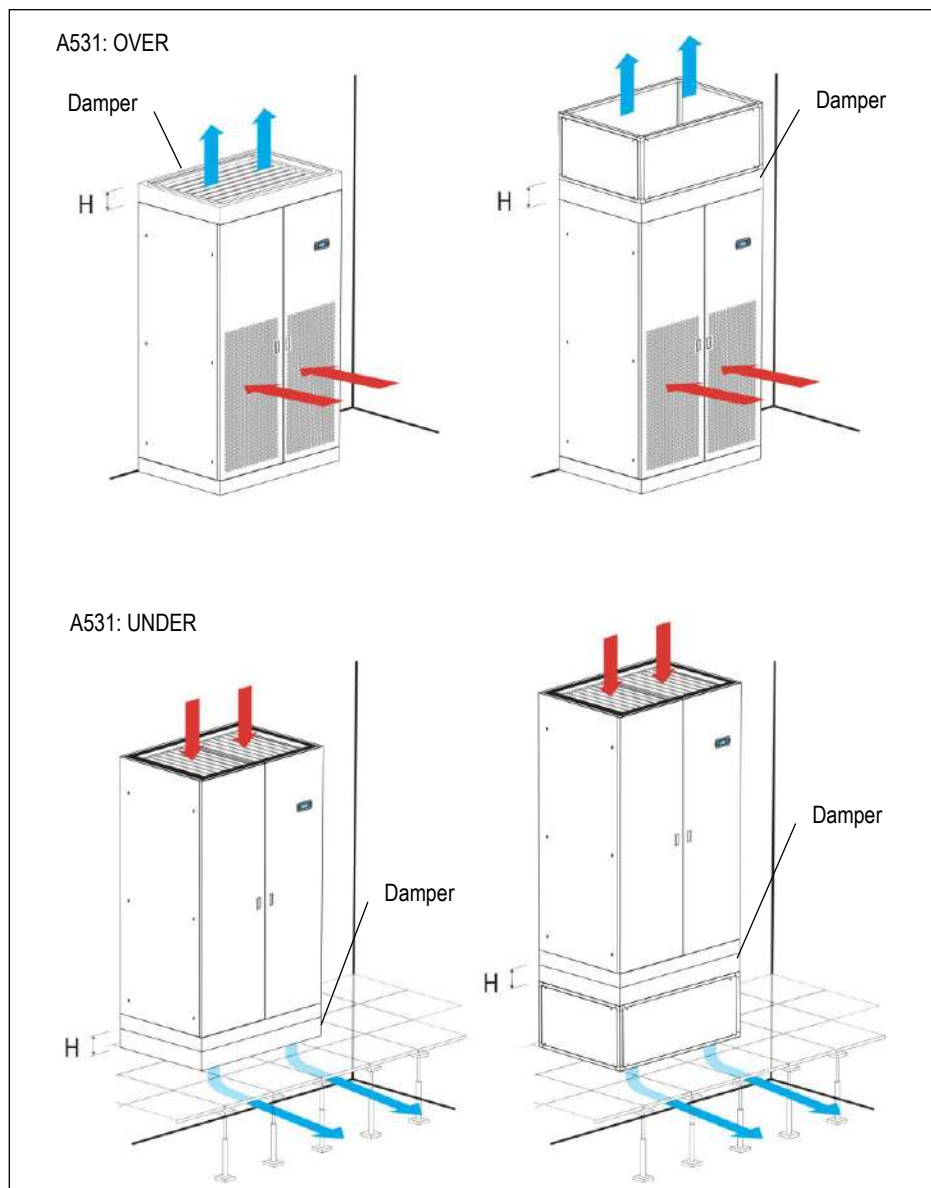

WORKING LOGIC

The damper opens at supply fans activation to allow air flow.
 When the fans stop for failure or stop command, the damper closes, preventing air flow into the unit.

OPTIONAL ACCESSORIES: P011 - EMPTY PLENUM

OPTIONAL ACCESSORIES: P012 - EMPTY PLENUM CL.A1

OPTIONAL ACCESSORIES: P031 - EMPTY INTAKE PLENUM

OPTIONAL ACCESSORIES: P032 - EMPTY INTAKE PLENUM CL.A1

OPTIONAL ACCESSORIES: P013 - PLENUM + 3 GRILLES

OPTIONAL ACCESSORIES: P014 - PLENUM + 3 GRILLES CL.A1





OPTIONAL ACCESSORIES: P015 - SILENCED PLENUM

OPTIONAL ACCESSORIES: P016 - SILENCED PLENUM + 1 GRILLE

OPTIONAL ACCESSORIES: P017 - PLENUM + FILTER EPM2.5 50%

OPTIONAL ACCESSORIES: P018 - PLENUM + FILTER EPM1 50%

OPTIONAL ACCESSORIES: P019 - PLENUM + FILTER EPM1 85%

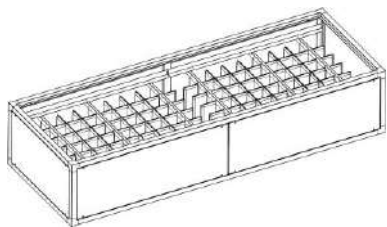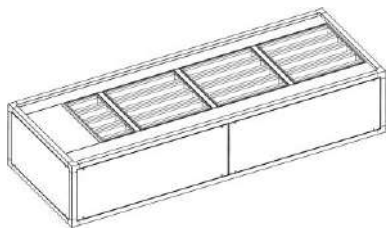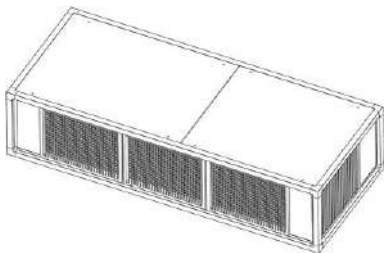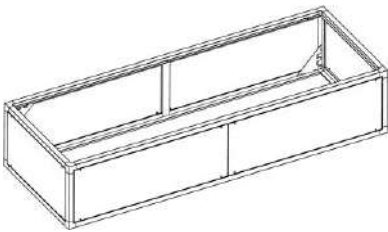

The optional is supplied separately and the installation on the unit is at Customer care.
The plenums have same technical characteristics and base dimensions of the machine cabinet.

It is possible to install only a single plenum to ensure stability to the unit.

FRAMEWORK


- Frame in aluminium extrusion, painted with epoxy powders. Colour RAL 9005;
- Panels in galvanized steel sheet with protective surfaces treatment in compliance with UNI ISO 9227/ASTMB117 and ISO 7253, and painted with epoxy powders. Colour RAL 9005;
- Panels insulated with polyurethane foam and seals to ensure air tight.
- Panels fixed with screws.
- Removable panels.
- Set of fixing elements to fasten the plenum to the unit.

WARNING

In UNDER version units the hydraulic piping is inside the machine.

The air delivery plenums sometime don't allow the extension of the pipes downwards.

In special cases, to keep the connections inside the machine, foresee a plenum 200mm higher than the standard one.



P011 / P012 – P031 / P032: EMPTY PLENUM

The plenum is void and can be used to rise the intake/delivery air inlet/outlet. Remove the frontal panels for inspection.

Also available with fire reaction in class "0" or "A1" (EN 13501-1).

The optional accessories "P031 Empty intake plenum, for OVER version" and "P032 Empty intake plenum CL.A1, for OVER version" require mandatory accessory "P122 Bottom air intake+blind panels, for OVER version only".

P011 / P012 OVER


P031 / P032 OVER

P011 / P012 UNDER

P031 / P032 UNDER

| VERSION (1) | | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U |
|------------------------------------|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| SIZE | | E1 | E2 | E3 | E3P | E4 | E5 | E6 | E7 | E8 | E9 | E10 |
| A | mm | 490 | 490 | 490 | 510 | 510 | 510 | 510 | 510 | 510 | 510 | 510 |
| Weight (2) | kg | 20 | 21 | 20 | 25 | 30 | 40 | 45 | 50 | 60 | 70 | 78 |
| Weight CL.0 or A1 (EN 13501-1) (2) | kg | 25 | 27 | 27 | 33 | 39 | 50 | 56 | 62 | 74 | 85 | 96 |

1. U = Under, downflow / O = Over, upflow
 2. Add this value to the total unit weight



P013 / P014: PLENUM + 3 GRILLES

The plenum must be installed on air delivery.

The plenum allows the air distribution directly into the room. The plenum is supplied with air distribution grilles with double row adjustable grilles on front and lateral side.


Also available with fire reaction in class "0" or "A1" (EN 13501-1).

P013 / P014 OVER

P013 / P014 UNDER

| VERSION (1) | | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U |
|------------------------------------|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| SIZE | | E1 | E2 | E3 | E3P | E4 | E5 | E6 | E7 | E8 | E9 | E10 |
| A | m | 490 | 490 | 490 | 510 | 510 | 510 | 510 | 510 | 510 | 510 | 510 |
| Weight (2) | kg | 21 | 23 | 30 | 36 | 45 | 50 | 65 | 75 | 90 | 100 | 120 |
| Weight CL.0 or A1 (EN 13501-1) (2) | kg | 25 | 28 | 37 | 44 | 54 | 61 | 77 | 89 | 106 | 118 | 142 |


1. U = Under, downflow / O = Over, upflow
 2. Add this value to the total unit weight




P015: SILENCED PLENUM

The plenum must be installed on air delivery.
 The plenum is fitted with noise absorption partitions to reduce the noise emission.
 Remove the frontal panels for inspection.

P015 OVER

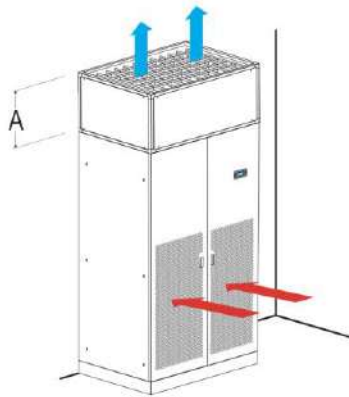

P015 UNDER

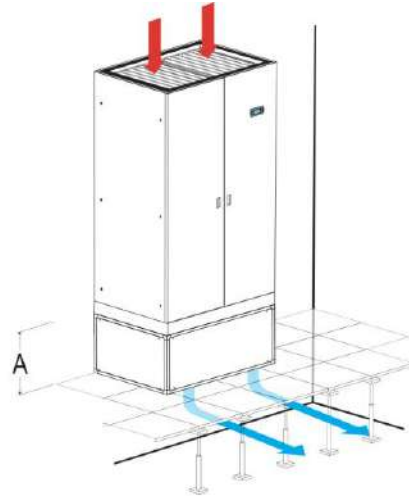


| VERSION (1) | | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U |
|-------------|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| SIZE | | E1 | E2 | E3 | E3P | E4 | E5 | E6 | E7 | E8 | E9 | E10 |
| A | mm | 490 | 490 | 490 | 510 | 510 | 510 | 510 | 510 | 510 | 510 | 510 |
| Weight (2) | kg | 25 | 27 | 30 | 36 | 45 | 50 | 65 | 80 | 90 | 100 | 120 |

1. U = Under, downflow / O = Over, upflow
2. Add this value to the total unit weight

ACOUSTIC DATA

| VERSION (1) | | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U |
|-------------------------------|-------------------|------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|
| MODEL | | 013 | 021 | 032 | 045 | 053 | 072 | 081 | 100 | 120 | 138 | 160 |
| SIZE | | E1 | E2 | E3 | E3P | E4 | E5 | E6 | E7 | E8 | E9 | E10 |
| NOISE LEVEL (2) | | | | | | | | | | | | |
| On air delivery Under | dB(A) | 62,1 | 70,6 | 72,0 | 74,5 | 75,1 | 75,5 | 75,9 | 76,9 | 80,3 | 79,8 | 79,1 |
| On air intake Under | dB(A) | 56,0 | 60,9 | 62,1 | 66,2 | 66,7 | 65,6 | 67,5 | 68,5 | 70,4 | 71,4 | 70,7 |
| On front side Under | dB(A) | 46,7 | 51,4 | 52,5 | 56,7 | 57,2 | 56,0 | 58,1 | 59,0 | 60,8 | 61,9 | 61,2 |
| On air delivery Over | dB(A) | 62,1 | 70,6 | 72,0 | 74,5 | 75,1 | 75,5 | 75,9 | 76,9 | 80,3 | 79,8 | -- |
| On air intake Over (3) | dB(A) | 50,8 | 55,3 | 56,6 | 60,7 | 61,2 | 60,1 | 62,1 | 63,0 | 64,9 | 62,6 | -- |
| On front side Over (4) | dB(A) | 46,7 | 51,4 | 52,5 | 56,7 | 57,2 | 56,0 | 58,1 | 59,0 | 60,8 | 58,6 | -- |
| Additional pressure drops (5) | Pa | 24 | 29 | 48 | 60 | 64 | 63 | 72 | 79 | 61 | 82 | 131 |
| Air flow | m ³ /h | 2850 | 4800 | 7800 | 10800 | 13100 | 16350 | 20000 | 24200 | 28300 | 33100 | 37150 |


1. U = Under, downflow / O = Over, upflow
2. Noise pressure level at 1 meter in free field – ISO 3744
3. Air intake from the front
4. Air intake from the bottom
5. Value to be subtracted from the nominal external static pressure of the unit.



P016: SILENCED PLENUM + 1 GRILLE

The plenum must be installed on air delivery.

The plenum allows the frontal air distribution directly into the room and a noise reduction of the air delivery. The plenum is supplied with air distribution grille with double row adjustable grilles on front side and noise absorption partitions.

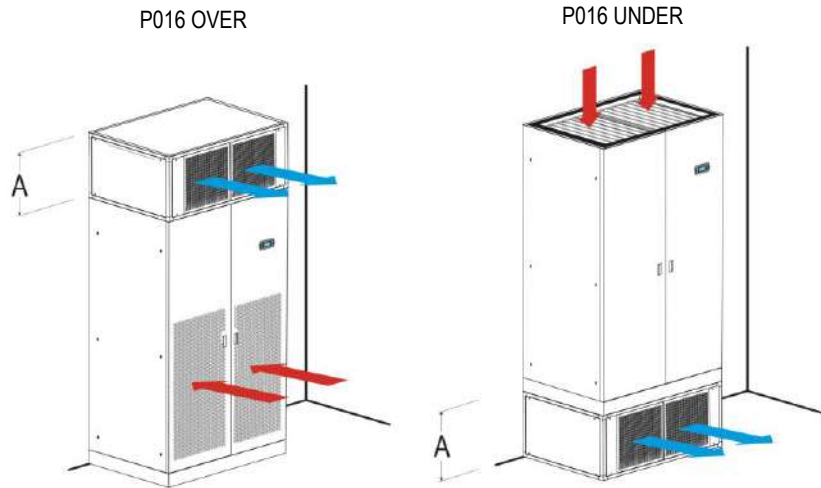


| VERSION (1) | | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U |
|-------------|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| SIZE | | E1 | E2 | E3 | E3P | E4 | E5 | E6 | E7 | E8 | E9 | E10 |
| A | mm | 490 | 490 | 490 | 510 | 510 | 510 | 510 | 510 | 510 | 510 | 510 |
| Weight (2) | kg | 30 | 30 | 37 | 45 | 67 | 72 | 78 | 88 | 110 | 130 | 150 |

1. U = Under, downflow / O = Over, upflow
2. Add this value to the total unit weight

ACOUSTIC DATA

| VERSION (1) | | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U/O | U |
|-------------------------------|-------|------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|
| MODEL | | 013 | 021 | 032 | 045 | 053 | 072 | 081 | 100 | 120 | 138 | 160 |
| SIZE | | E1 | E2 | E3 | E3P | E4 | E5 | E6 | E7 | E8 | E9 | E10 |
| SOUND LEVEL (2) | | | | | | | | | | | | |
| On air delivery Under | dB(A) | 60,0 | 70,5 | 71,7 | 74,0 | 73,8 | 75,1 | 75,4 | 76,1 | 79,3 | 78,8 | 78,0 |
| On air intake Under | dB(A) | 55,3 | 61,0 | 62,5 | 66,2 | 66,1 | 65,9 | 67,6 | 68,4 | 70,0 | 71,1 | 70,3 |
| On front side Under | dB(A) | 46,0 | 51,5 | 52,9 | 56,8 | 56,6 | 56,3 | 58,2 | 58,9 | 60,5 | 61,6 | 60,8 |
| On air delivery Over | dB(A) | 60,0 | 70,5 | 71,7 | 74,0 | 73,8 | 75,1 | 75,4 | 76,1 | 79,3 | 78,8 | -- |
| On air intake Over (3) | dB(A) | 50,1 | 55,4 | 57,0 | 60,8 | 60,6 | 60,4 | 62,2 | 62,9 | 64,6 | 62,6 | -- |
| On front side Over (4) | dB(A) | 46,0 | 51,5 | 52,9 | 56,8 | 56,6 | 56,3 | 58,2 | 58,9 | 60,5 | 58,6 | -- |
| Additional pressure drops (5) | Pa | 60 | 100 | 118 | 150 | 159 | 157 | 178 | 196 | 180 | 204 | 180 |
| Air flow | m³/h | 2700 | 4650 | 7800 | 10800 | 12500 | 16350 | 20000 | 23200 | 27500 | 32500 | 35300 |


1. U = Under, downflow / O = Over, upflow
2. Noise pressure level at 1 meter in free field – ISO 3744
3. Air intake from the front
4. Air intake from the bottom
5. Value to be subtracted from the nominal external static pressure of the unit




P017 / P018 / P019: PLENUM + FILTER

The plenum must be installed on air delivery.
 The optional is not compatible with "P084 air filter ePM10 50%".
 The plenum is fitted with high efficiency rigid bag filters.
 Filters are made of glass micro fibre and are not regenerable.
 Remove the frontal panels for filters replacement.

P017 / P018 / P019 OVER

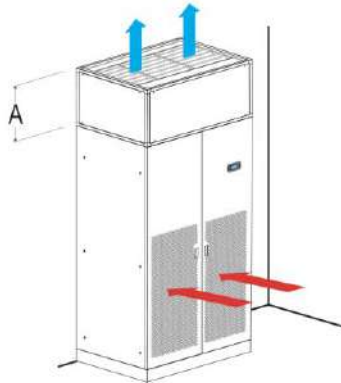

P017 / P018 / P019 UNDER

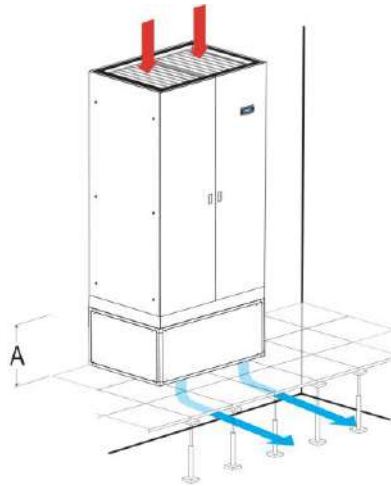



| VERSION (1) | | U / O | U / O | U / O | U / O | U / O | U / O | U / O | U / O | U / O | U / O | U |
|-------------|----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-----|
| SIZE | | E1 | E2 | E3 | E3P | E4 | E5 | E6 | E7 | E8 | E9 | E10 |
| A | mm | 490 | 490 | 490 | 510 | 510 | 510 | 510 | 510 | 510 | 510 | 510 |
| Weight (2) | kg | 26 | 27 | 30 | 33 | 45 | 55 | 65 | 80 | 90 | 100 | 120 |

1. U = Under, downflow / O = Over, upflow
2. Add this value to the total unit weight

| VERSION (1) | | U / O | U / O | U / O | U / O | U / O | U / O | U / O | U / O | U / O | U / O | U |
|------------------------------------|----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-----|
| SIZE | | E1 | E2 | E3 | E3P | E4 | E5 | E6 | E7 | E8 | E9 | E10 |
| PRESSURE DROPS (2) | | | | | | | | | | | | |
| Filters ISO ePM _{2.5} 50% | Pa | 67 | 114 | 152 | 153 | 137 | 151 | 185 | 165 | 140 | 183 | 145 |
| Filters ISO ePM ₁ 50% | Pa | 82 | 144 | 187 | 188 | 167 | 186 | 227 | 202 | 176 | 225 | 197 |
| Filters ISO ePM ₁ 85% | Pa | 100 | 179 | 226 | 228 | 204 | 226 | 295 | 265 | 237 | 272 | 216 |

1. U = Under, downflow / O = Over, upflow
2. Data referred to the nominal air flow and clean filters. Value to be subtracted from the nominal external static pressure of the unit.

OPTIONAL ACCESSORIES: P034 – INTAKE FREE-COOLING PLENUM



The optional is supplied separately and the installation on the unit is at Customer care.

The optional requires mandatory accessories "P161 T/rH air intake sensor", "4666 External air probe", "A812 Free-cooling direct control" and "P122 Bottom air intake+blind panels, for OVER version only".

The plenums have same technical characteristics and base dimensions of the machine cabinet.


The optional allow to obtain free-cooling by direct ambient air intake into the room.

The dampers are proportionally managed by the microprocessor control, that regulates the quantity of the ambient air to put in the room per the set-point.

COMPONENTS

- Frame in aluminium extrusion, painted with epoxy powders. Colour RAL 9005;
- Panels in galvanized steel sheet with protective surfaces treatment in compliance with UNI ISO 9227/ASTMB117 and ISO 7253, and painted with epoxy powders. Colour RAL 9005;
- Panels insulated with polyurethane foam and seals to ensure air tight.
- Removable panels with screws.
- Opposed blade dampers in galvanized steel sheet and safety grille for ambient air and room air suction.
- Actuator for each damper.
- Terminals for electric connection to the unit.
- Set of fixing elements to fasten the plenum to the unit.
- T/rH air intake sensor. The sensor must be moved outside the air conditioners for a proper read of the room temperature value.
- External air probe. The sensor must be installed in the outdoor air suction duct or anyway protected against atmospheric agent.
- Free contact for free-cooling operating status monitoring.
- Terminals on indoor unit for:
 - 24 Vac power supply for the overpressure damper servomotor
 - 0-10Vdc control signal for the servomotor

INSTALLATION EXAMPLE

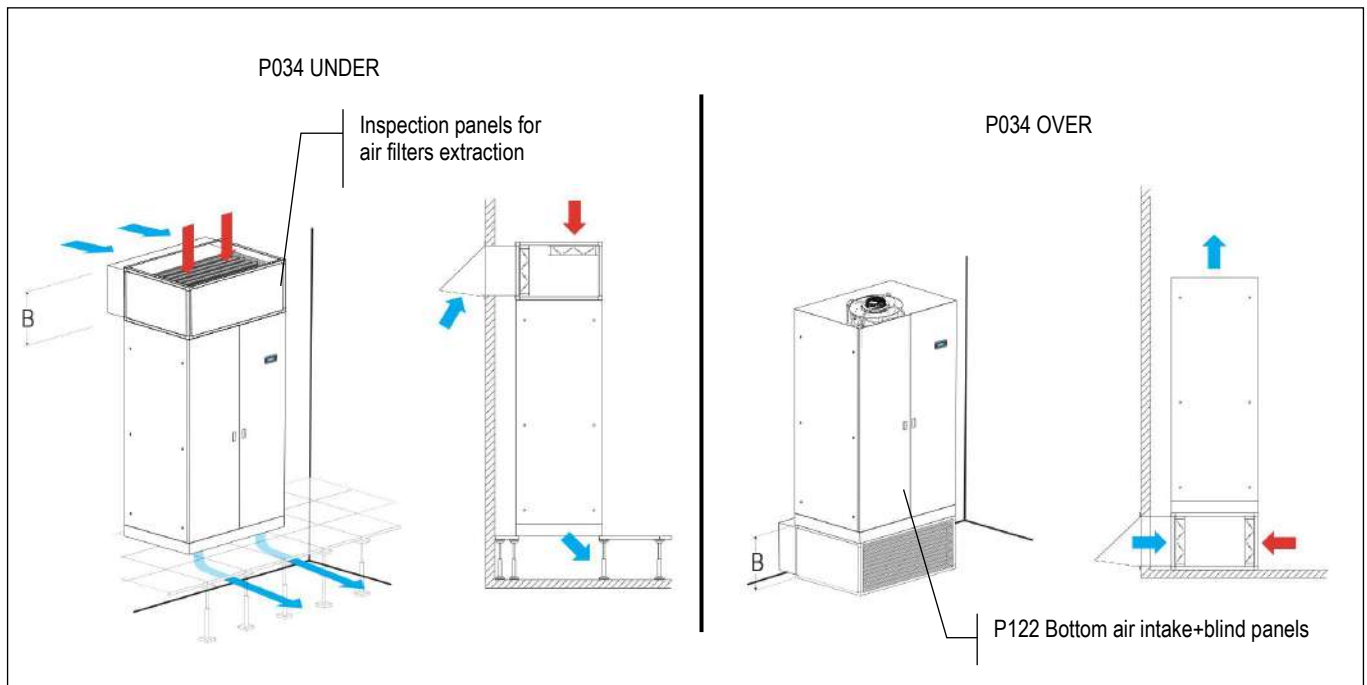


Ducting for ambient air suction are at Customer care.


A rain cover with grille on ambient air intake is recommended.

OVER VERSION


SIZE E1 / E2 / E3 / E3P

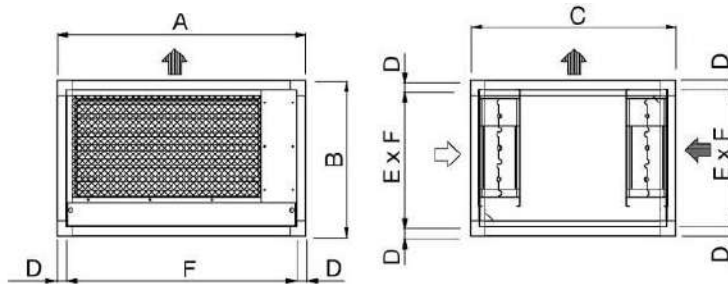

SIZE E4 / E5

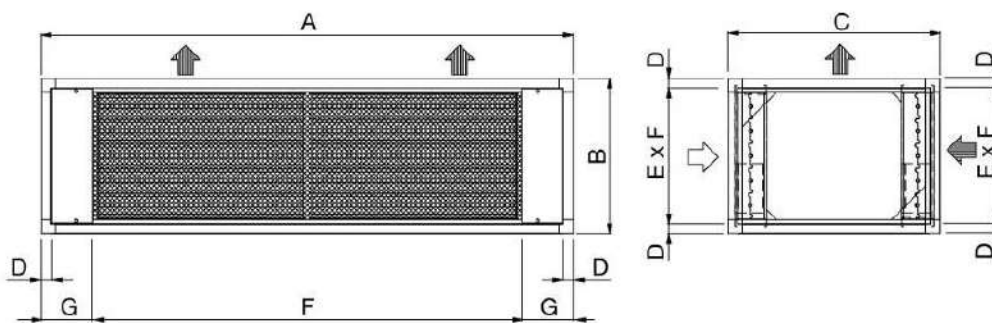

SIZE E6 / E7 / E8 / E9 / E10


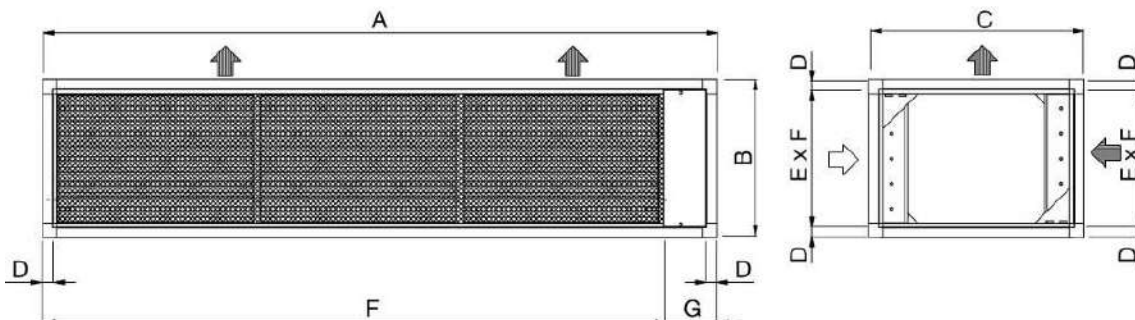


| VERSION (1) | | O | O | O | O | O | O | O | O | O | O | O |
|-------------|----|-----|-----|------|------|------|-------|------|------|------|------|-----|
| SIZE | | E1 | E2 | E3 | E3P | E4 | E5 | E6 | E7 | E8 | E9 | E10 |
| A | mm | 650 | 785 | 1085 | 1085 | 1305 | 1630 | 1873 | 2175 | 2499 | 2899 | -- |
| B | mm | 490 | 490 | 490 | 630 | 630 | 630 | 630 | 630 | 630 | 630 | -- |
| C | mm | 650 | 650 | 750 | 905 | 905 | 905 | 905 | 905 | 905 | 905 | -- |
| D | mm | 30 | 30 | 30 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | -- |
| E | mm | 430 | 430 | 430 | 550 | 550 | 550 | 550 | 550 | 550 | 550 | -- |
| F | mm | 590 | 725 | 1025 | 1005 | 1035 | 1335 | 1664 | 1965 | 2220 | 2670 | -- |
| G | mm | -- | -- | -- | -- | 135 | 147,5 | 209 | 210 | 279 | 229 | -- |
| Weight (2) | kg | 24 | 27 | 35 | 43 | 53 | 61 | 78 | 90 | 110 | 130 | -- |



1. U = Under, downflow / O = Over, upflow
2. Add this value to the total unit weight

UNDER VERSION



SIZE E1 / E2 / E3 / E3P



SIZE E4 / E5

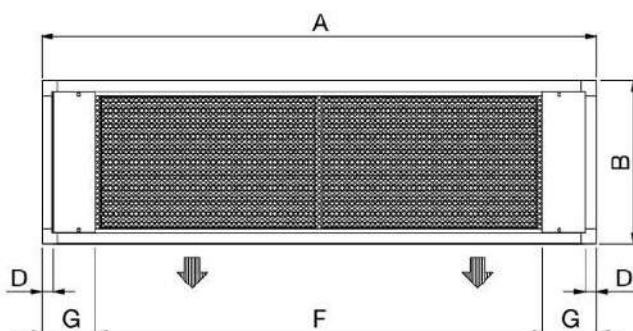

SIZE E6 / E7 / E8 / E9 / E10

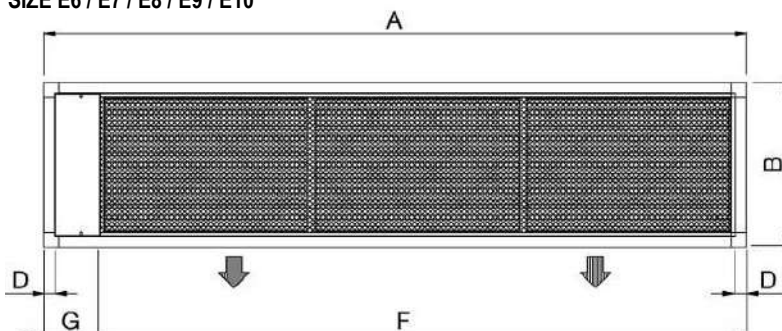

| VERSION (1) | | U | U | U | U | U | U | U | U | U | U | U |
|-------------|----|-----|-----|------|------|------|-------|------|------|------|------|------|
| SIZE | | E1 | E2 | E3 | E3P | E4 | E5 | E6 | E7 | E8 | E9 | E10 |
| A | mm | 650 | 785 | 1085 | 1085 | 1305 | 1630 | 1873 | 2175 | 2499 | 2899 | 3510 |
| B | mm | 490 | 490 | 490 | 630 | 630 | 630 | 630 | 630 | 630 | 630 | 630 |
| C | mm | 650 | 650 | 750 | 905 | 905 | 905 | 905 | 905 | 905 | 905 | 905 |
| D | mm | 30 | 30 | 30 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 |
| E | mm | 430 | 430 | 430 | 550 | 550 | 550 | 550 | 550 | 550 | 550 | 550 |
| F | mm | 590 | 725 | 1025 | 1005 | 1035 | 1335 | 1664 | 1965 | 2220 | 2670 | 3135 |
| G | mm | -- | -- | -- | -- | 135 | 147,5 | 209 | 210 | 279 | 229 | 375 |
| H | mm | -- | -- | -- | 275 | 275 | 275 | 275 | 275 | 275 | 275 | 275 |
| Weight (2) | kg | 24 | 27 | 35 | 43 | 53 | 61 | 78 | 90 | 110 | 130 | 155 |

1. U = Under, downflow / O = Over, upflow
2. Add this value to the total unit weight

WARNING

IT IS COMPULSORY TO INSTALL INTO THE ROOM AN APPROPRIATELY SIZED OVERPRESSURE DAMPER TO ALLOW THE ROOM AIR EXHAUSTION DURING FREE-COOLING WORKING MODE


OVERPRESSURE DAMPER – Not supplied

During free-cooling operation, the air conditioner supplies ambient air directly into the room, this causes an increase in air pressure inside the room.

The overpressure damper avoids the increase in pressure in the room.

The damper must be installed at the highest point of the room to expel excess hot air to the outside. Install the damper if possible in opposite position to air conditioner.


Air exhaustion must be protected with a rain cover and a grille (at Customer care).

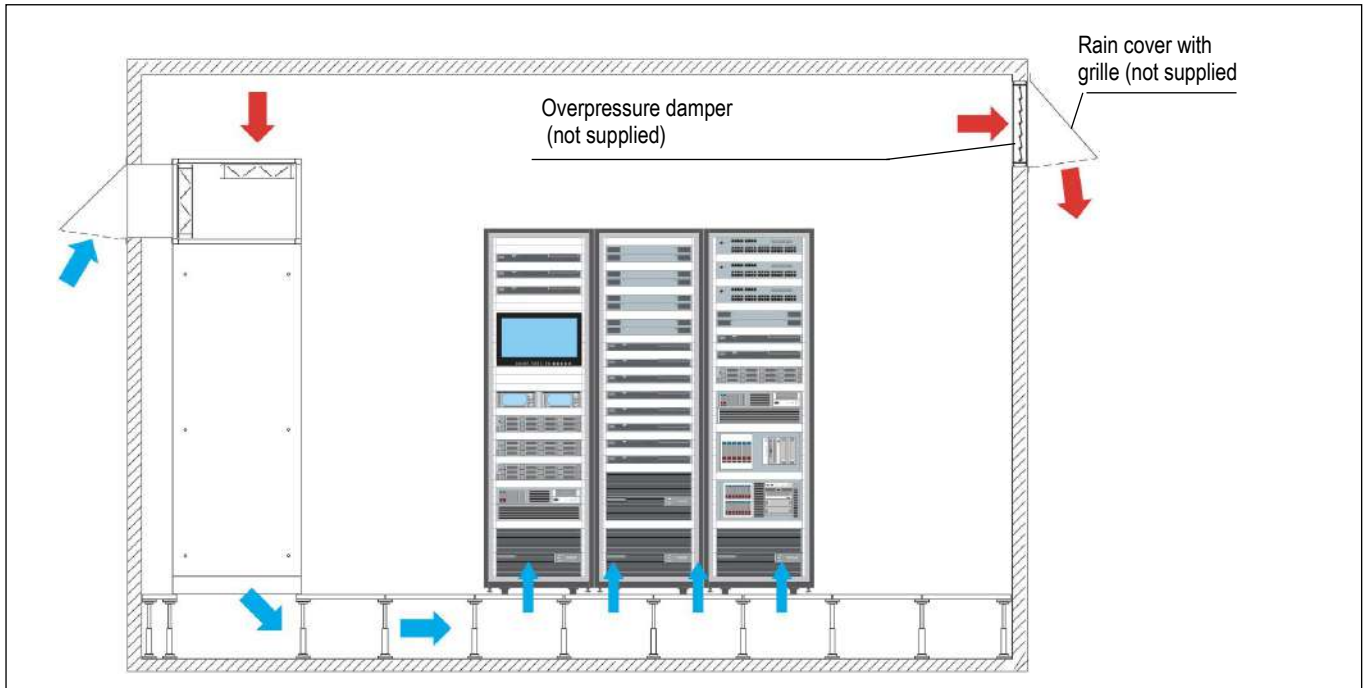





OPTIONAL ACCESSORIES: P041 – SUPPORT FRAME H 255-350MM

OPTIONAL ACCESSORIES: P042 – SUPPORT FRAME H 355-450MM

OPTIONAL ACCESSORIES: P043 – SUPPORT FRAME H 400-510MM

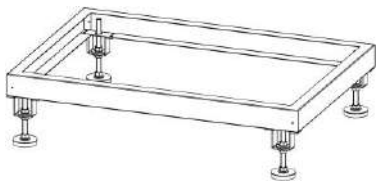

The accessory is supplied as an assembly kit.
It is not possible to match the unit floor stand with plenum installed under the machine.
The floor stand is available in 3 different heights.

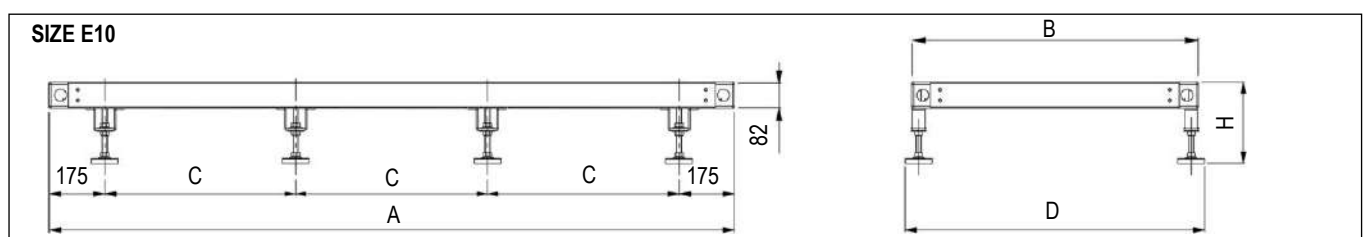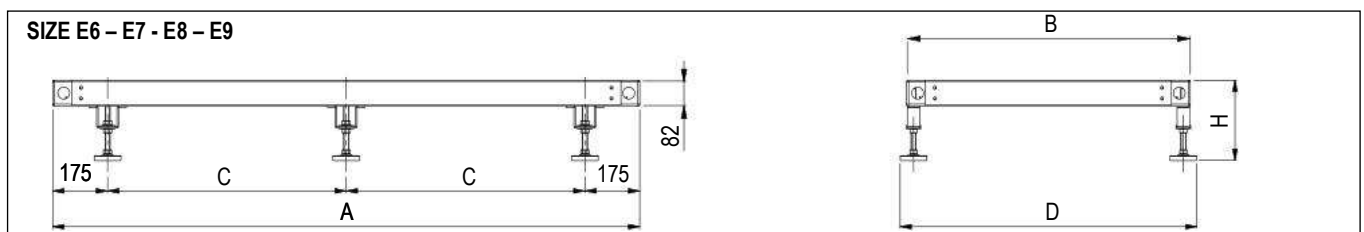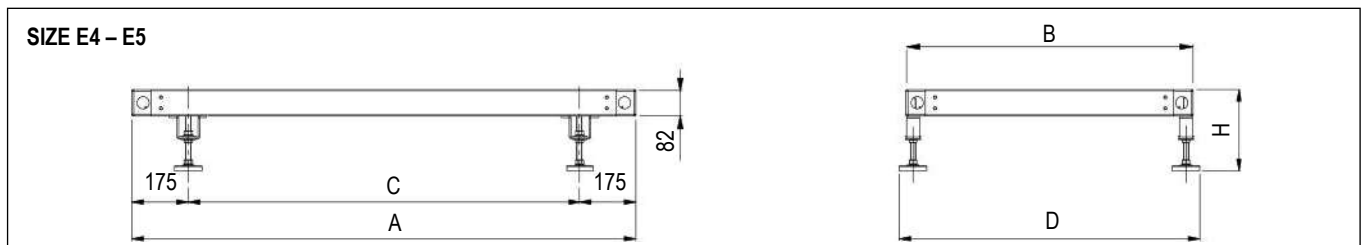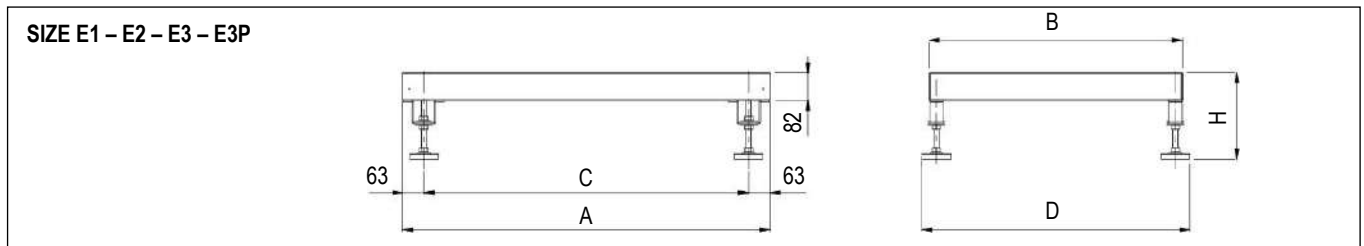

| SIZE | | E1 | E2 | E3 | E3P | E4 | E5 | E6 | E7 | E8 | E9 | E10 |
|------|----|-----|-----|------|------|------|------|-------|-------|--------|--------|------|
| A | mm | 650 | 785 | 1085 | 1085 | 1305 | 1630 | 1873 | 2175 | 2499 | 2899 | 3510 |
| B | mm | 650 | 650 | 750 | 905 | 905 | 905 | 905 | 905 | 905 | 905 | 905 |
| C | mm | 524 | 659 | 959 | 959 | 955 | 1280 | 761,5 | 912,5 | 1074,5 | 1274,5 | 1053 |
| D | mm | 691 | 691 | 791 | 946 | 945 | 945 | 945 | 945 | 945 | 945 | 945 |

| MODEL | | P041 - Hmax350 | P042 - Hmax450 | P043 - Hmax510 |
|--------------|----|----------------|----------------|----------------|
| H min height | mm | 255 | 355 | 400 |
| H max height | mm | 350 | 450 | 510 |

OPTIONAL ACCESSORIES: A272 – CL.0 or A1 (EN13501-1) INSULATION

The optional is designed **TO SUPPLY THE PANELING ONLY WITH FIRE REACTION IN CLASS “0” OR “A1 (EN 13501-1)”**; furthermore allows a noise insulation of the panels of the air conditioners.

The pressure level reduction of the unit is about 2 dB(A). The reduction refers **ONLY** to the sound level radiated from the unit or in front of the unit. The noise level data on return and delivery air do not undergo reductions.

The accessory includes:

- External part as standard panel.
- Internal part in galvanized steel sheet.
- The inside noise insulation with special soundproof material.

REACTION TO FIRE CLASSIFICATION

On Italian territory, the classification is per the D.M. of June 26, 1984 and subsequent amendments, providing for a sort in "Classes" from 0 (non-combustible material) to 5 (extremely flammable material). The EN 13501-1 regulation is ordered in classes from A1 (non-combustible material) to F (extremely flammable material).

A comparison of the classes is not possible because the methods and evaluation criteria are completely different. The comparison table below is being considered purely indicative.

| Definition | Italian classes | EN 13501-1 |
|---|-----------------|------------|
| Non-combustible material | Class 0 | A1 |
| Combustible material, very limited contribution to fire | Class 1 | A2 – B |
| Combustible material, limited contribution to fire | Class 2 | A2 – B - C |
| Combustible material, medium contribution to fire | Class 3 | C – D |
| Combustible material, highly contribution to fire | Class 4 | E |
| Combustible material, easily flammable | Class 5 | F |

Is possible to provide the sandwich panels for the OVER units with air flow from the top. This implies that the air intake must necessarily be from the base of the unit with front blind paneling.

The accessory increases the unit weight:

| OVER | | | | | | | | | | | | |
|-----------------------|----|----|----|----|-----|----|----|----|-----|-----|-----|-----|
| Size | | E1 | E2 | E3 | E3P | E4 | E5 | E6 | E7 | E8 | E9 | E10 |
| Weight increasing (1) | kg | 26 | 42 | 48 | 58 | 64 | 72 | 86 | 100 | 115 | 130 | -- |

| UNDER | | | | | | | | | | | | |
|-----------------------|----|----|----|----|-----|----|----|-----|-----|-----|-----|-----|
| Size | | E1 | E2 | E3 | E3P | E4 | E5 | E6 | E7 | E8 | E9 | E10 |
| Weight increasing (1) | kg | 30 | 48 | 55 | 65 | 70 | 86 | 110 | 130 | 145 | 165 | 195 |


1. Add this value to the total unit weight


OPTIONAL ACCESSORIES: P151 – LOWERED DISPLAY FOR UNDER

For machines installed above the supply plenum. The display / keypad on the front panel of the machine is installed lowered by about 50cm to facilitate consultation and use.




MACHINE DRAWINGS
Dimensions in mm - UNDER E1

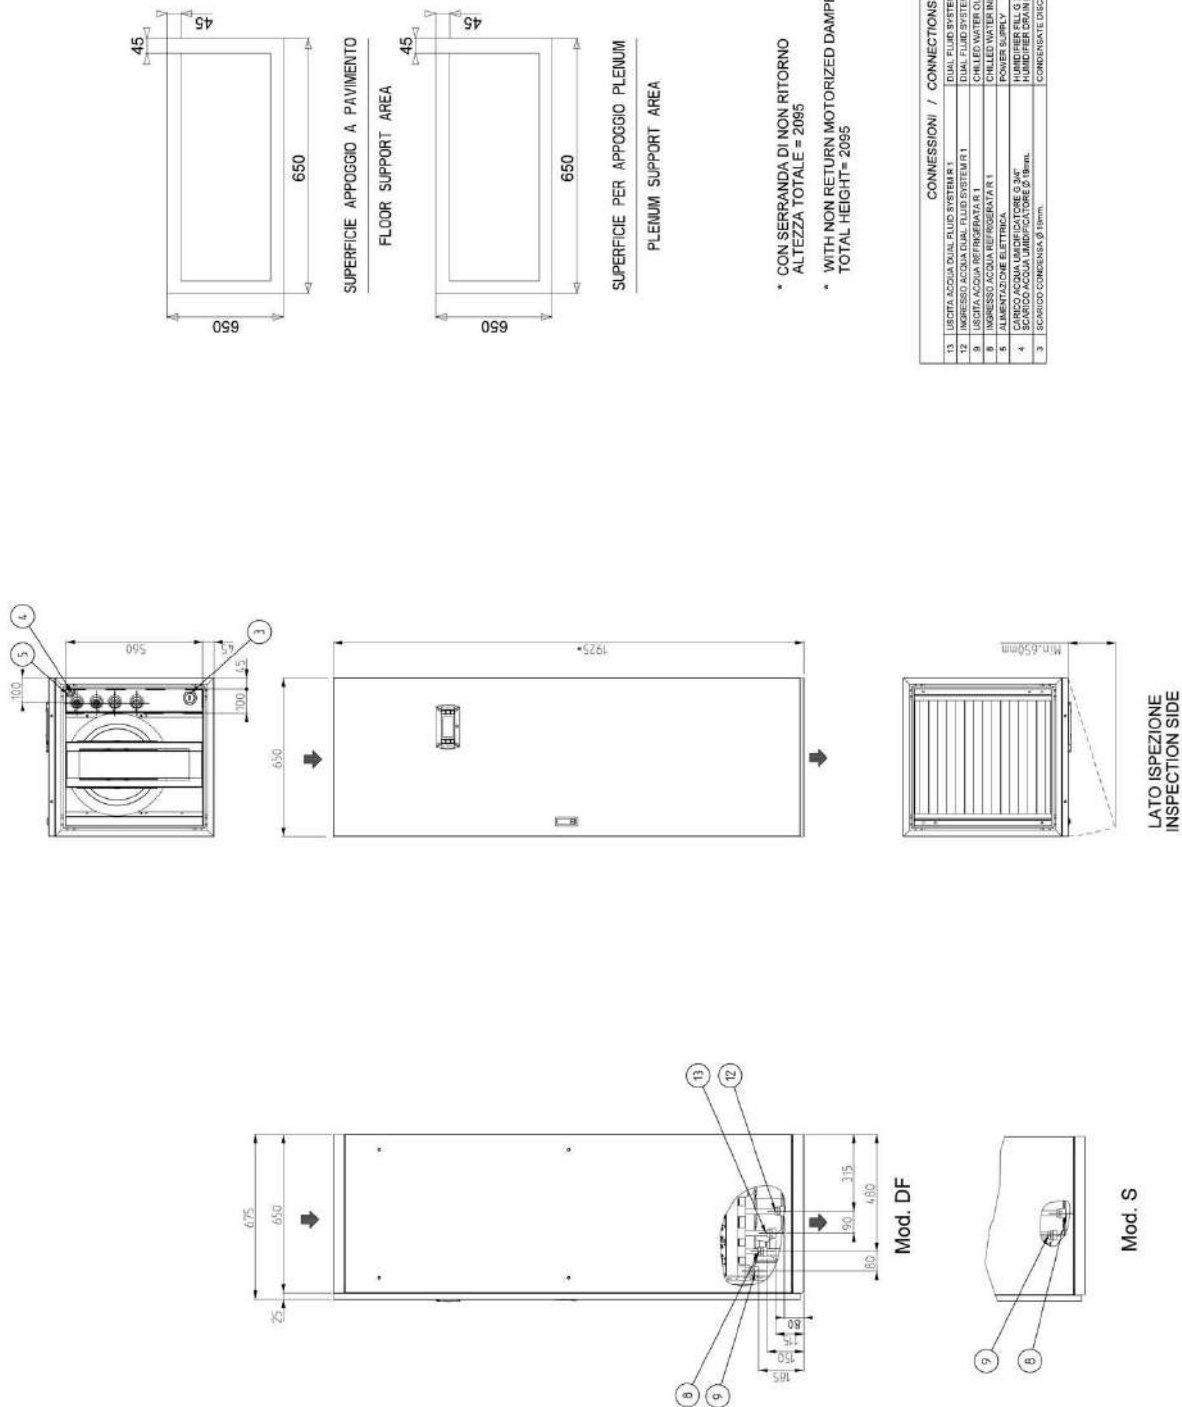







SUPERFICIE APOGGIO A PAVIMENTO
FLOOR SUPPORT AREA




SUPERFICIE PER APOGGIO PLENUM
PLENUM SUPPORT AREA

- * CON SERRANDA DI NON RITORNO
ALTEZZA TOTALE = 2095
- * WITH NON RETURN MOTORIZED DAMPER
TOTAL HEIGHT= 2095


| CONNESSIONI / CONNECTIONS | |
|---------------------------|------------------------------------|
| 13 | USCITA ACQUA DUAL FLUID SYSTEM 1 |
| 12 | INGRESSO ACQUA DUAL FLUID SYSTEM 1 |
| 9 | USCITA ACQUA REFRIGERATA R 1 |
| 8 | INGRESSO ACQUA REFRIGERATA R 1 |
| 5 | ALIMENTAZIONE ELETTRICA |
| 4 | SCARICO ACQUA ALUMINIFICATORE 15mm |
| 3 | SCARICO CONDENSATO 15mm |

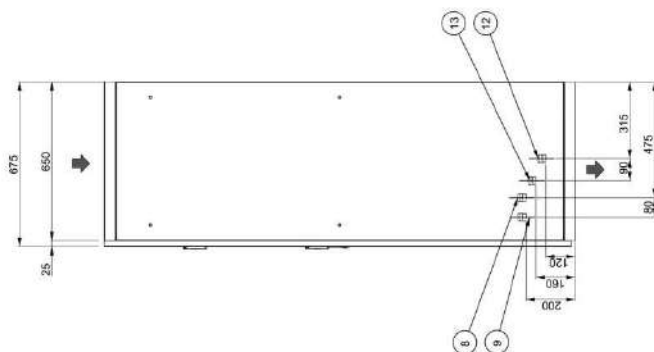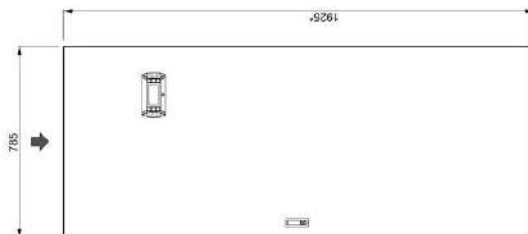


Mod. DF



Mod. S



SUPERFICIE APOGGIO A PAVIMENTO
FLOOR SUPPORT AREA






SUPERFICIE PER APOGGIO PLENUM
PLENUM SUPPORT AREA


* CON SERRANDA DI NON RITORNO
ALTEZZA TOTALE = 2095

* WITH NON RETURN MOTORIZED DAMPER
TOTAL HEIGHT= 2095


| CONNESSIONI / CONNECTIONS | |
|---------------------------|--|
| 13 | USCITA ACQUA DUAL FLUID SYSTEM R 1/4 |
| 12 | DUAL FLUID SYSTEM OUTLET R 1/4 |
| 11 | INGRESSO ACQUA DUAL FLUID SYSTEM R 1/4 |
| 10 | DUAL FLUID SYSTEM INLET R 1/4 |
| 9 | USCITA ACQUA REFRIGERANTE R 1/4 |
| 8 | CHILLED WATER OUTLET R 1/4 |
| 7 | INGRESSO ACQUA REFRIGERANTE R 1/4 |
| 6 | CHILLED WATER INLET R 1/4 |
| 5 | ALIMENTAZIONE ELETTRICA |
| 4 | POWER SUPPLY |
| 3 | CARICO ACQUA UMIDIFICATORE G.3MP |
| 2 | HUMIDIFIER FILL G.3MP |
| 1 | SCARICO ACQUA UMIDIFICATORE Ø 18mm |
| 0 | HUMIDIFIER DRAIN Ø 18mm |
| 3 | SCARICO CONDENSATE Ø 18mm |
| 0 | CONDENSATE DISCHARGE Ø 18mm |

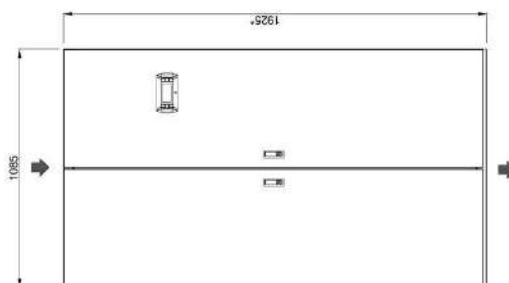


LATO ISPEZIONE
INSPECTION SIDE

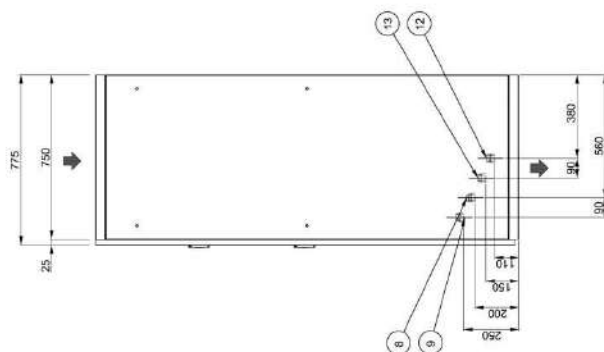


Mod. DF



Mod. S


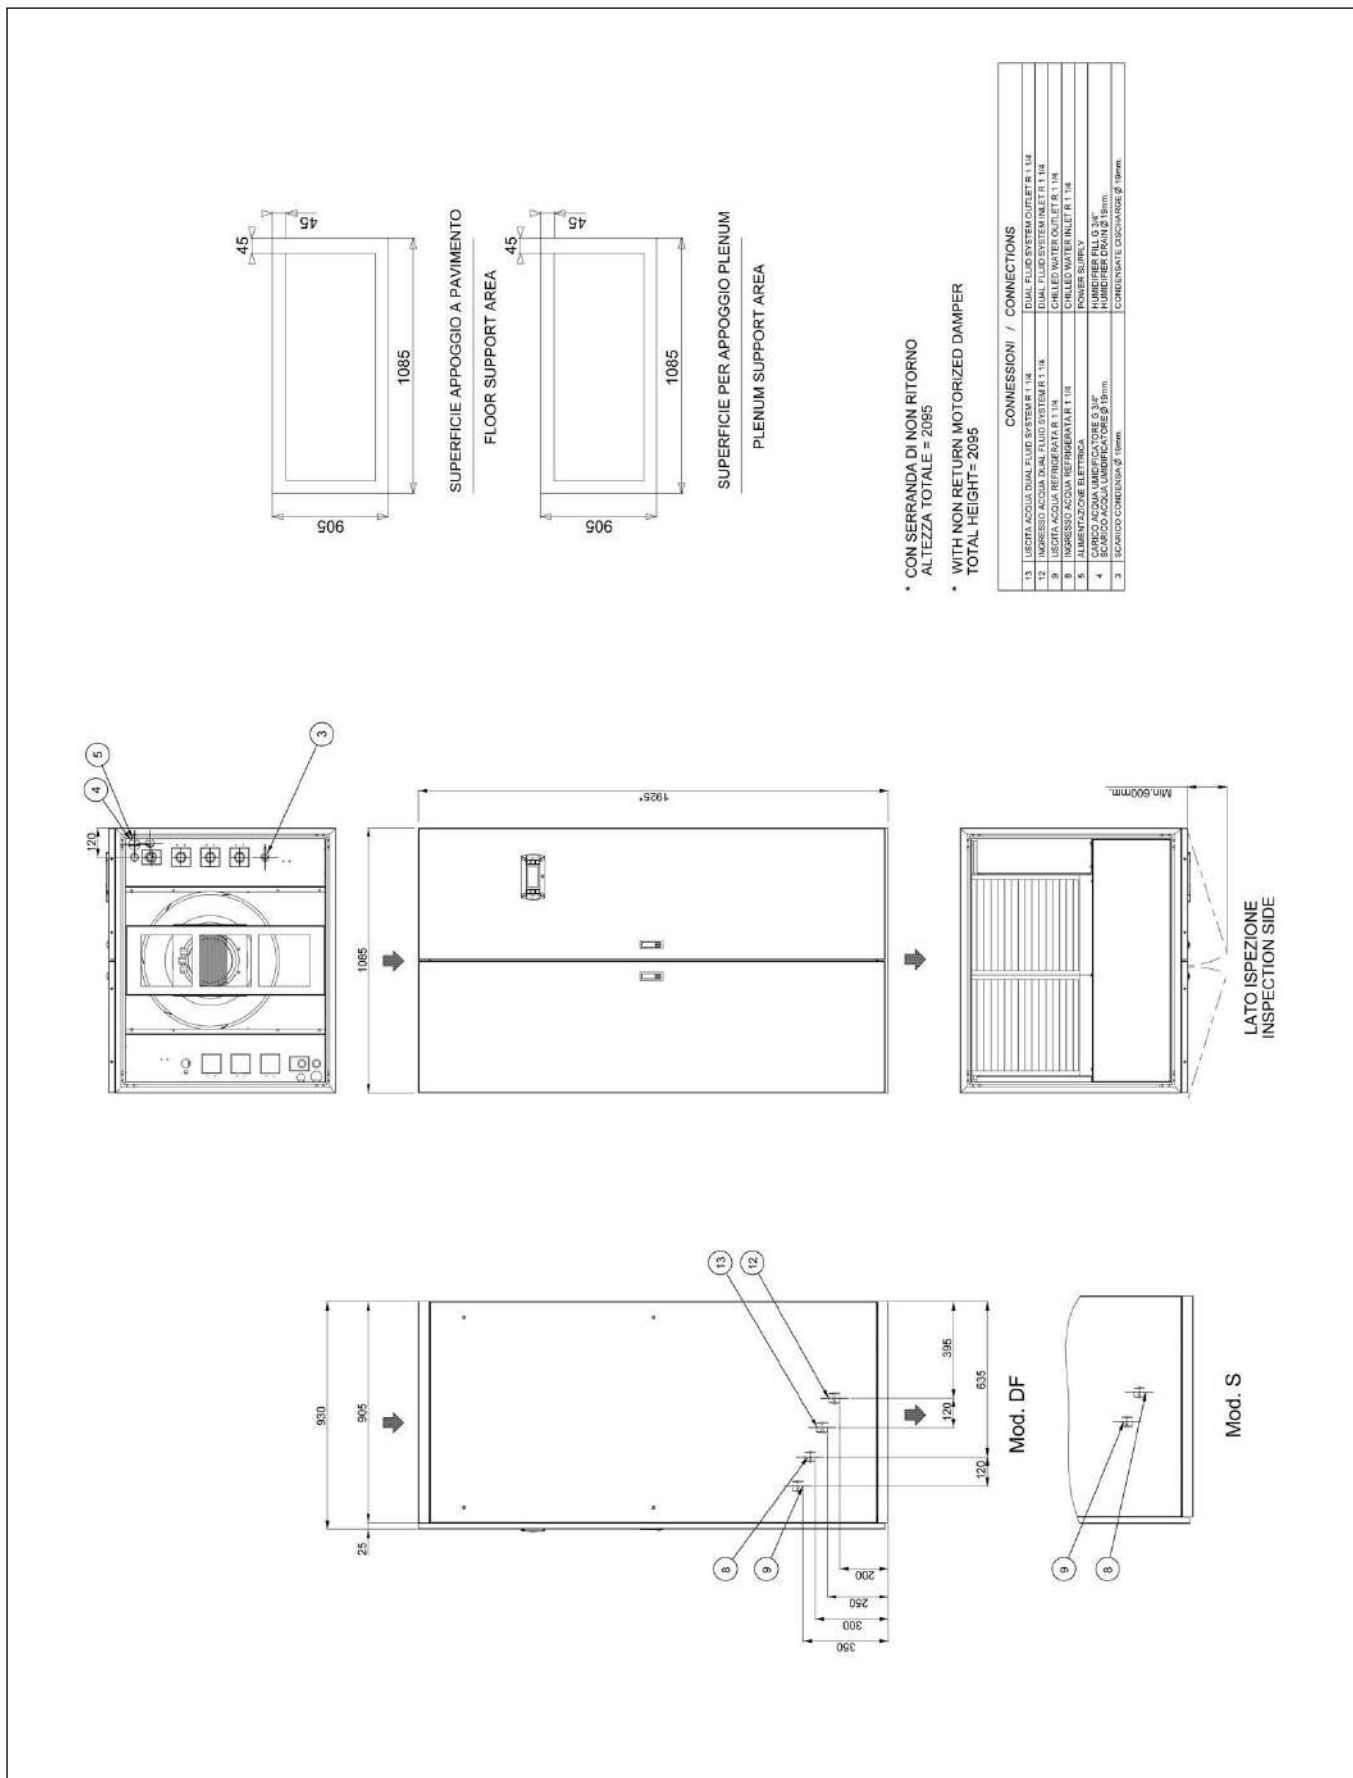


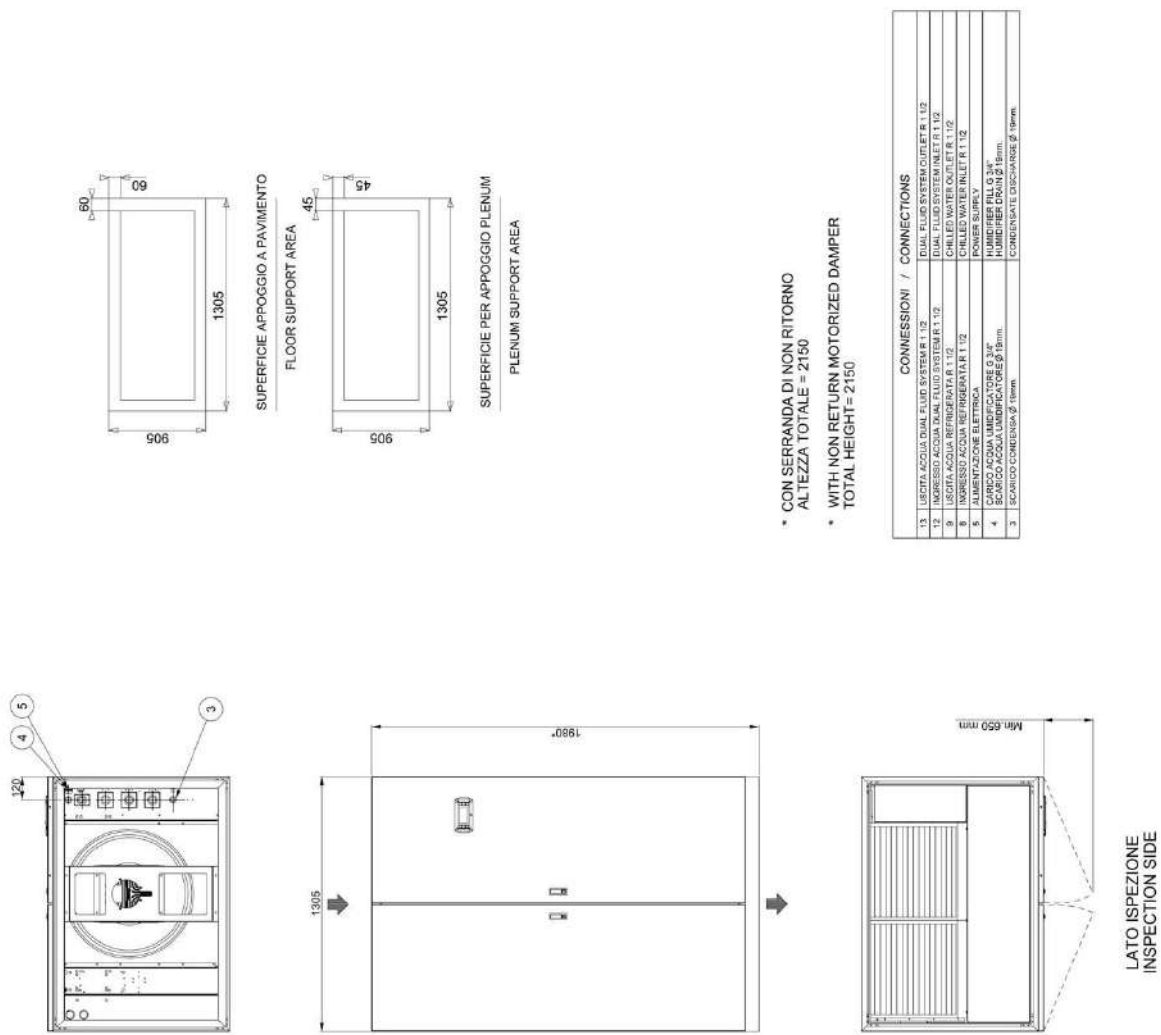

* CON SERRANDA DI NON RITORNO
ALTEZZA TOTALE = 2150


* WITH NON RETURN MOTORIZED DAMPER
TOTAL HEIGHT= 2150


| CONNESSIONI / CONNECTIONS | |
|---------------------------|--|
| 12 | USCITA ACQUA DALLA LINEA SFRIDATA R.T. 1/2" / TOTAL FLUID SYSTEM OUTLET R.T. 1/2" |
| 13 | IMPIEDIMENTO ALL'INLET DEL FLUIDO SFRIDATO R.T. 1/2" / CHILLED WATER INLET R.T. 1/2" |
| 8 | USCITA ACQUA REFRIGERANTE R.T. 1/2" / CHILLED WATER OUTLET R.T. 1/2" |
| 9 | IMPIEDIMENTO ALL'INLET DELL'ACQUA REFRIGERANTE R.T. 1/2" / CHILLED WATER INLET R.T. 1/2" |
| 5 | ALIMENTAZIONE ELETTRICA / POWER SUPPLY |
| 4 | SCARICO ACQUA CONDENSATA R.T. 1/2" / HUMID REFRIGERANT DISCHARGE R.T. 1/2" |
| 3 | SCARICO CONDENSATA Ø 19mm / CONDENSATE DISCHARGE Ø 19mm |

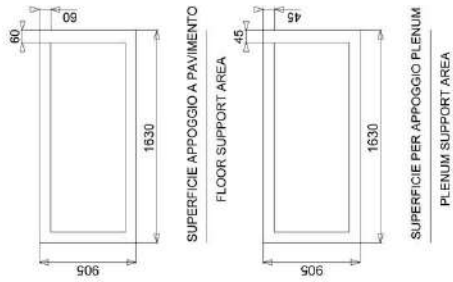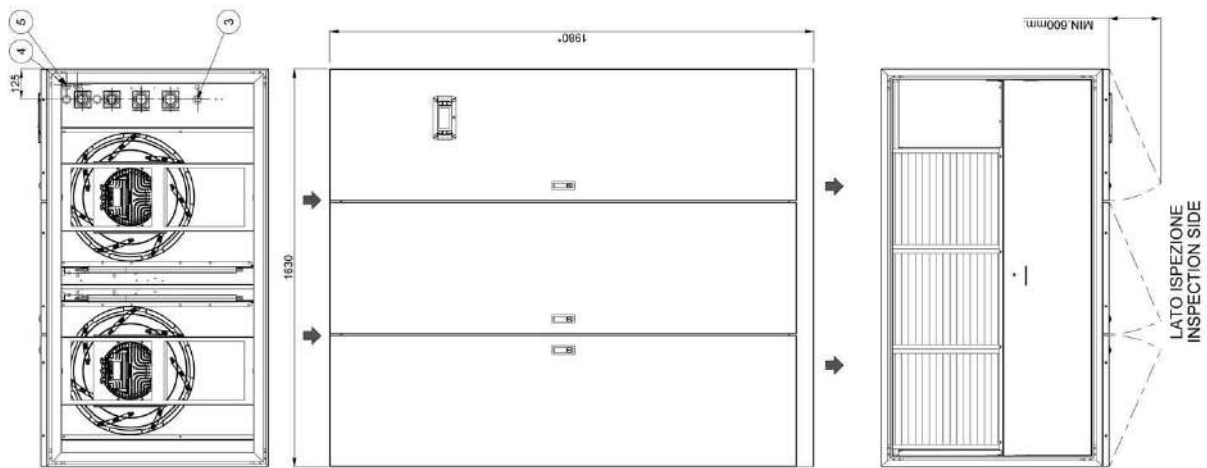


- CON SERRANDA DI NON RITORNO
ALTEZZA TOTALE = 2150
- WITH NON RETURN MOTORIZED DAMPER
TOTAL HEIGHT= 2150

| CONNESSIONI / CONNECTIONS | |
|---------------------------|--|
| 13 | USCITA ACQUA DUAL FLUID SYSTEM R 2 / DUAL FLUID SYSTEM OUTLET R 2 |
| 12 | INGRESSO ACQUA DUAL FLUID SYSTEM R 2 / DUAL FLUID SYSTEM INLET R 2 |
| 9 | USCITA ACQUA REFRIGERATA R 2 / CHILLED WATER OUTLET R 2 |
| 8 | INGRESSO ACQUA REFRIGERATA R 2 / CHILLED WATER INLET R 2 |
| 5 | ALIMENTAZIONE ELETTRICA / POWER SUPPLY |
| 4 | SCARICO ACQUA LUBRIFICATORE G 3/8" / HUMIDIFIER DRAIN G 3/8" |
| 3 | SCARICO CONDENSATO G 1/2" / CONDENSATE DRAIN G 1/2" |

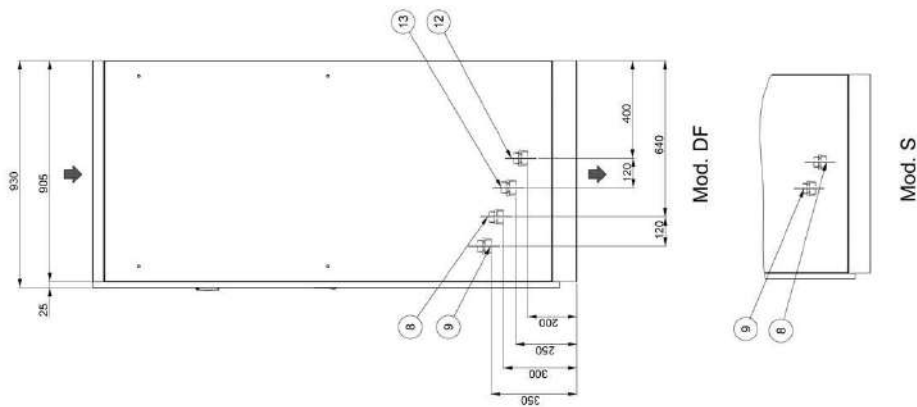

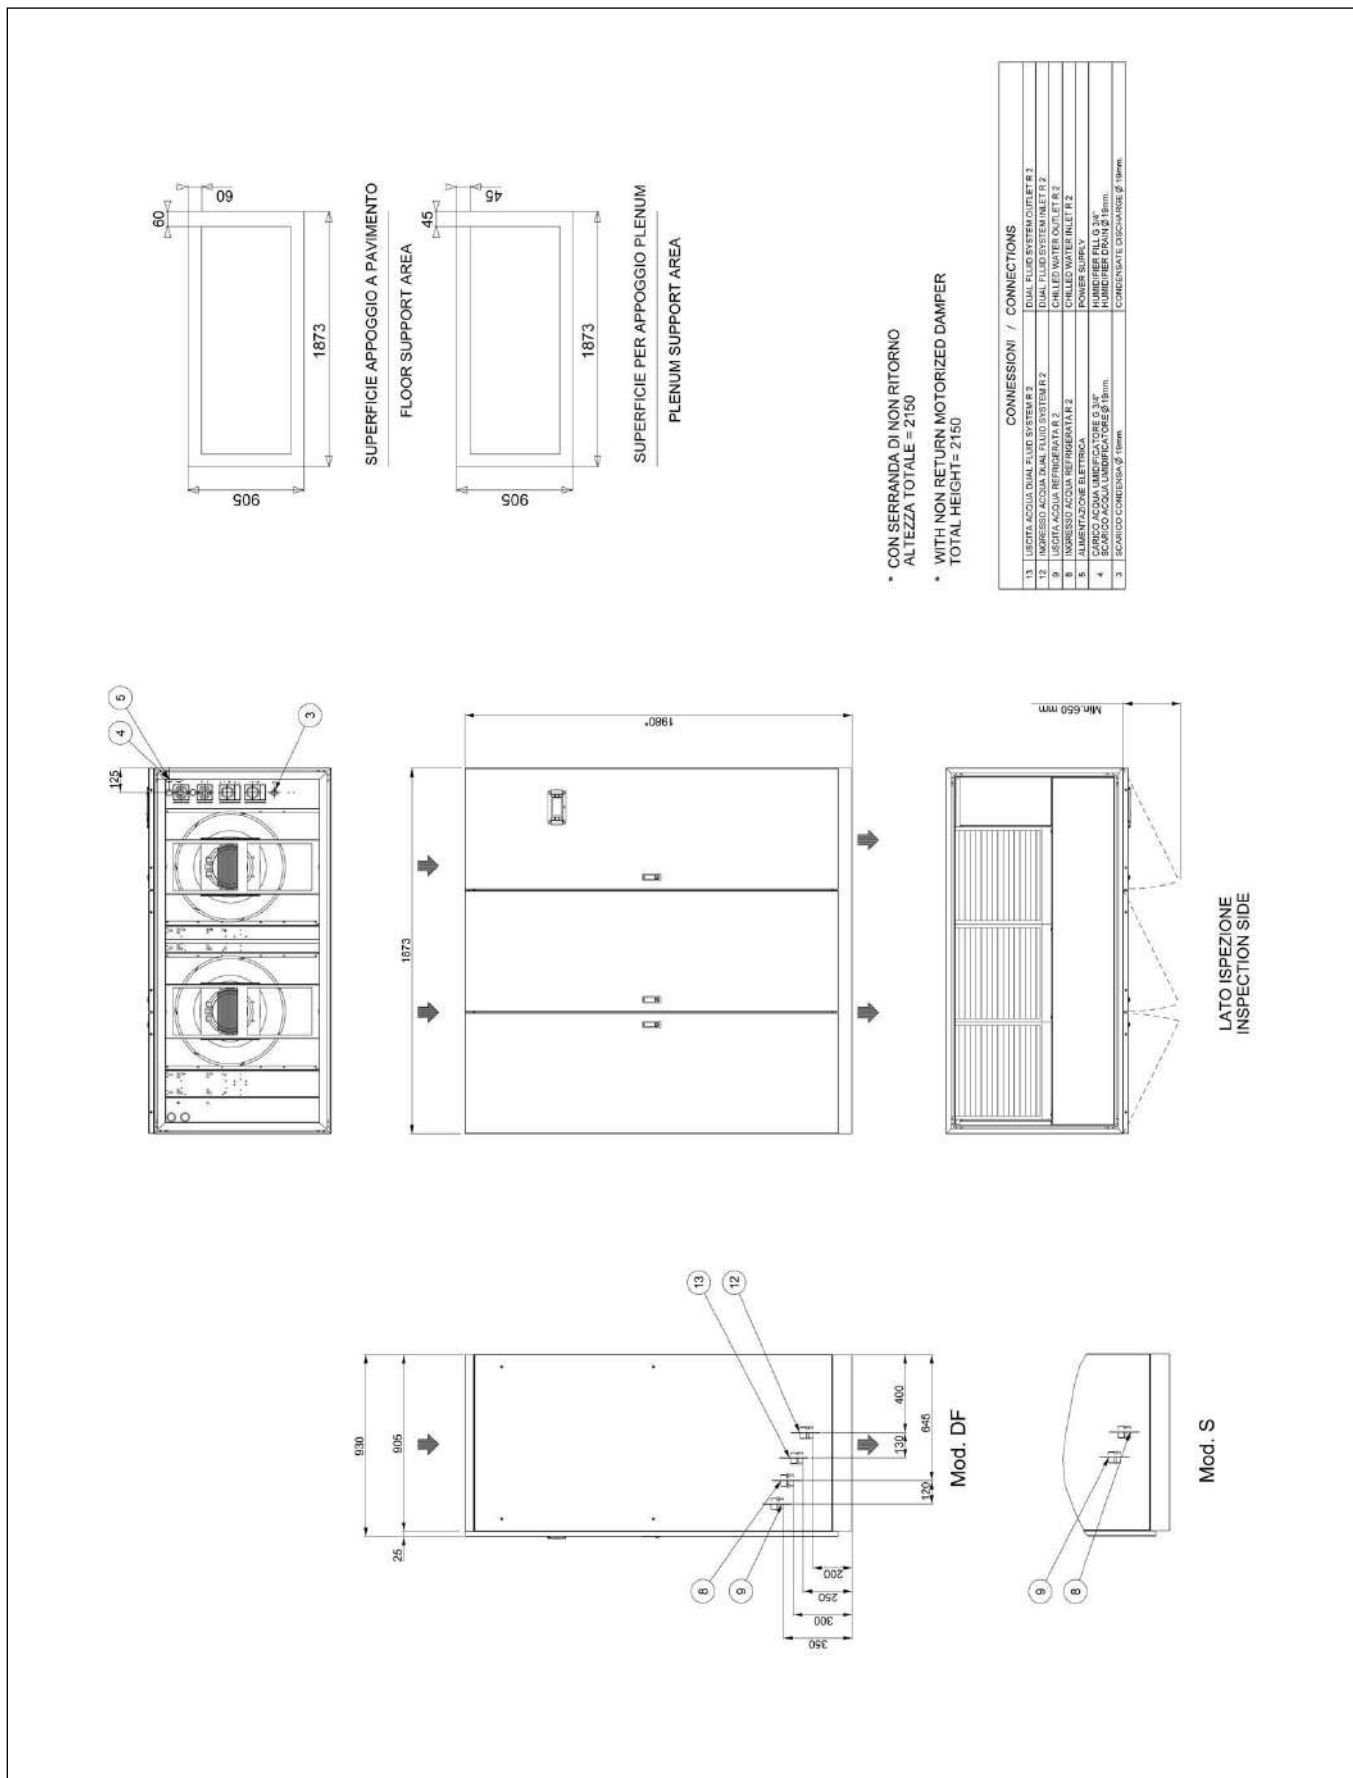


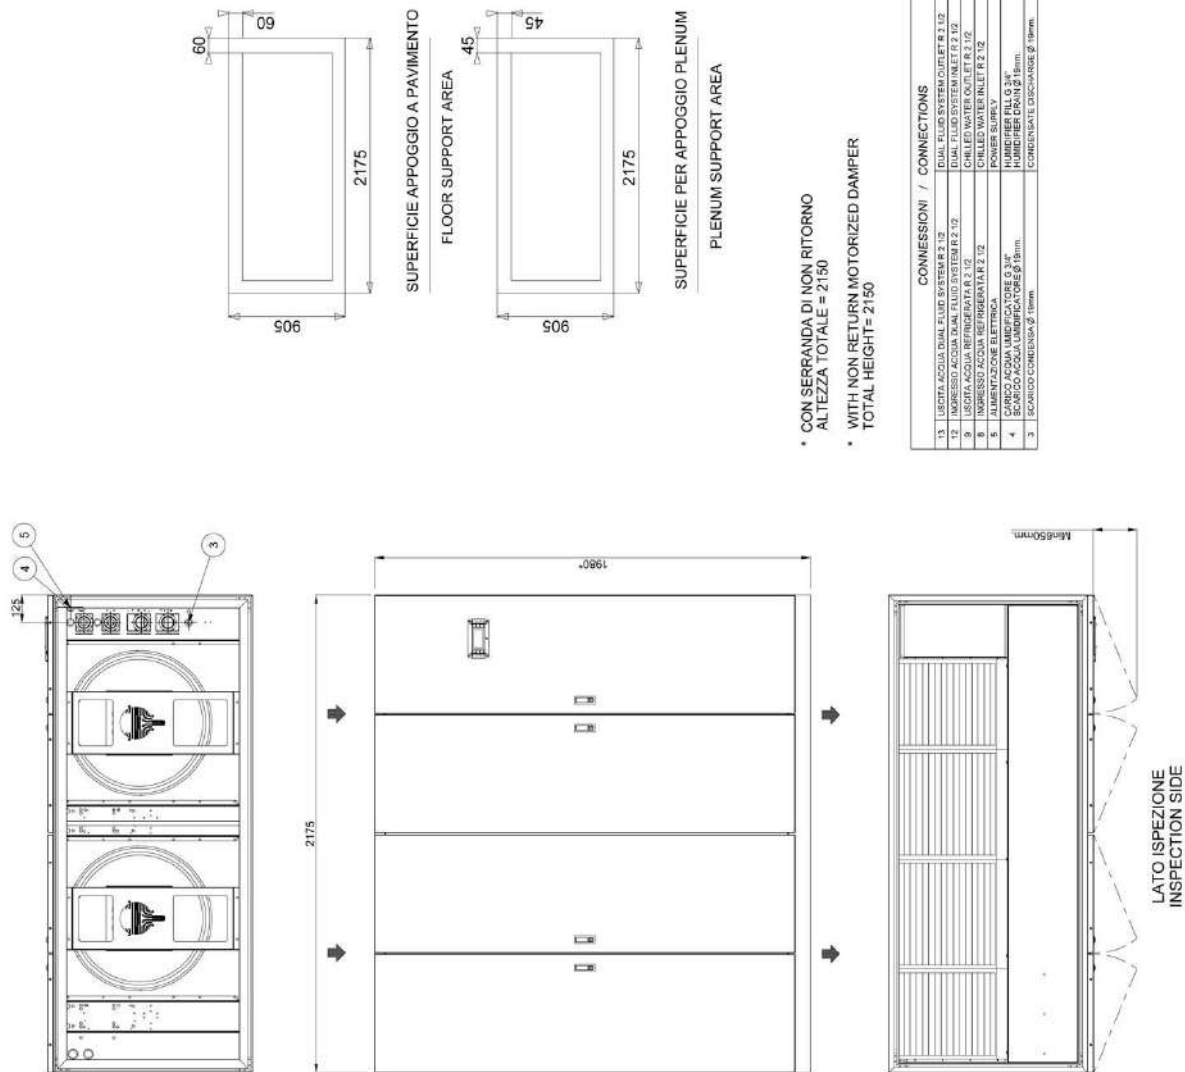



* CON SERRANDA DI NON RITORNO
ALTEZZA TOTALE = 2150

* WITH NON RETURN MOTORIZED DAMPER
TOTAL HEIGHT= 2150


| CONNESSIONI / CONNECTIONS | |
|---------------------------|--|
| 13 | USCITA ACQUA DUAL FLUID SYSTEM R 2 1/2 |
| 12 | DUAL FLUID SYSTEM INLET R 2 1/2 |
| 9 | INGRESSO ACQUA DUAL FLUID SYSTEM R 2 1/2 |
| 8 | USCITA ACQUA REFRIGERATA R 2 1/2 |
| 5 | INGRESSO ACQUA REFRIGERATA R 2 1/2 |
| 4 | ALIMENTAZIONE ELETTRICA |
| 3 | SCARICO ACQUA CONDENSATA Ø 19mm |
| 2 | SCARICO ACQUA CONDENSATA Ø 19mm |
| 1 | CONDENSATE DISCHARGE Ø 19mm |

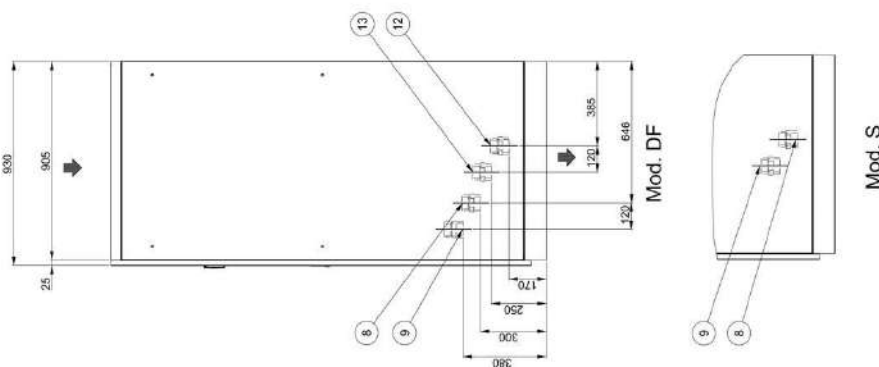

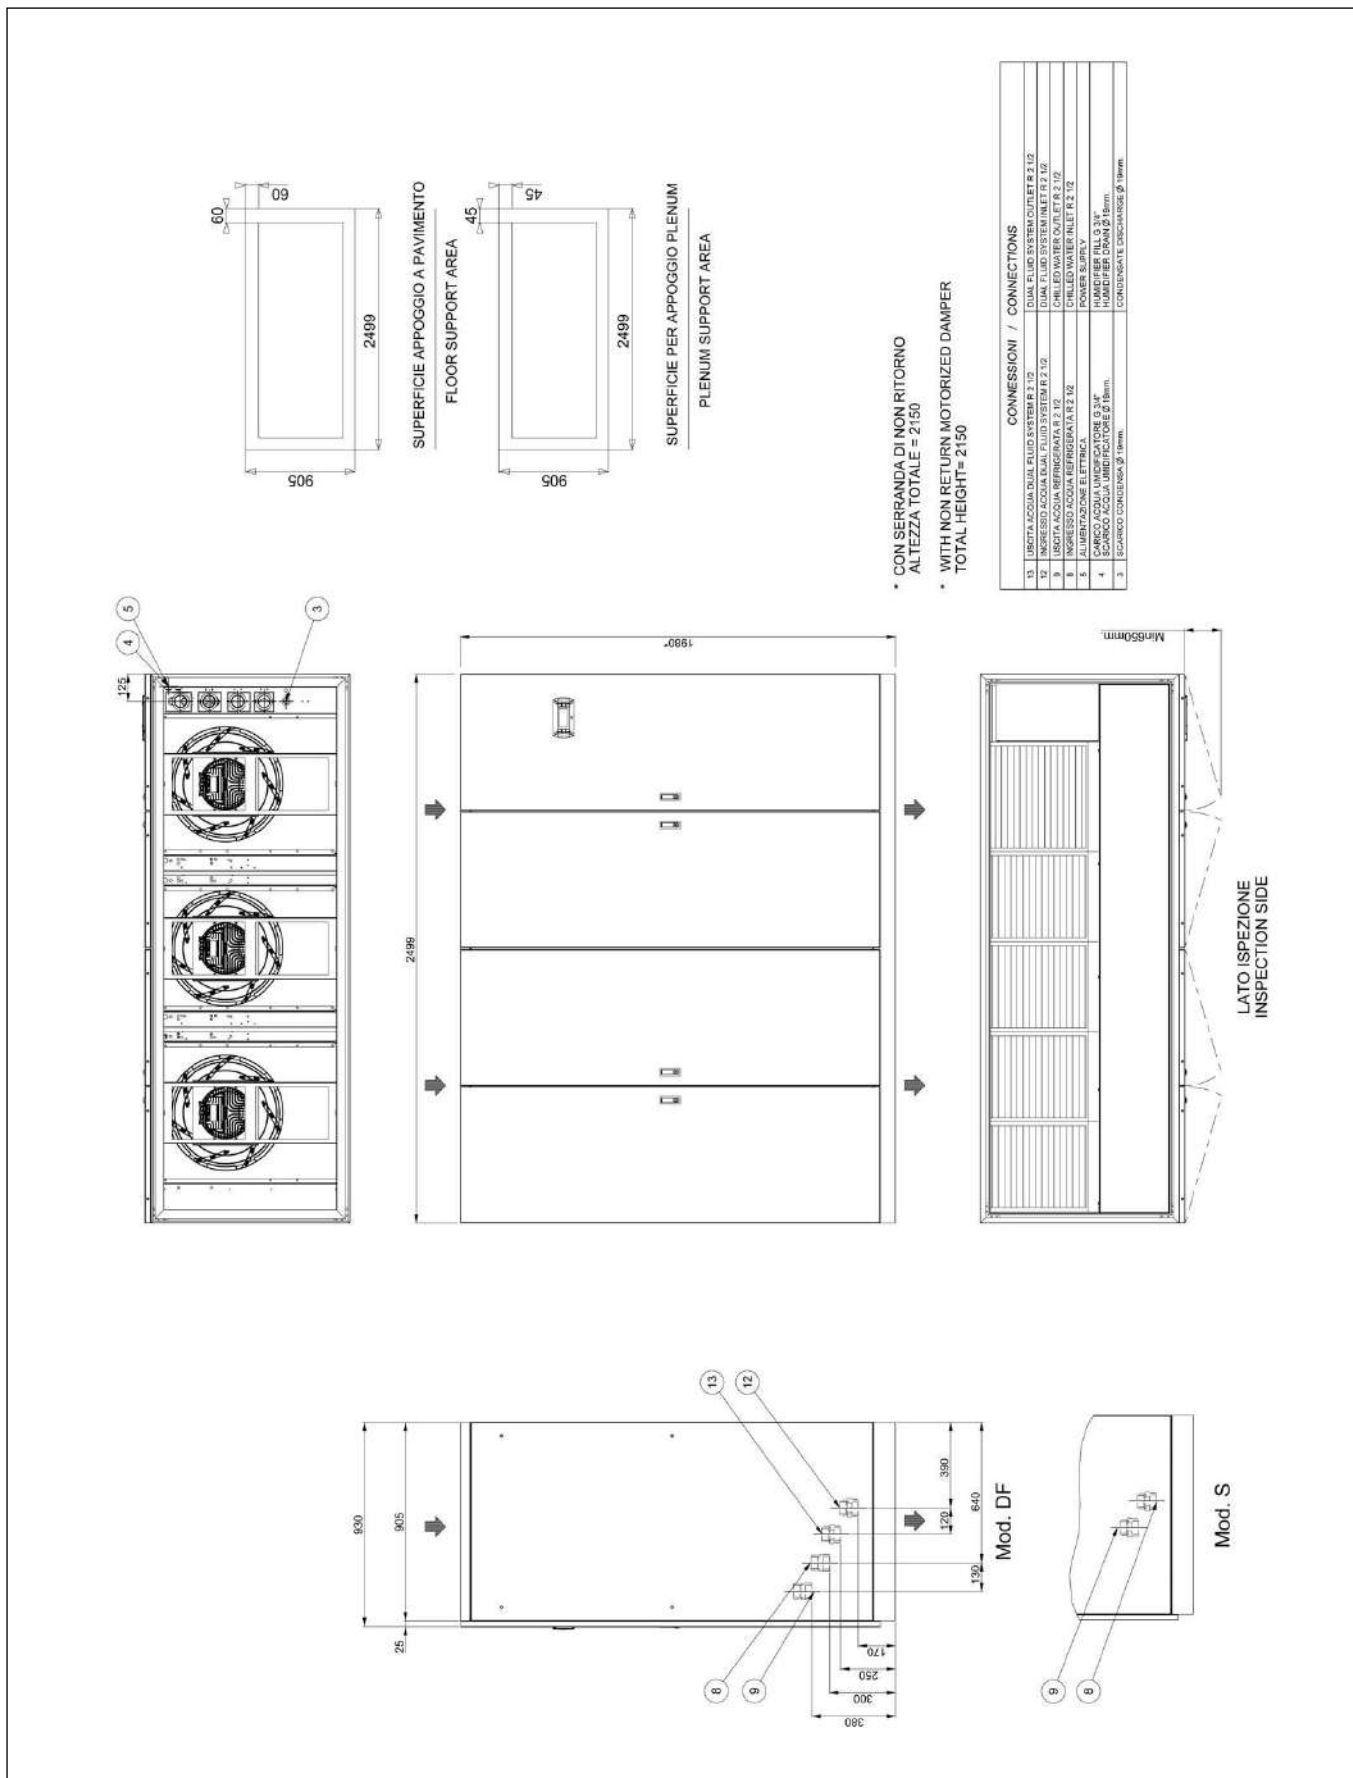



SUPERFICIE APPOGGIO A PAVIMENTO
FLOOR SUPPORT AREA






SUPERFICIE PER APPOGGIO PLENUM
PLENUM SUPPORT AREA


* CON SERRANDA DI NON RITORNO
ALTEZZA TOTALE = 2150

* WITH NON RETURN MOTORIZED DAMPER
TOTAL HEIGHT = 2150


| CONNESSIONI / CONNECTIONS | |
|---------------------------|--|
| 13 | USCITA ACQUA DUAL FLUID SYSTEM R 3 / DUAL FLUID SYSTEM OUTLET R 3 |
| 12 | INGRESSO ACQUA DUAL FLUID SYSTEM R 3 / DUAL FLUID SYSTEM INLET R 3 |
| 9 | USCITA ACQUA REFRIGERANTE R 3 / CHILLED WATER OUTLET R 3 |
| 8 | INGRESSO ACQUA REFRIGERANTE R 3 / CHILLED WATER INLET R 3 |
| 5 | INGRESSO ACQUA REFRIGERANTE R 3 / CHILLED WATER INLET R 3 |
| 4 | SCARICO ACQUA LAMBIFFICATORE 3/4" / HUMIDIFIER DRAIN 3/4" |
| 3 | SCARICO ACQUA LAMBIFFICATORE 1/2" / HUMIDIFIER DRAIN 1/2" |
| 3 | SCARICO CONDENSATO 1/2" / CONDENSATE DRAIN 1/2" |

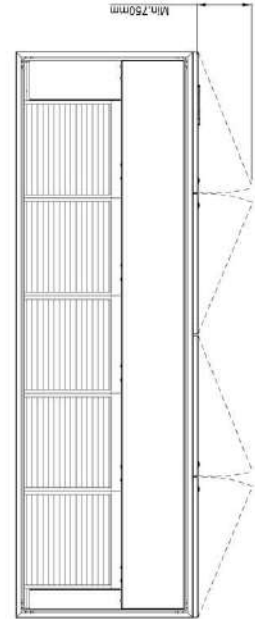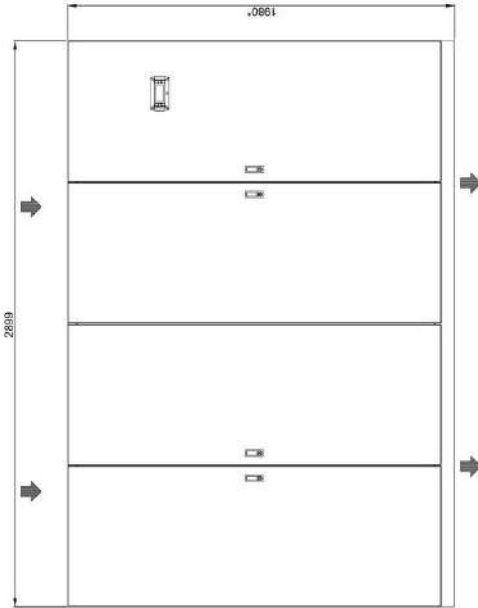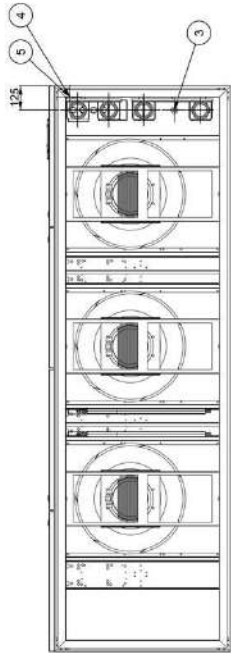


LATO ISPEZIONE
INSPECTION SIDE

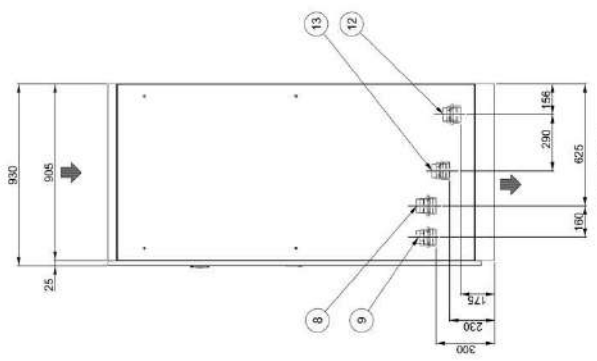


Mod. DF



Mod. S

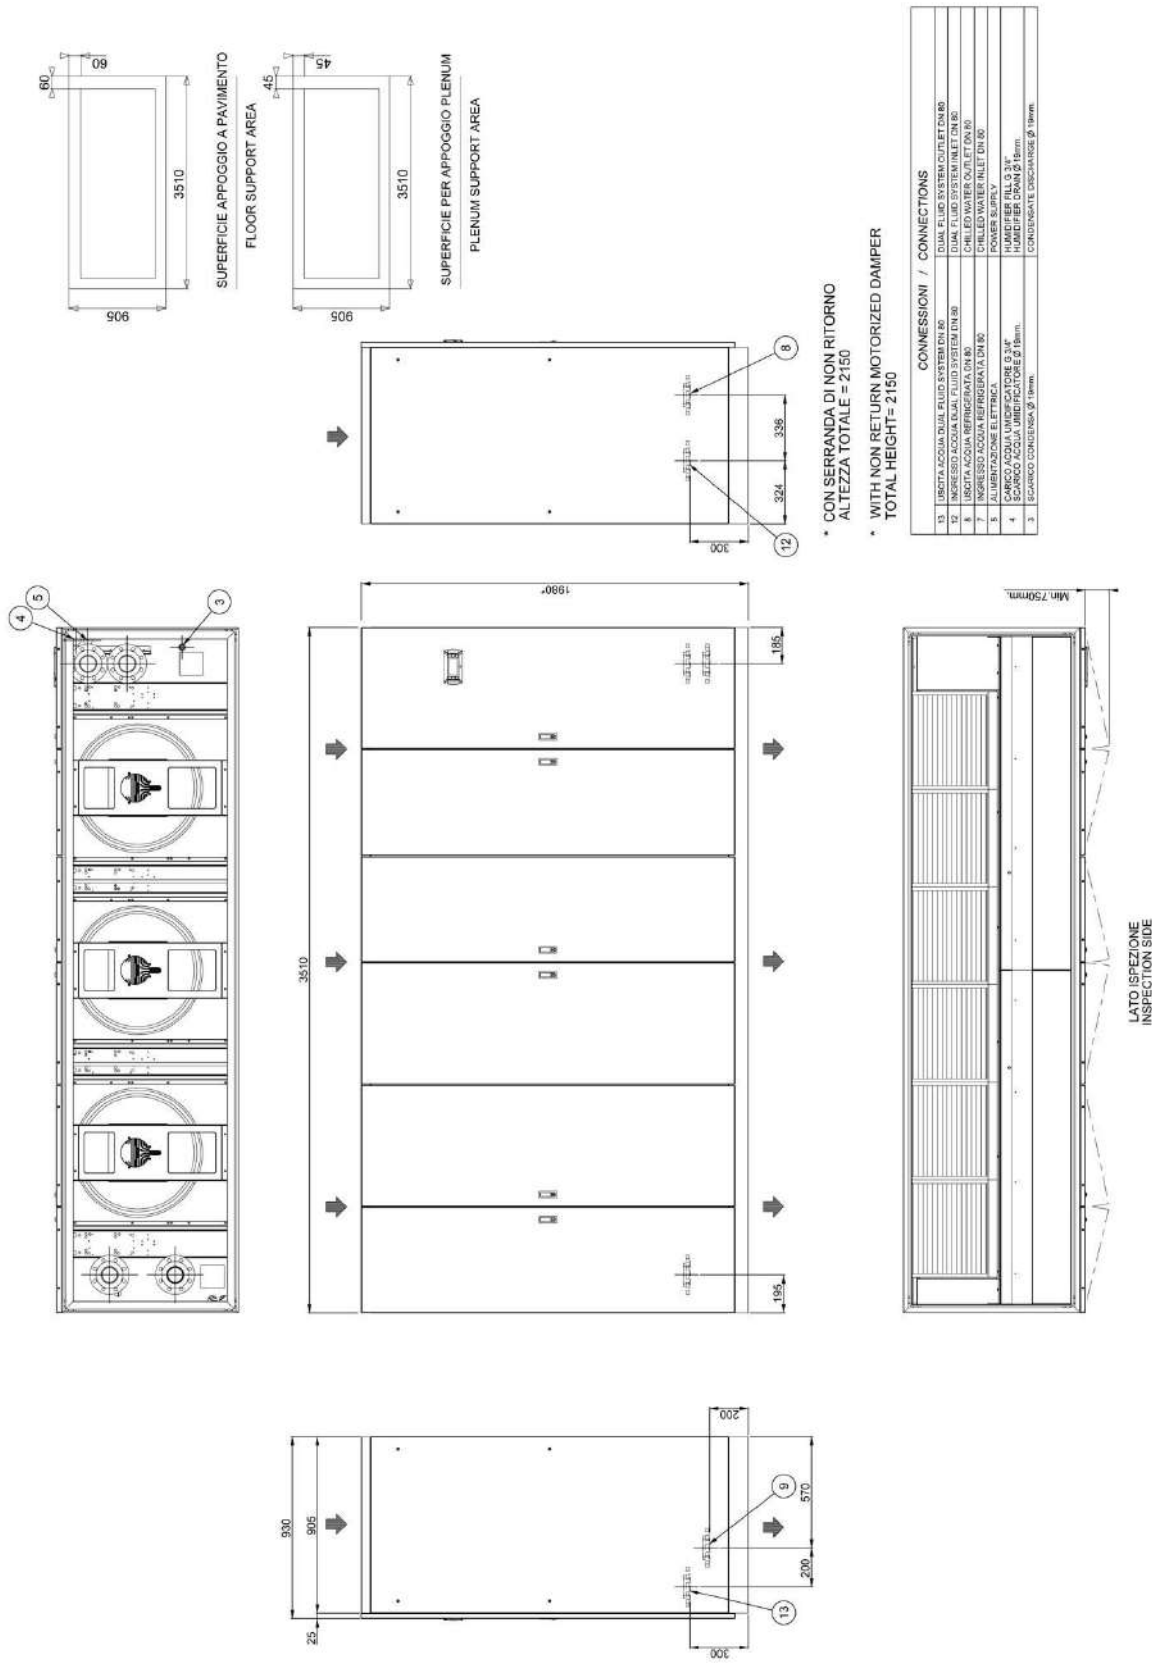



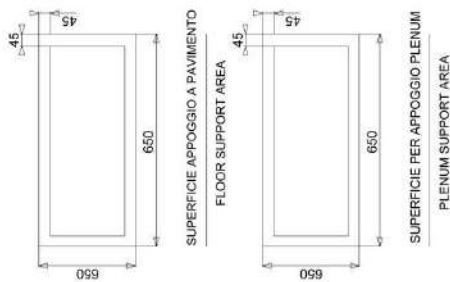



↑ FLUSSO ARIA
AIR FLOW


↑ RIPRESA ARIA, A BASAMENTO (A RICHIESTA CON PANNELLI FRONTALI CIECHI)
BOTTOM AIR INTAKE (ON REQUEST WITH BLIND FRONTAL PANELS)


- CON SERRANDA DI NON RITORNO
ALTEZZA TOTALE = 2095
- WITH NON RETURN MOTORIZED DAMPER
TOTAL HEIGHT = 2095


| CONNESSIONI / CONNECTIONS |
|---------------------------------------|
| 13 USCITA ACQUA DUAL FLUID SYSTEM 1 |
| 12 INGRESSO ACQUA DUAL FLUID SYSTEM 1 |
| 9 USCITA ACQUA REFRIGERATA R 1 |
| 8 INGRESSO ACQUA REFRIGERATA R 1 |
| 5 ALIMENTAZIONE ELETTRICA |
| 4 SCARICO ACQUA LUBRIFICATORE 18mm |
| 3 SCARICO CONDENSATE 18mm |

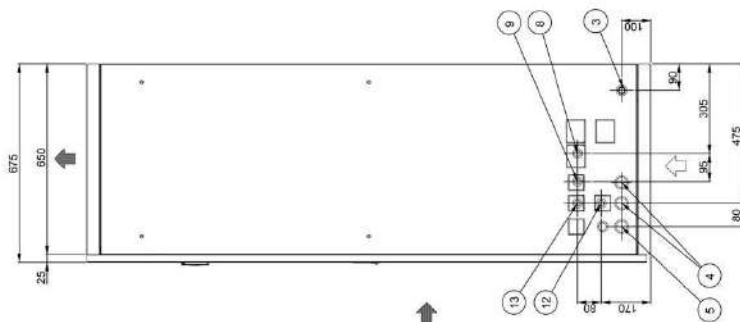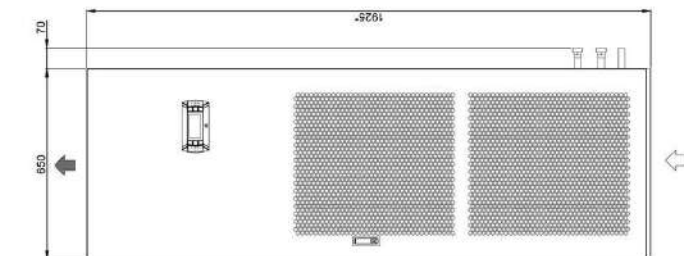


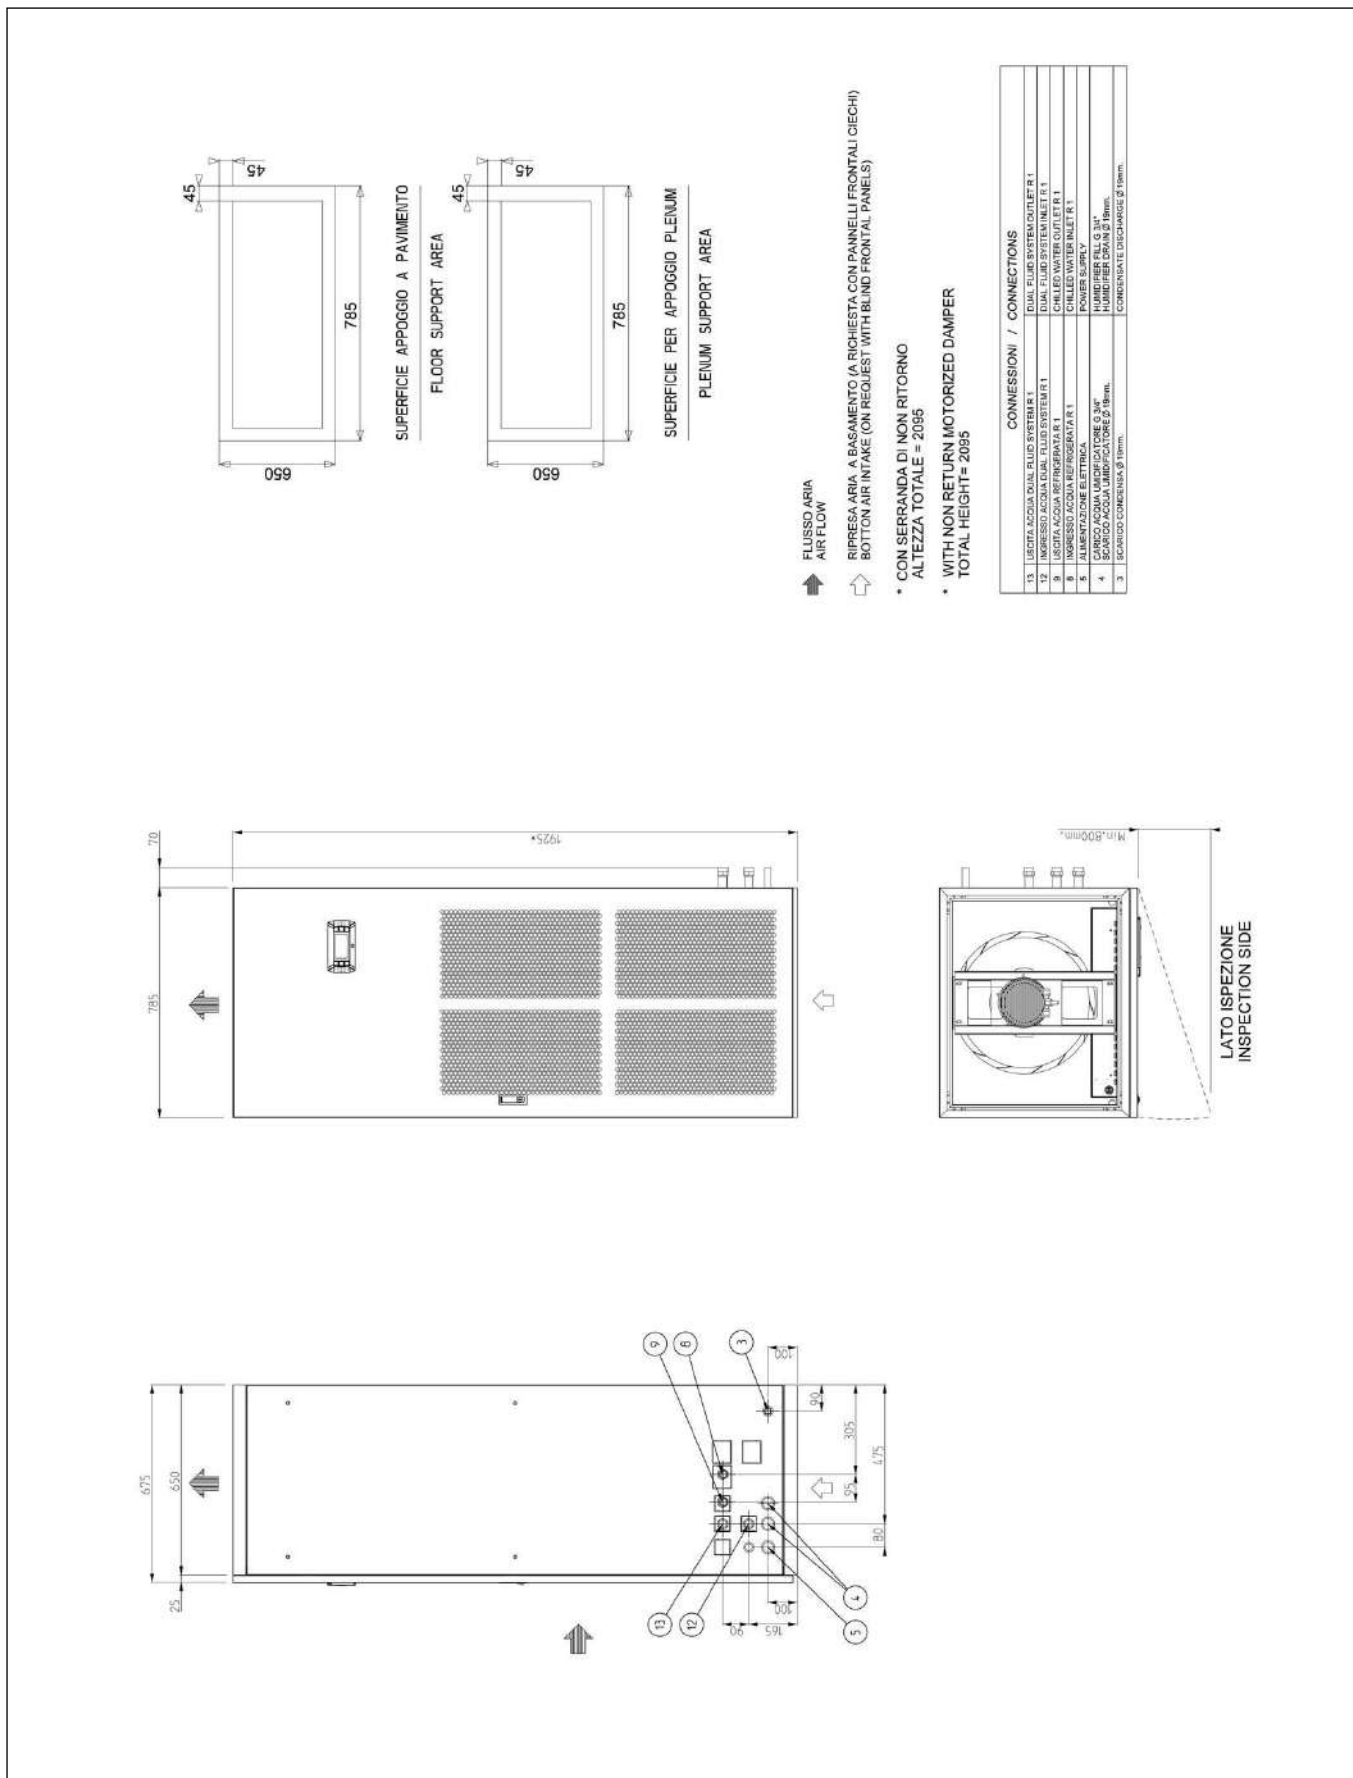


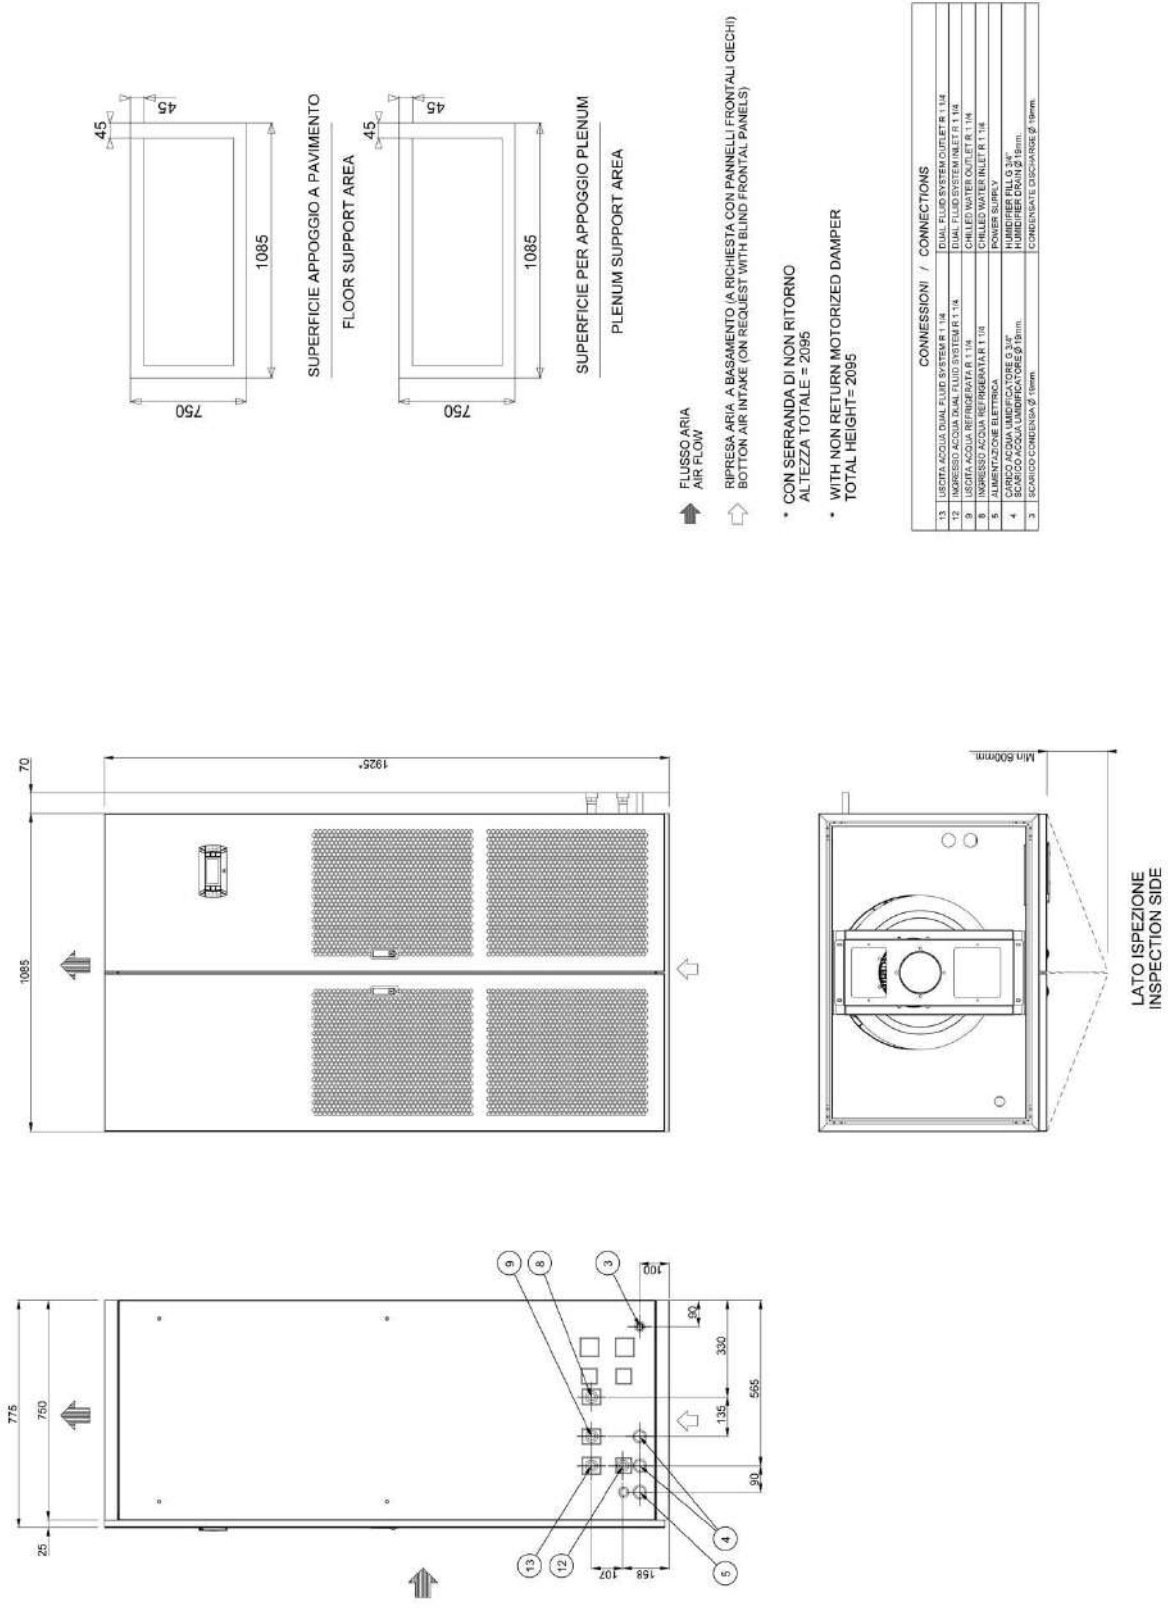


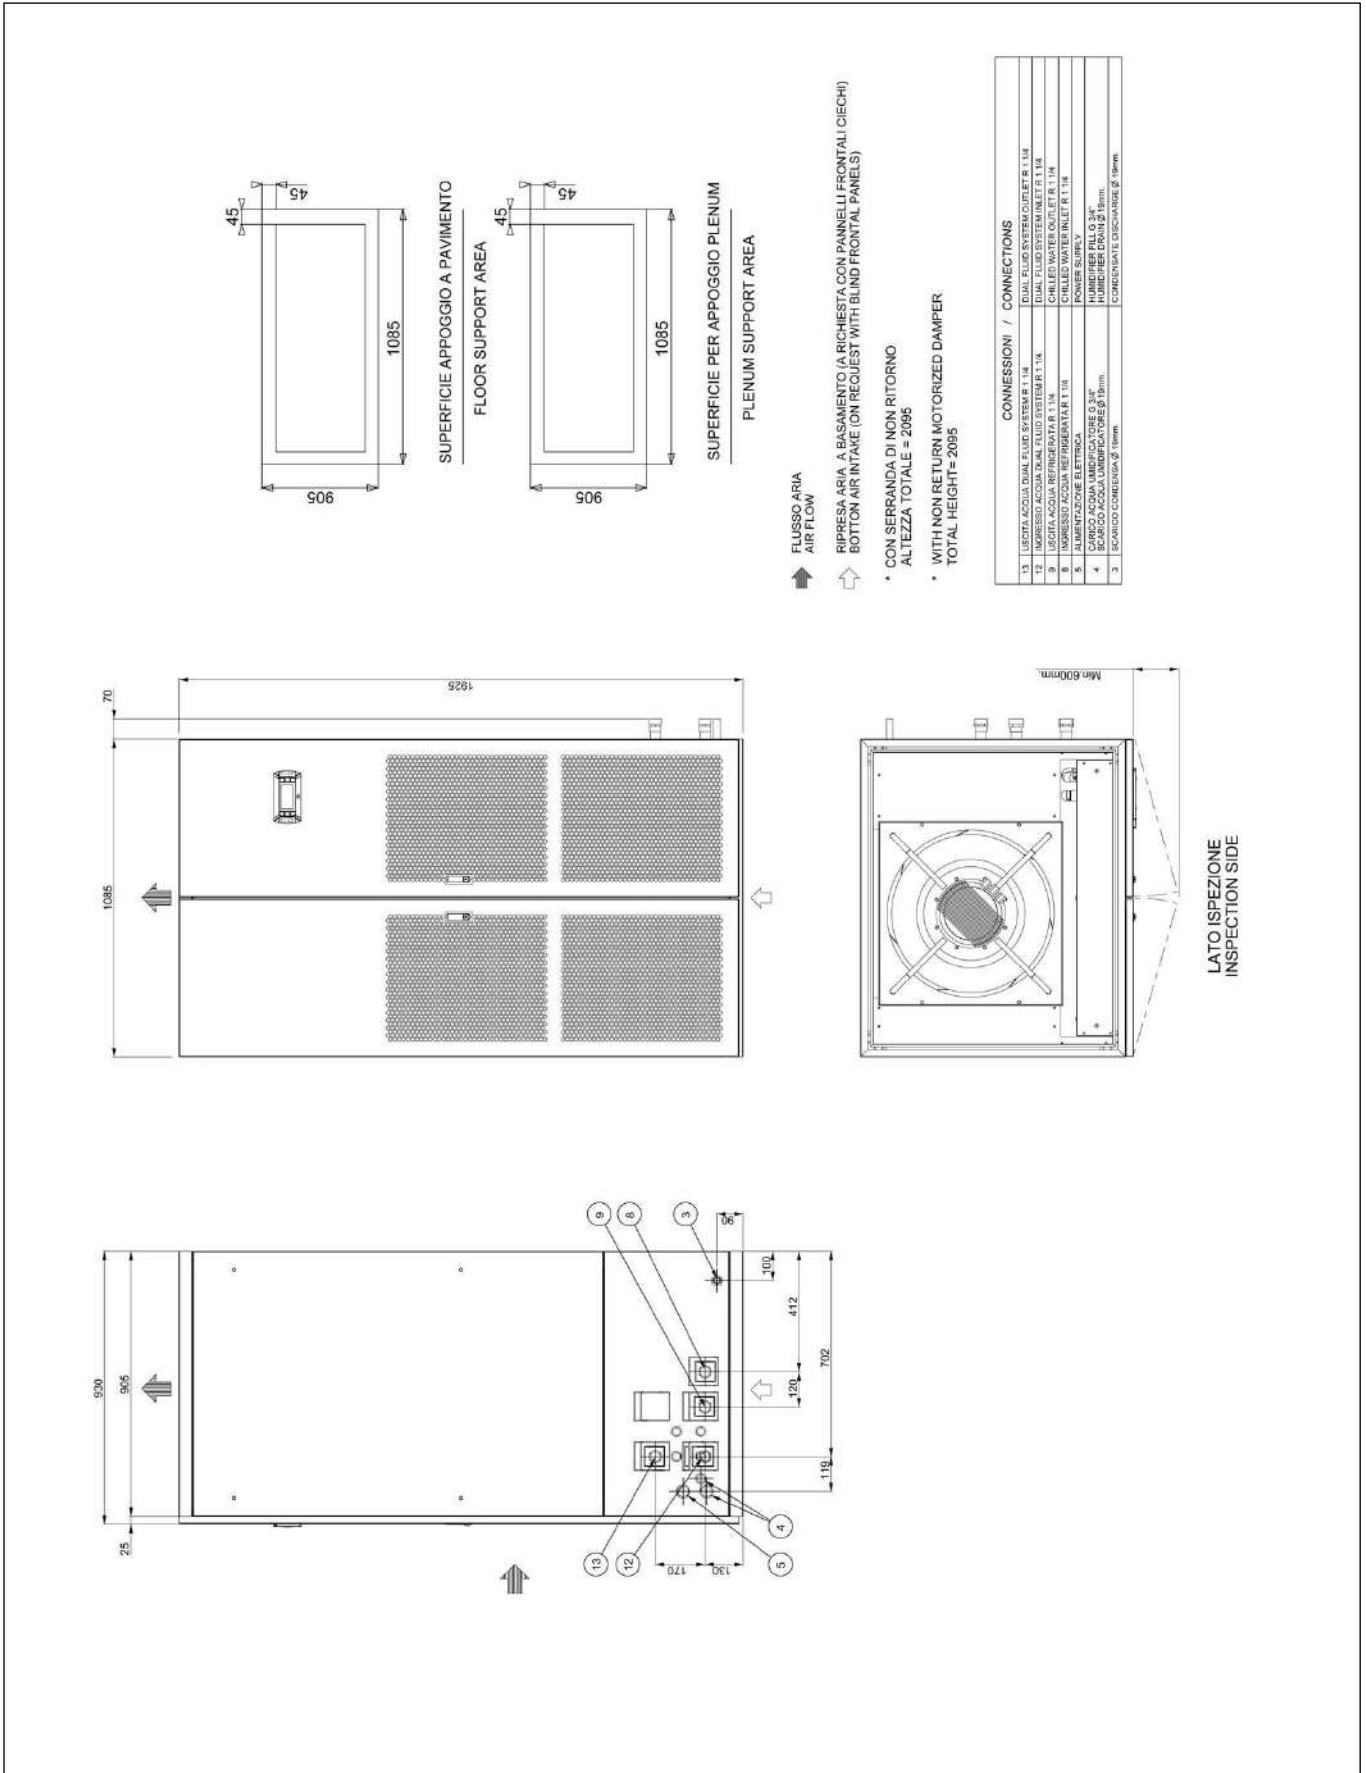


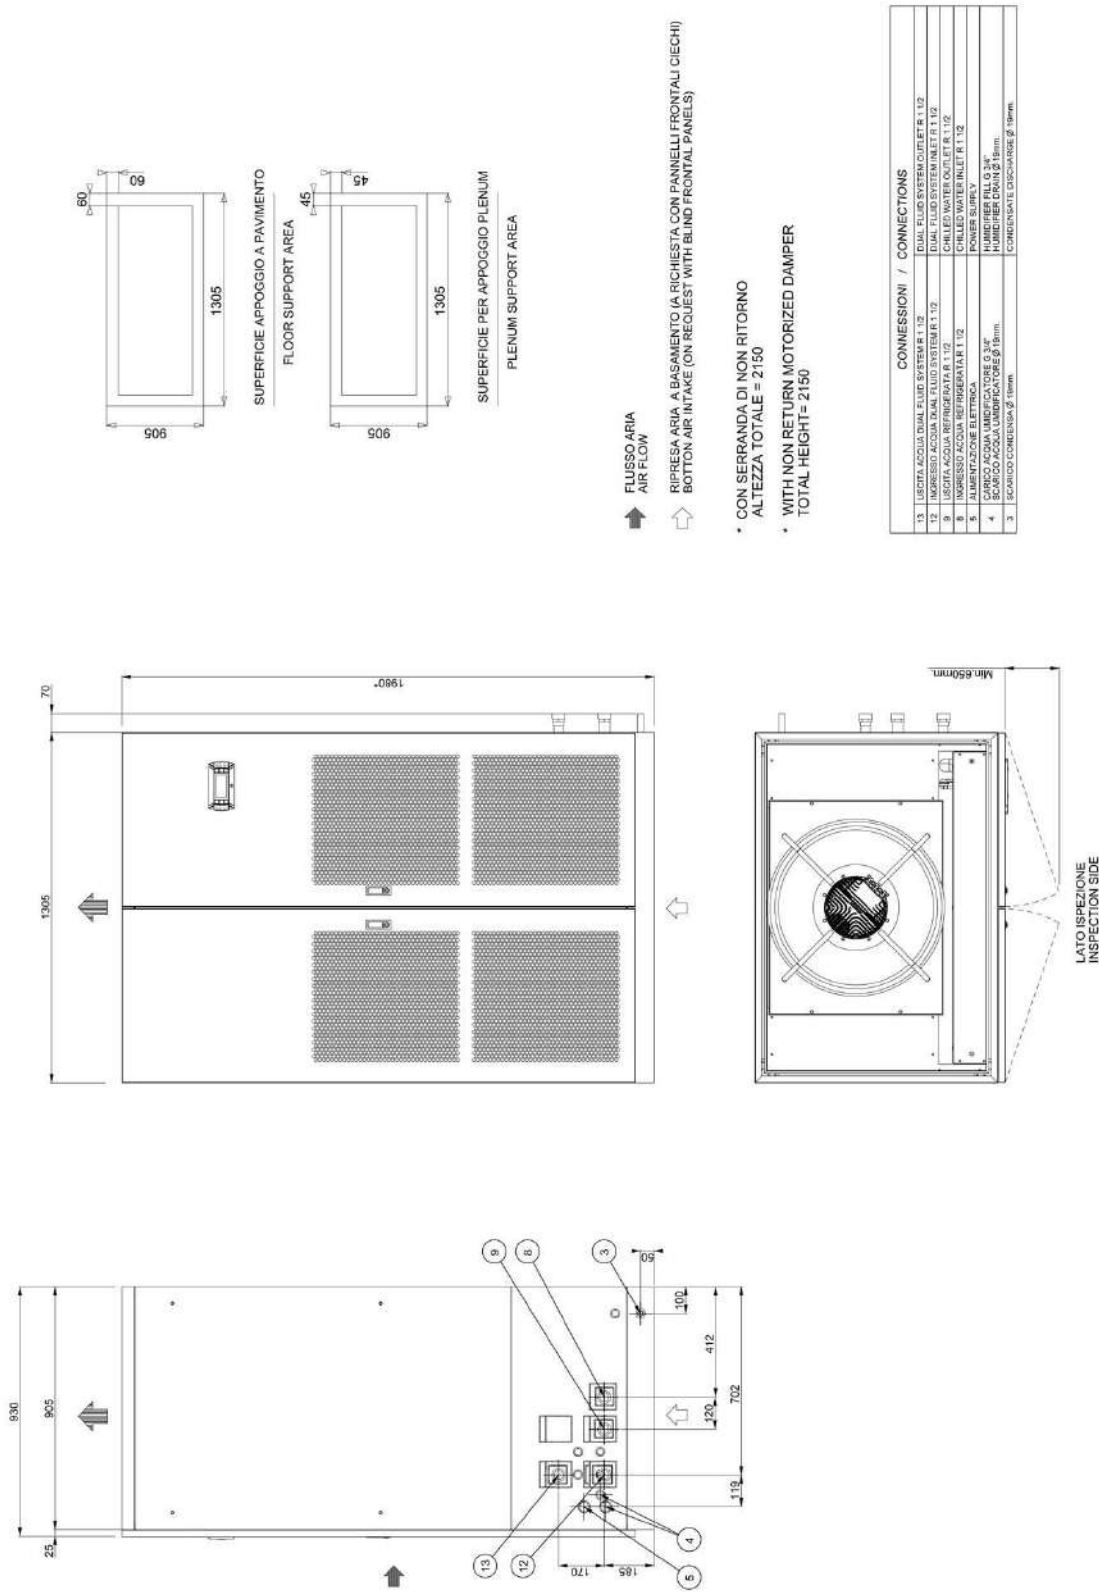


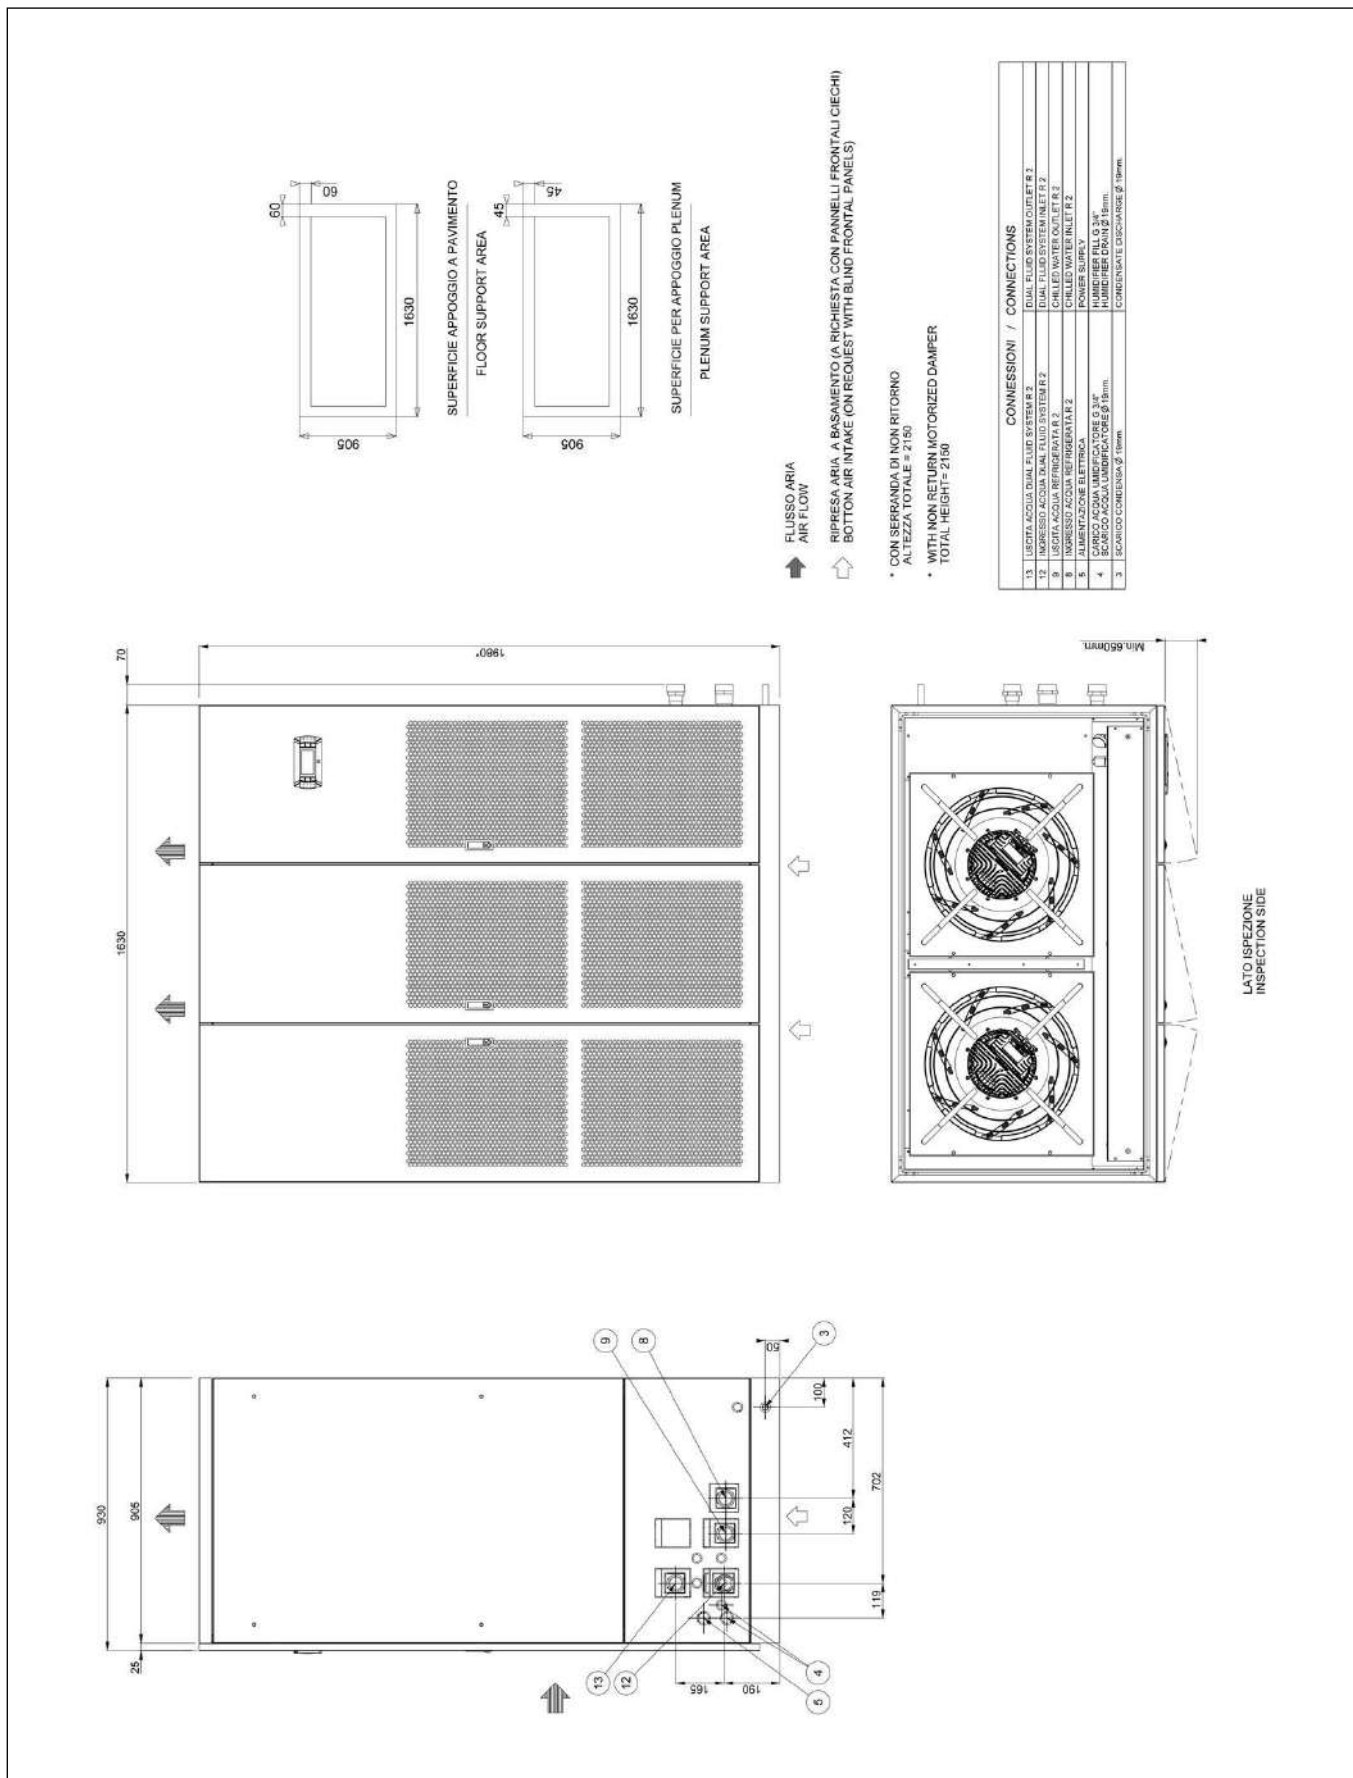

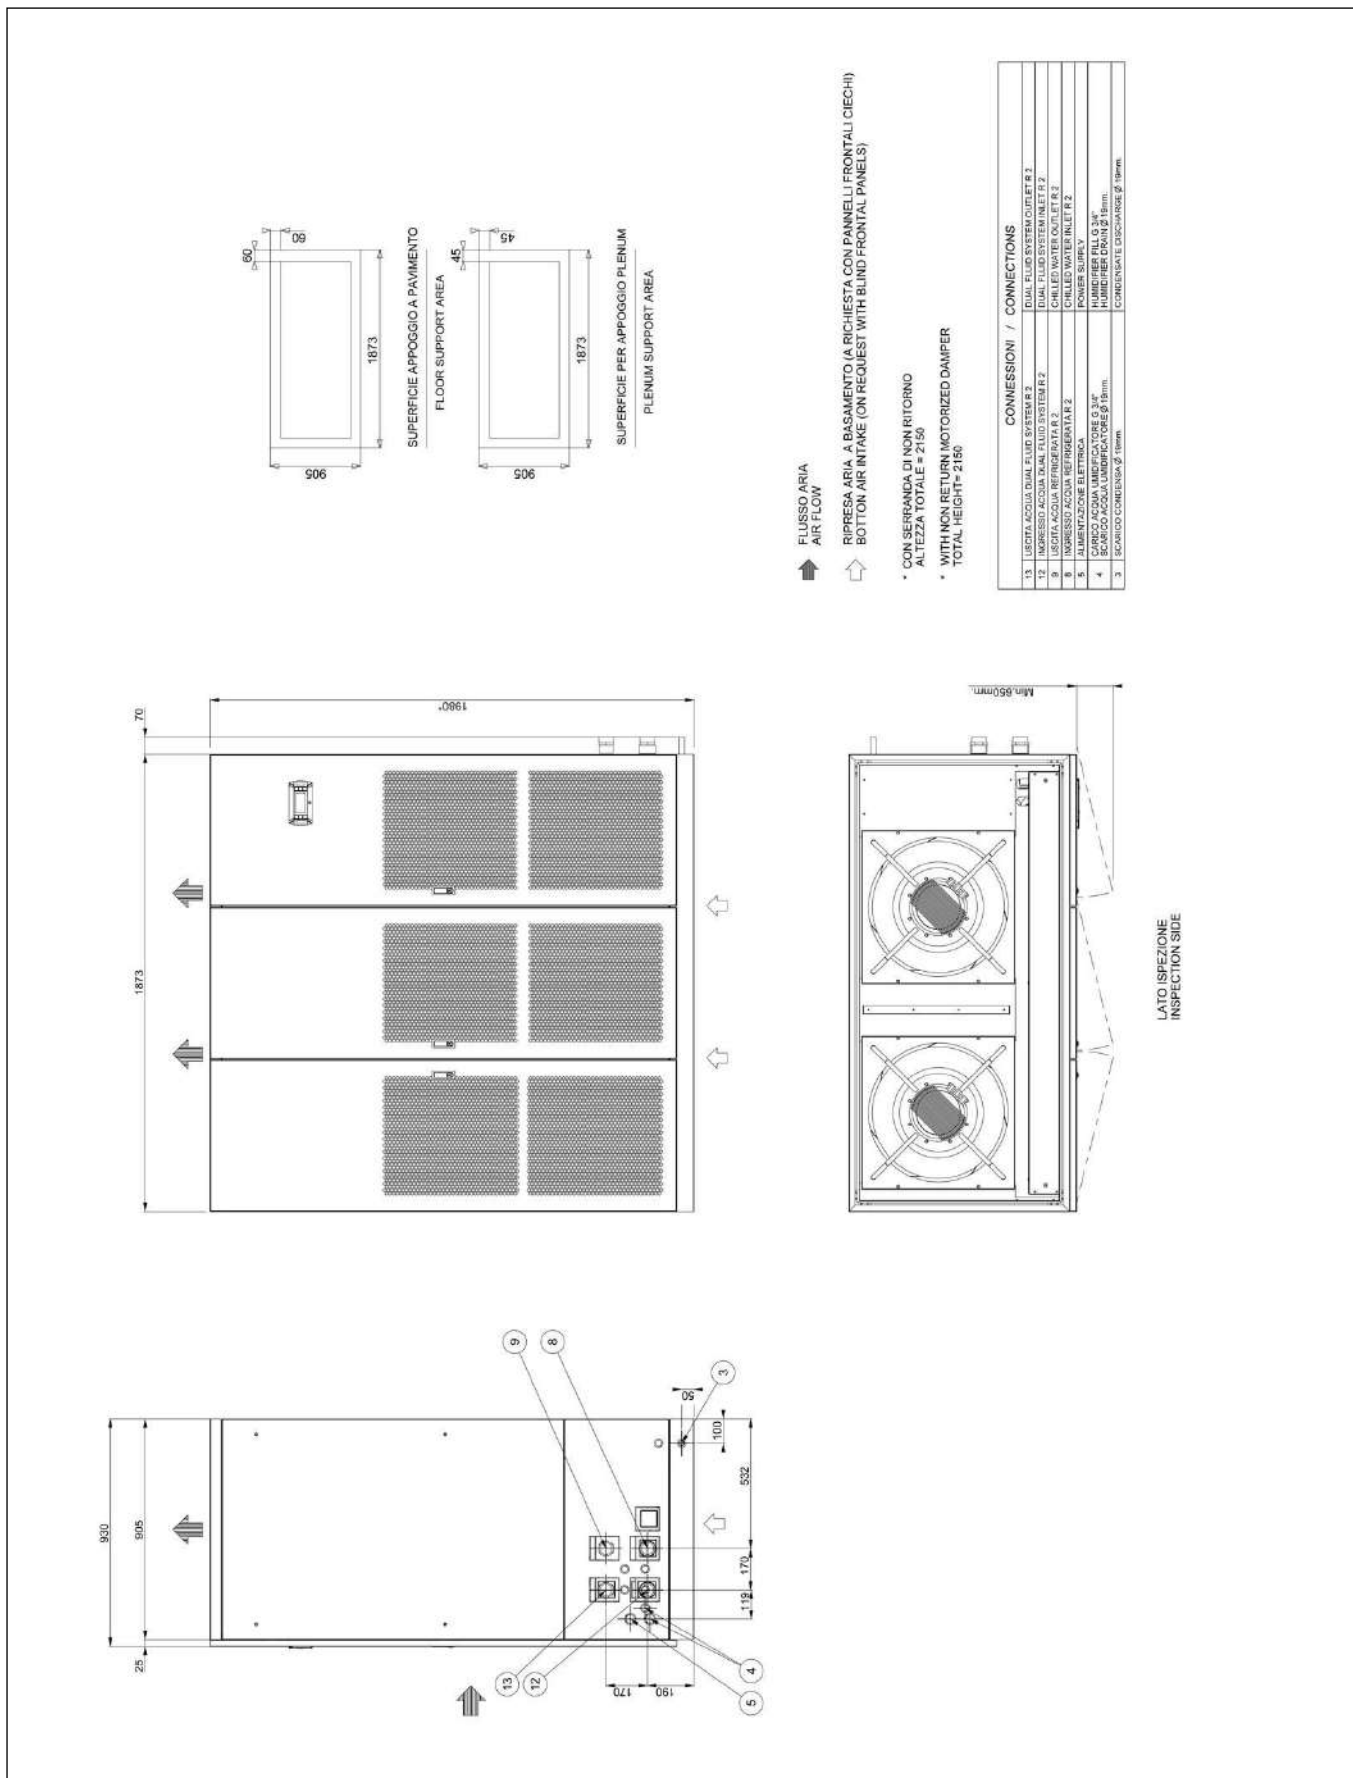

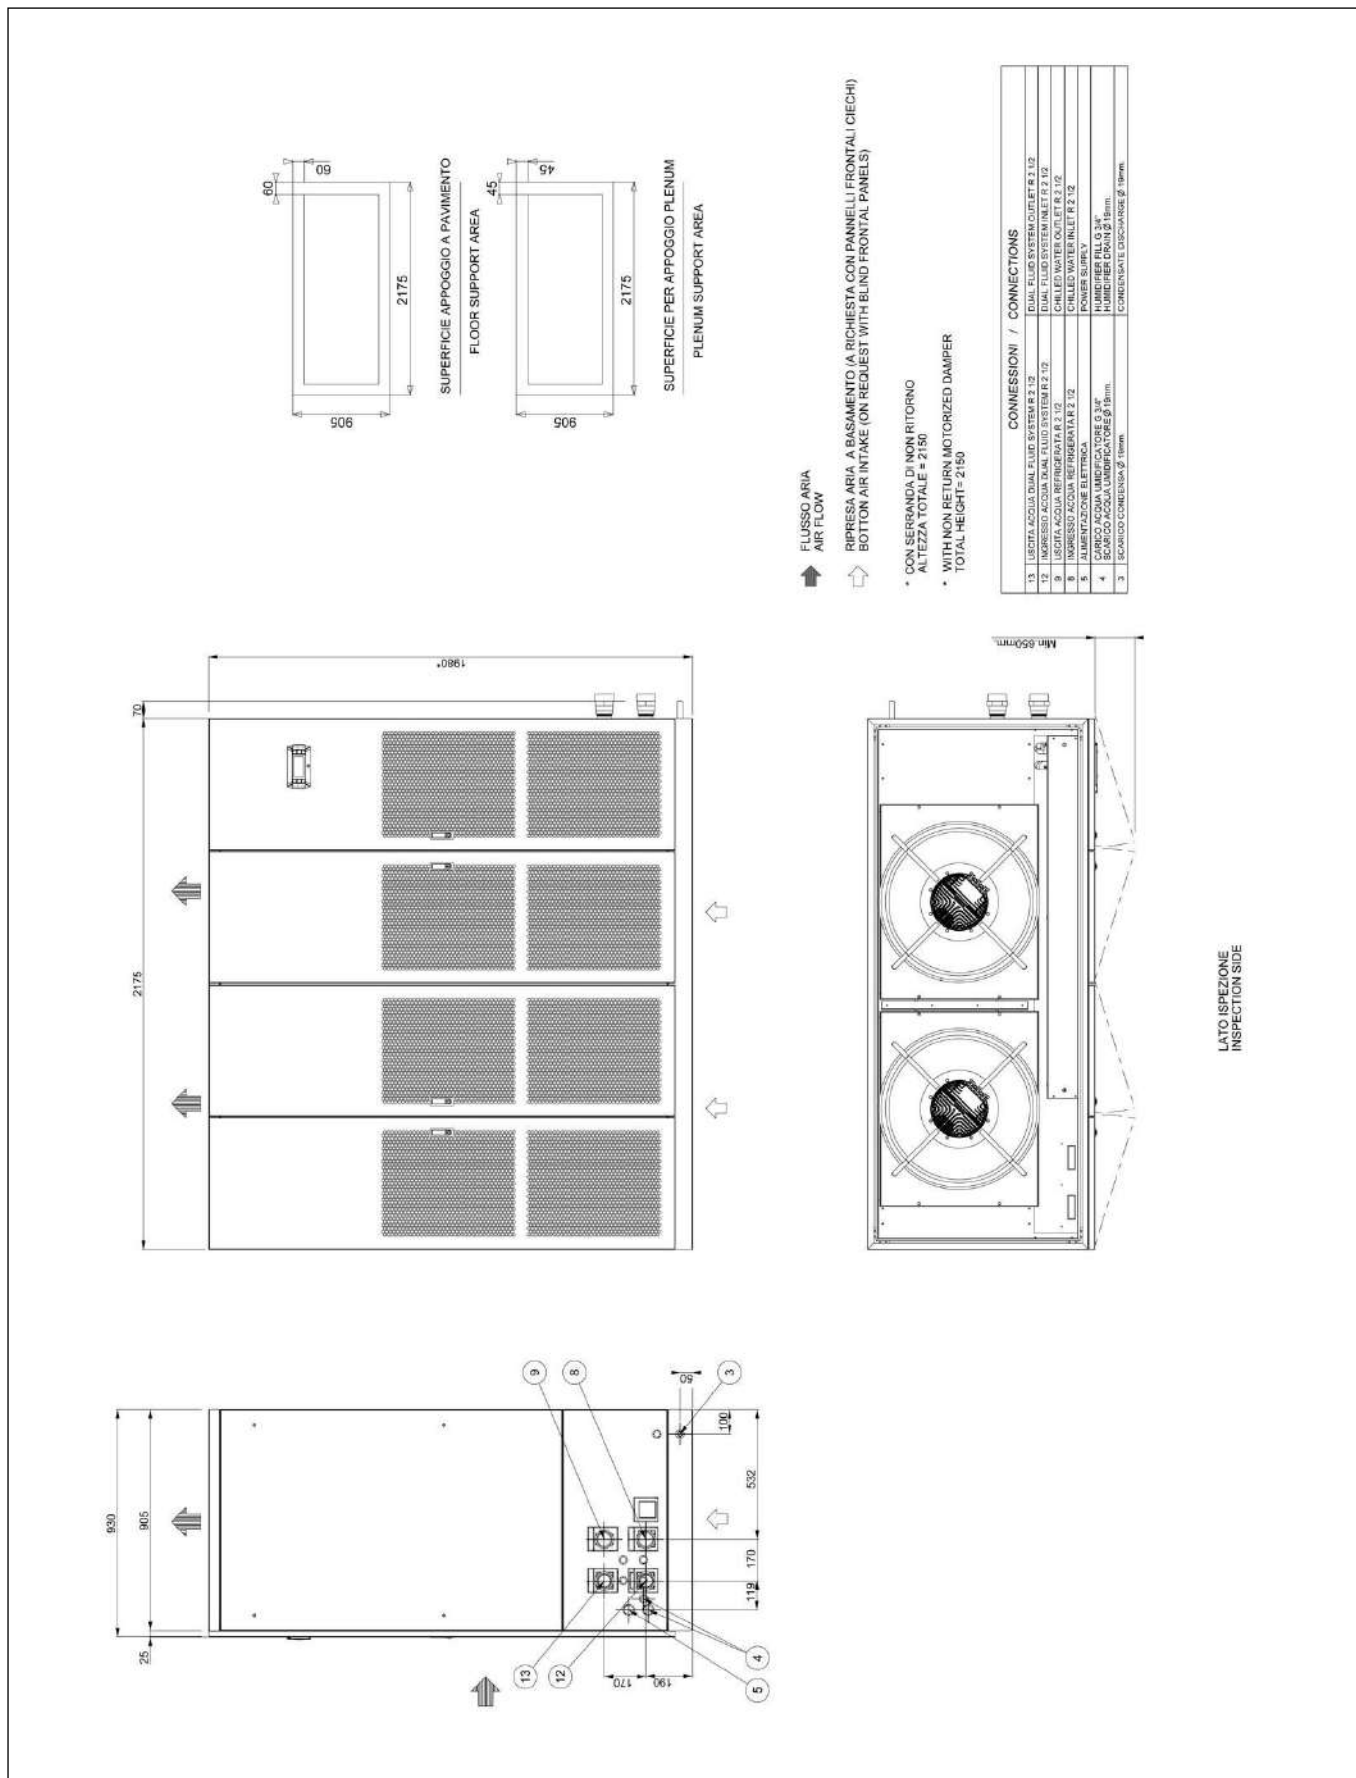


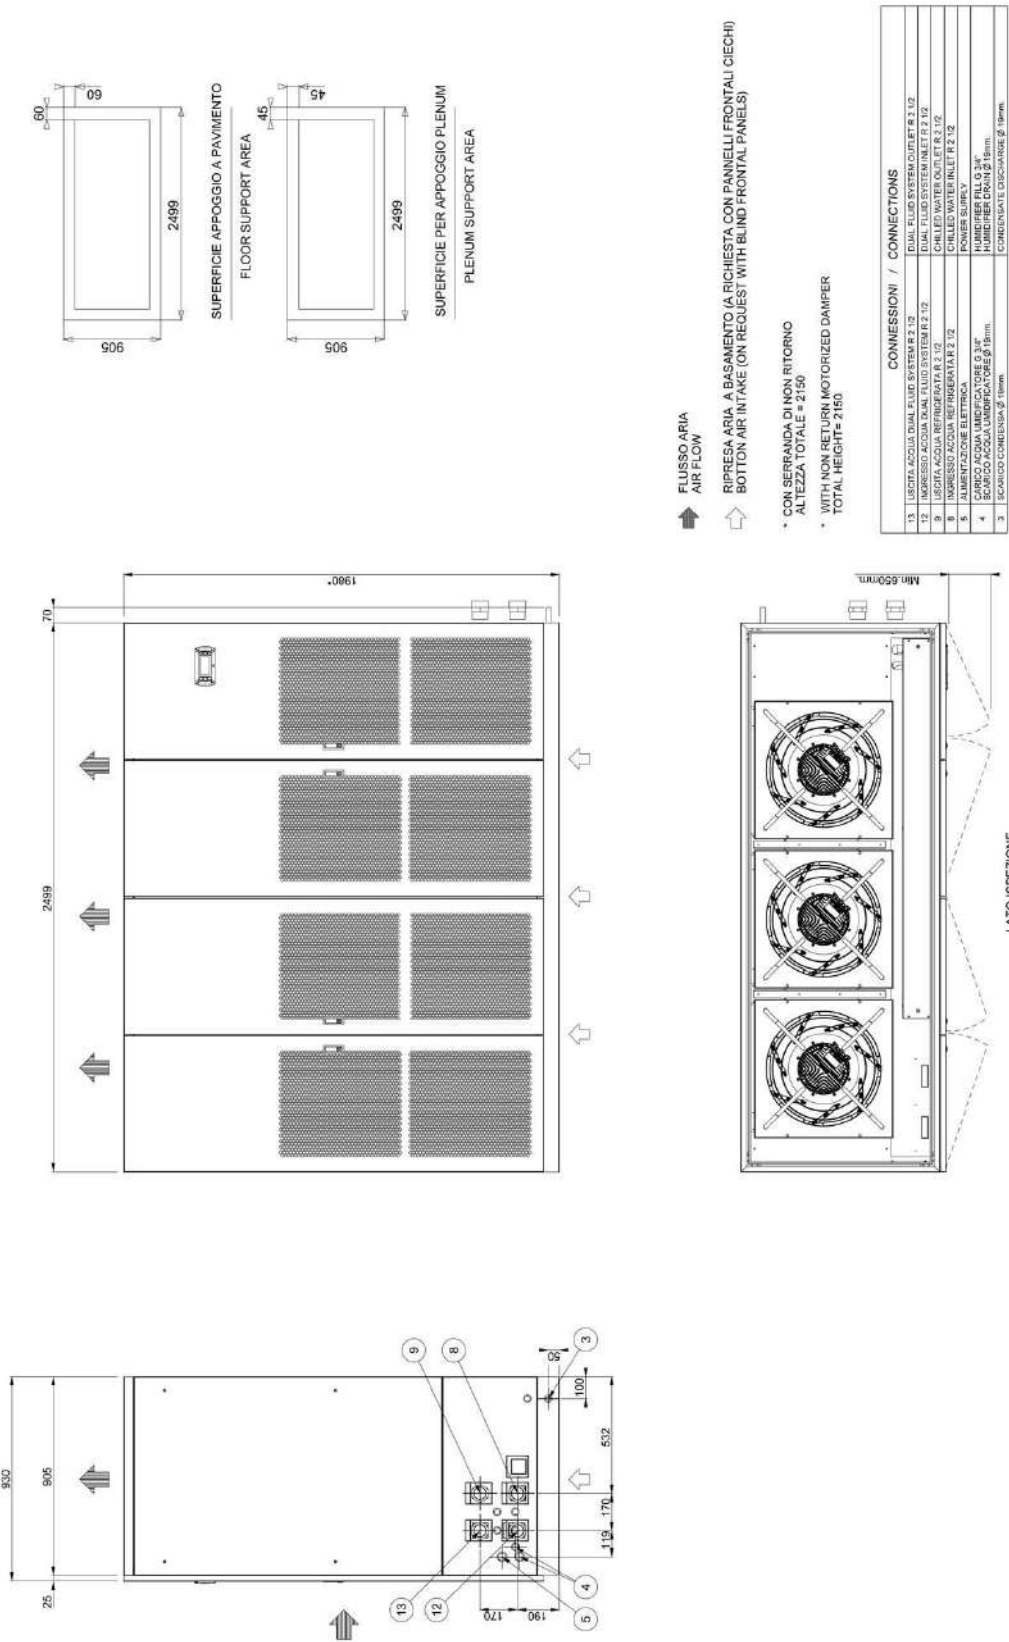

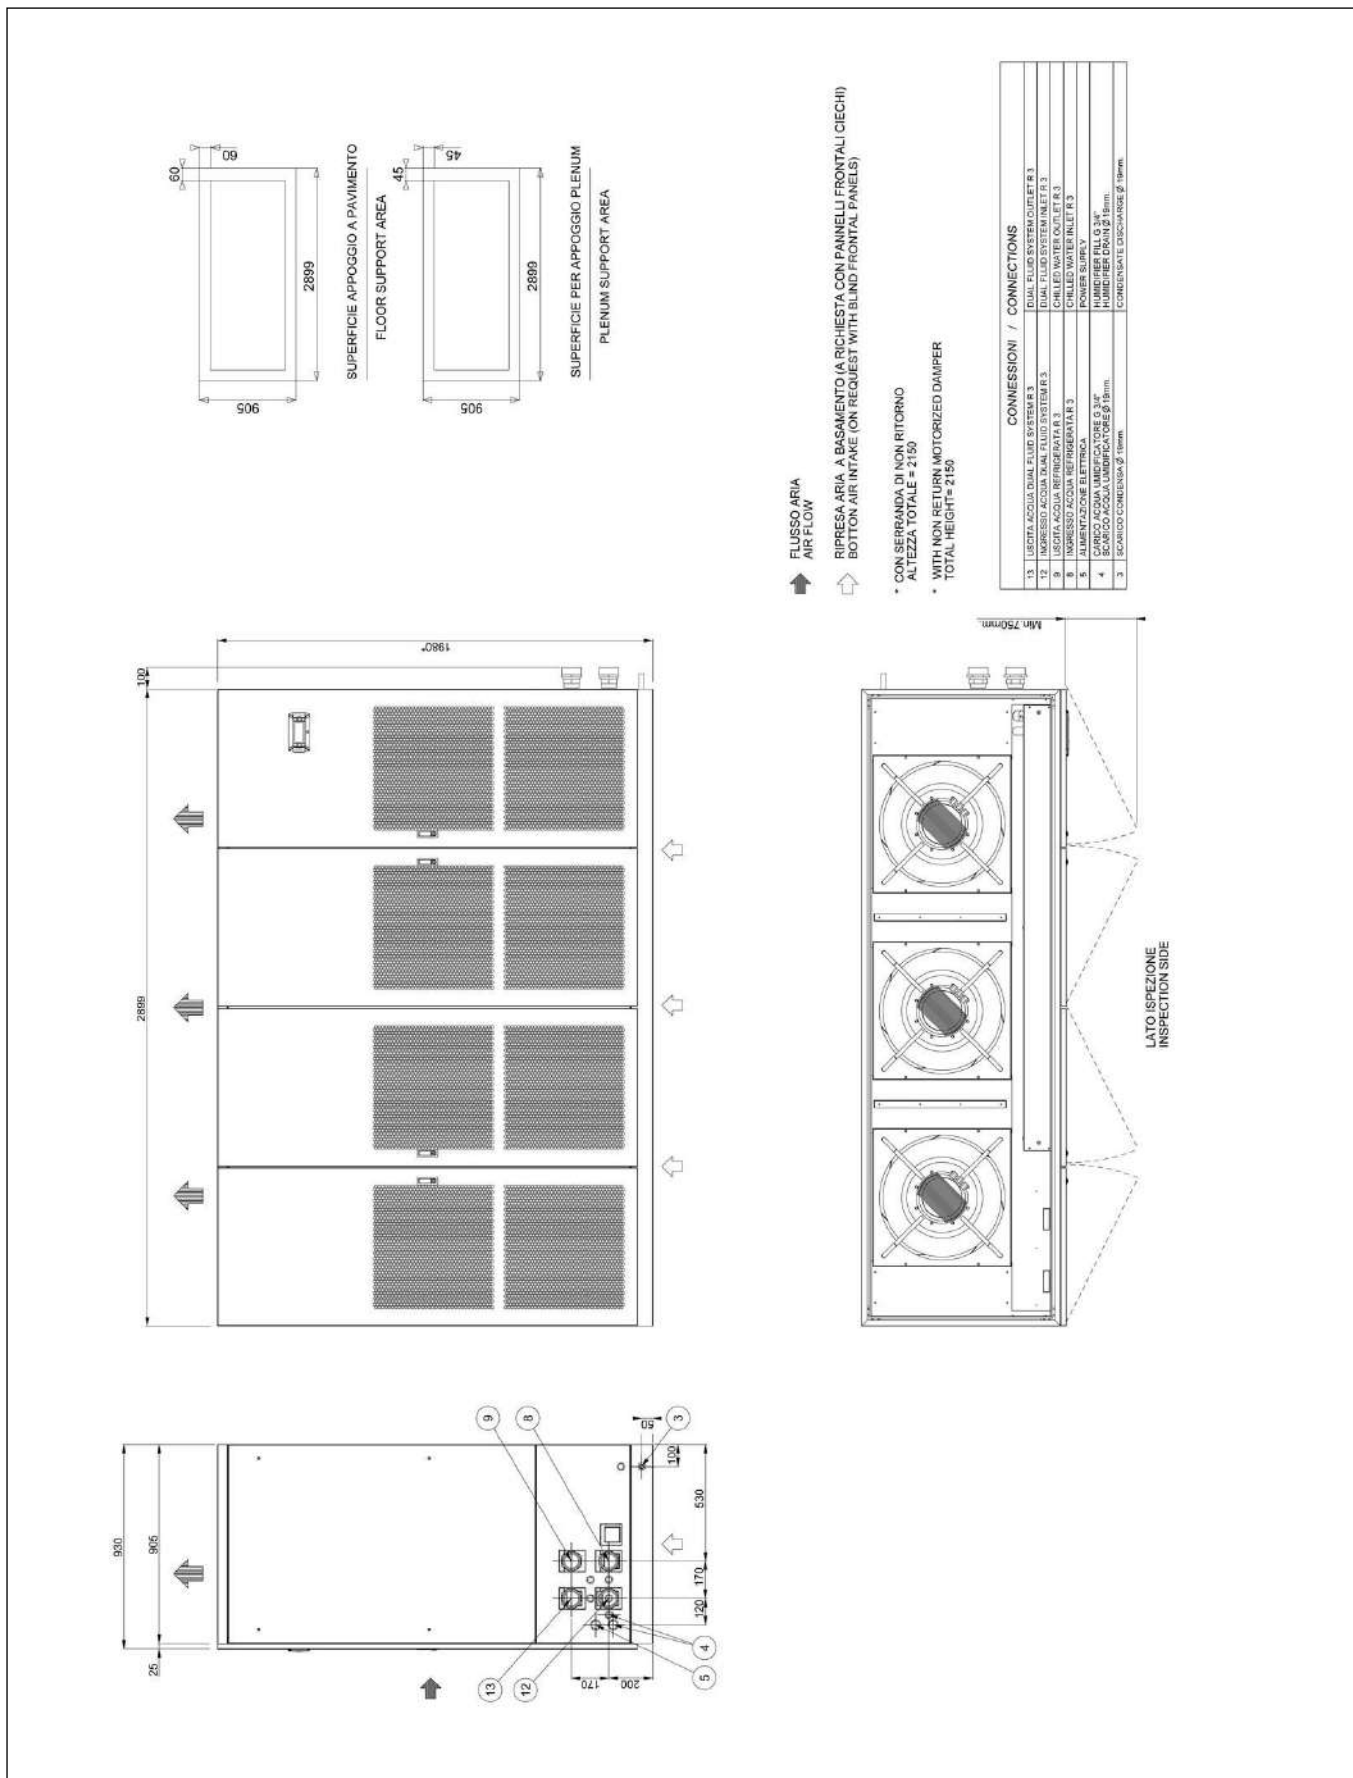

HOLE IN THE RAISED FLOOR FOR DOWNFLOW VERSION


HOLE IN THE RAISED FLOOR WITHOUT FLOOR STAND

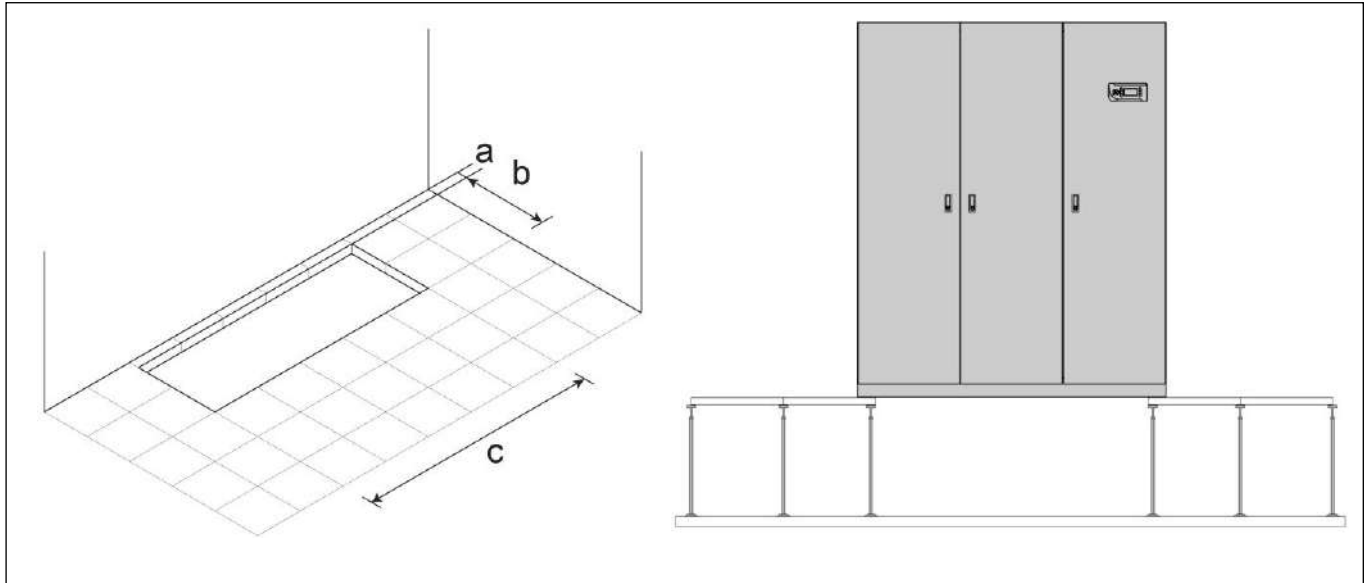

Foresee a hole in the floor with the following dimensions:

| SIZE | | E1 | E2 | E3 | E3P | E4 | E5 | E6 | E7 | E8 | E9 | E10 |
|------|----|-----|-----|-----|-----|------|------|------|------|------|------|------|
| a | mm | 95 | 95 | 95 | 95 | 110 | 110 | 110 | 110 | 110 | 110 | 110 |
| b | mm | 560 | 560 | 660 | 815 | 785 | 785 | 785 | 785 | 785 | 785 | 785 |
| c | mm | 560 | 695 | 995 | 995 | 1185 | 1510 | 1755 | 2055 | 2380 | 2780 | 3390 |

HOLE IN THE RAISED FLOOR WITH FLOOR STAND (OPTION)

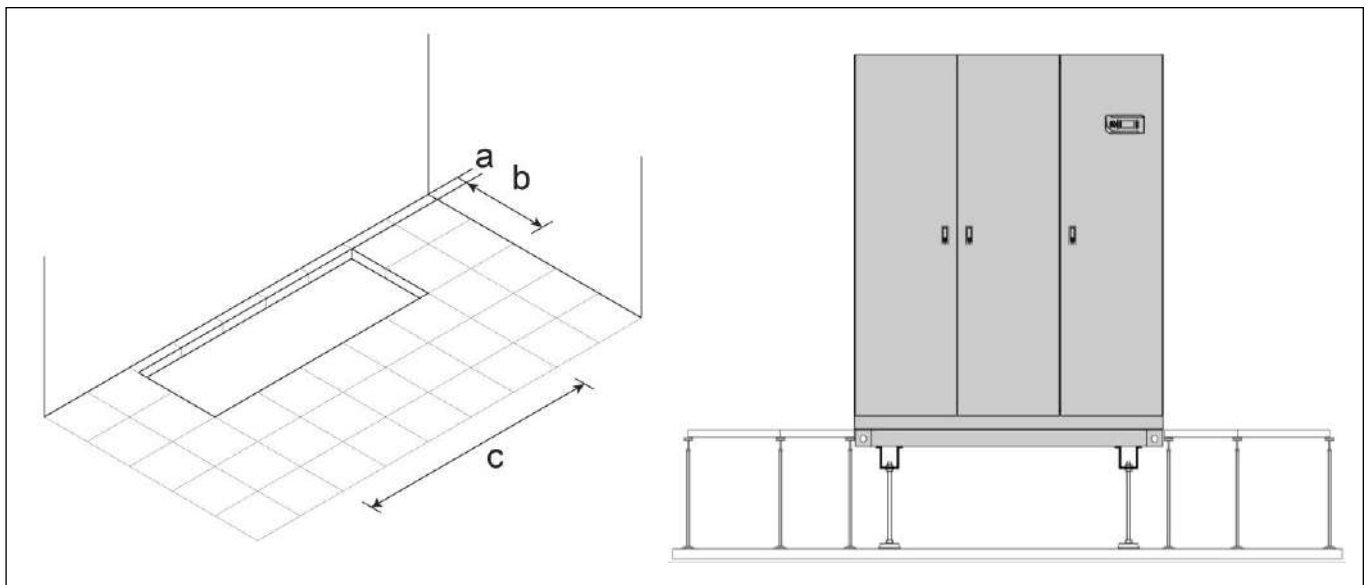


Foresee a hole in the floor with the following dimensions:

| SIZE | | E1 | E2 | E3 | E3P | E4 | E5 | E6 | E7 | E8 | E9 | E10 |
|------|----|-----|-----|------|------|------|------|------|------|------|------|------|
| a | mm | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 |
| b | mm | 670 | 670 | 770 | 925 | 925 | 925 | 925 | 925 | 925 | 925 | 925 |
| c | mm | 670 | 805 | 1105 | 1105 | 1325 | 1650 | 1895 | 2195 | 2520 | 2920 | 3530 |


EXAMPLE FOR MACHINES NOISE EMISSION CALCULATION

UNDER MACHINE WITH DUCT ON AIR INTAKE

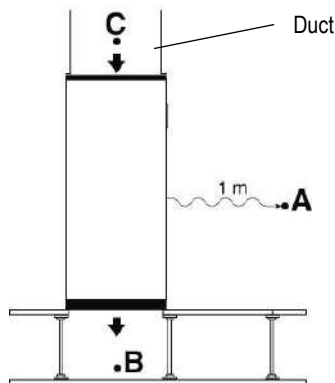

- Lp A = Front side Under catalogue value
- Lp B = Air delivery Under catalogue value
- Lp C = Air intake Under catalogue value
- The points B and C do not influence the point A


UNDER MACHINE WITH PLENUM ON AIR DELIVERY

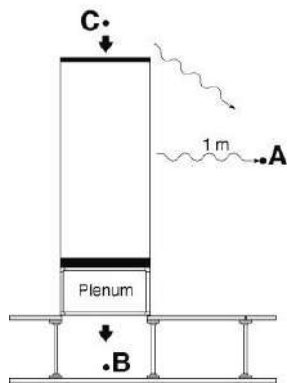

- Lp A = Front side Under catalogue value
- Lp B = Air delivery Under catalogue value – plenum noise reduction
- Lp C = Air intake Under catalogue value
- $Lp A+C = 10 \log_{10} \left(10^{\frac{LpA}{10}} + 10^{\frac{LpC}{10}} \right)$

The point B do not influence the point A


UNDER MACHINE WITH PLENUM ON AIR INTAKE

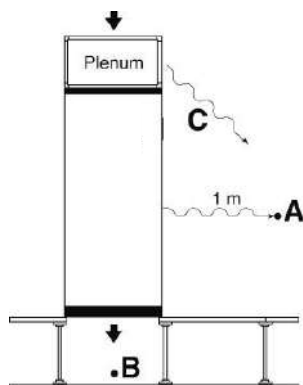

- Lp A = Front side Under catalogue value
- Lp B = Air delivery Under catalogue value
- Lp C = Air intake Under catalogue value – plenum noise reduction
- $Lp A+C = 10 \log_{10} \left(10^{\frac{LpA}{10}} + 10^{\frac{LpC}{10}} \right)$

The point B do not influence the point A


OVER MACHINE WITH DUCT

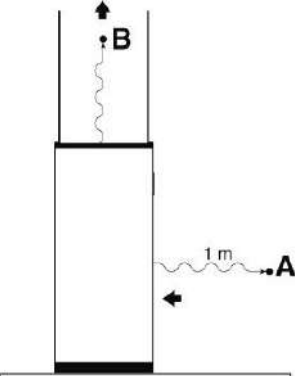

- Lp A = Air intake Over catalogue value
- Lp B = Air delivery Over catalogue value
- The point B do not influence the point A

EXAMPLE FOR MACHINES NOISE EMISSION CALCULATION

OVER MACHINE WITH PLENUM ON AIR DELIVERY




$L_p A$ = Air intake Over catalogue value

$L_p B$ = Air delivery Over catalogue value – plenum noise reduction

$$L_p A+B = 10 \log_{10} \left(10^{\frac{L_p A}{10}} + 10^{\frac{L_p C}{10}} \right)$$

OVER MACHINE WITH DUCT AND PLENUM ON AIR DELIVERY

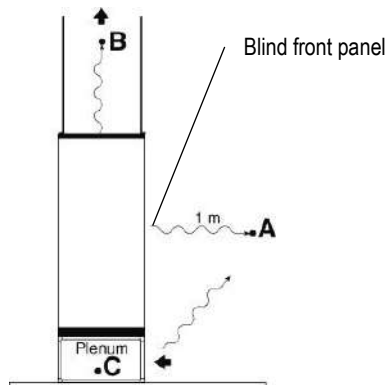

$L_p A$ = Front side Over catalogue value


$L_p B$ = Air delivery Over catalogue value

$L_p C = L_p A + 6dB(A)$ – plenum noise reduction

$$L_p A+C = 10 \log_{10} \left(10^{\frac{L_p A}{10}} + 10^{\frac{L_p C}{10}} \right)$$

The point **B** do not influence the point **A+C**

OVER MACHINE WITH DUCT AND PLENUM ON AIR DELIVERY

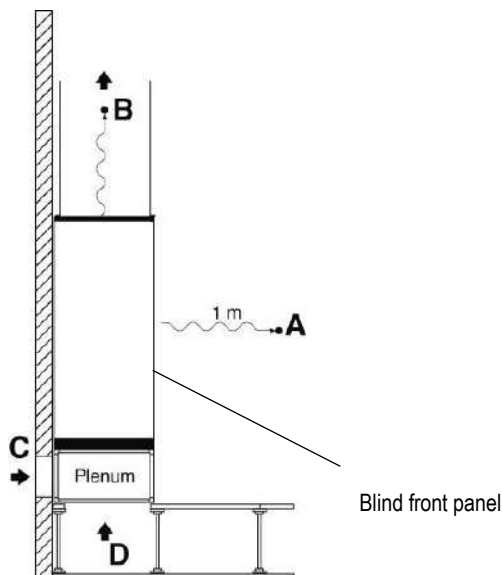

$L_p A$ = Front side Over catalogue value

$L_p B$ = Air delivery Over catalogue value

$L_p C = L_p D = L_p A + 6 dB(A)$ – plenum noise reduction

The points **B, C** and **D** do not influence the point **A**

IMPORTANT

The declared noise levels are intended in free field conditions.

The noise pressure level of an installed unit is affected by the room acoustic characteristics.

Please consider an average noise increase of +4/+6 dB(A).

VALVE PRESSURE DROP CALCULATION AS FUNCTION OF WATER FLOW RATE

Flow coefficient k_v defines the water flow (between 5°C and 40°C) expressed in m³/h that cross a valve with a pressure drop of 1bar (100kPa).

With this data is possible to calculate the localized pressure drop as function of the water flow rate.

$$\Delta P = (Q / k_v)^2$$

ΔP (bar) = localized pressure drop of valve;

Q (m³/h) = water flow rate – it varies according to the desired operating condition;

k_v (m³/h) = valve flow coefficient.

The formula allows to calculate the value of the localized pressure drop (in bar).

The pressure drops values showed on the documentation are supplied in kPa.

Is possible to change from one unit to another through the following conversion.

$$1 \text{ bar} = 100\text{kPa}$$

CALCULATION EXAMPLE OF 2-WAY VALVE FOR BY-PASS PRESSURE DROP IN FUNCTION OF WATER FLOW RATE

Model 120 E8



Example at nominal conditions. Characteristics referred to entering air at 24°C-50%RH with chilled water temperature 7-12°C - 0% glycol.

Water flow rate: 20,9 m³/h

Valve flow coefficient k_v : 25 m³/h

$$\text{2-way valve for by-pass pressure drop: } \Delta P = (Q / k_v)^2 = (20,9 / 25)^2 = 0,698 \text{ (bar)} * 100 \text{ (kPa / bar)} = 69,8 \text{ kPa}$$

**AIR FILTERS REPLACEMENT
FOR UNDER VERSION MACHINES SIZE E3P – E4 – E5 – E6 – E7 – E8 – E9 – E10**

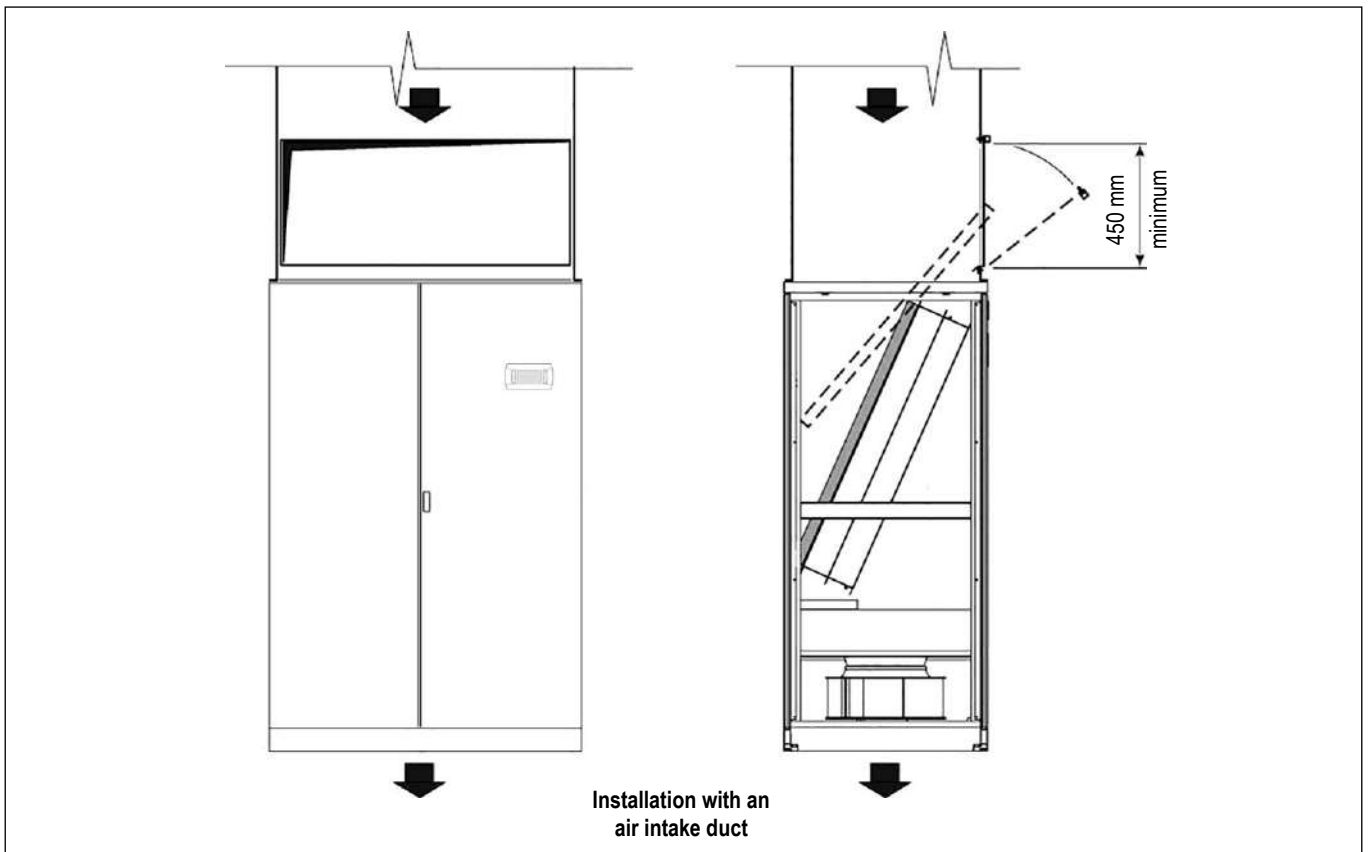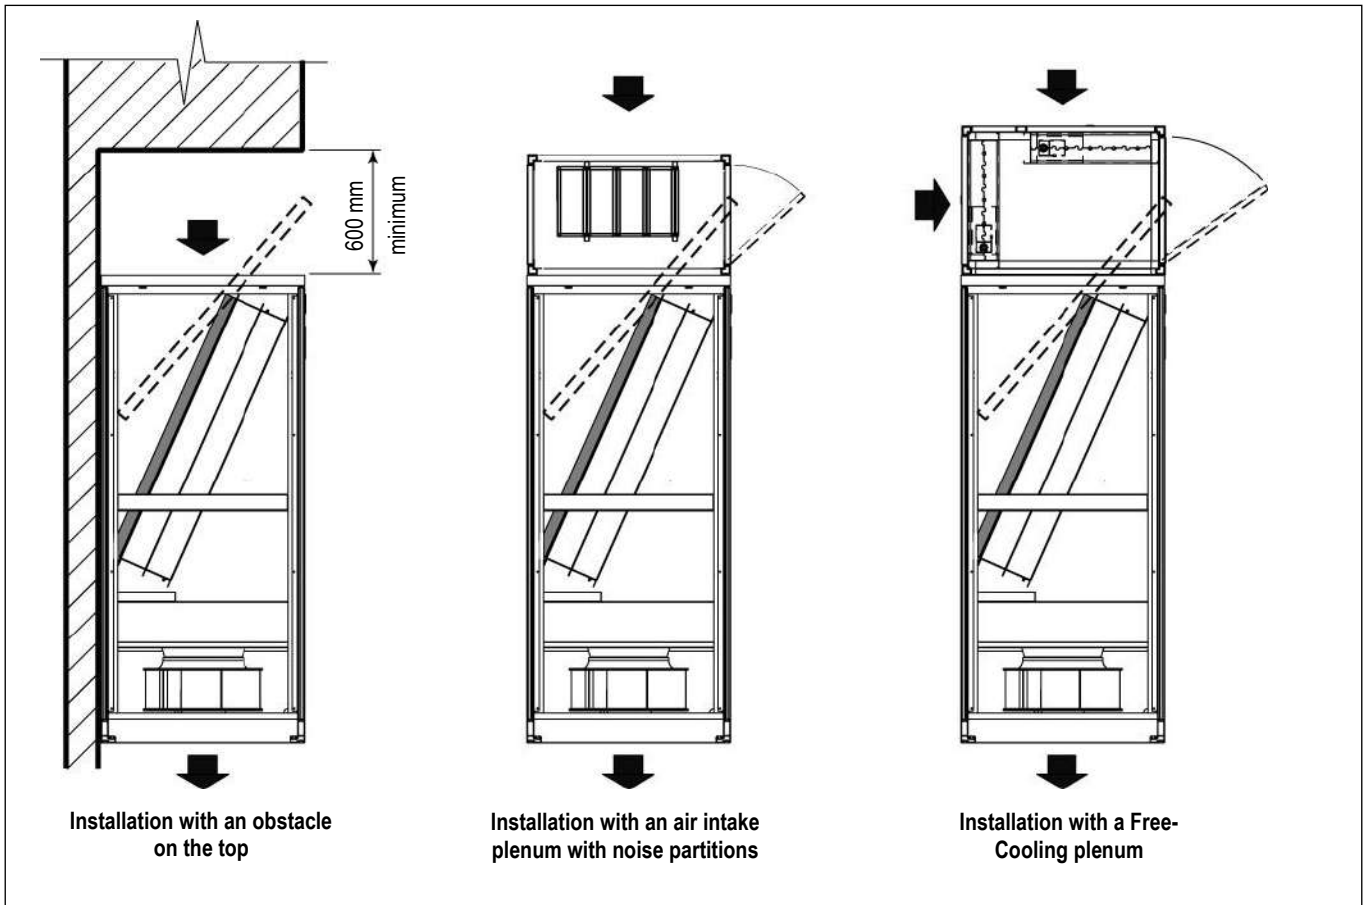


SHIPMENT: PACKING DIMENSIONS

Values referred to basic machine. The presence of some accessories increases the weight of machine.


The machines are shipped on pallet and covered with shrink wrap.
On request packing on pallet covered with shrink wrap and wooden cage.

STANDARD PACKING DIMENSIONS



| Size | A (mm) | B (mm) | H (mm) |
|------|--------|--------|--------|
| E1 | 750 | 750 | 2080 |
| E2 | 900 | 750 | 2080 |
| E3 | 1200 | 910 | 2080 |
| E3P | 1200 | 1050 | 2080 |
| E4 | 1400 | 1050 | 2130 |
| E5 | 1750 | 1050 | 2130 |
| E6 | 2000 | 1050 | 2130 |
| E7 | 2280 | 1050 | 2130 |
| E8 | 2650 | 1050 | 2130 |
| E9 | 3000 | 1050 | 2130 |
| E10 | 3600 | 1050 | 2130 |

OPTIONAL 9973: WOODEN CAGE PACKING DIMENSIONS

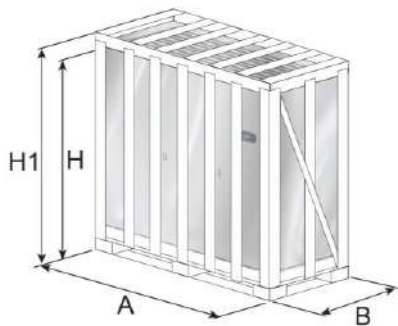

| Size | A (mm) | B (mm) | H (mm) | H1 (*) (mm) |
|------|--------|--------|--------|-------------|
| E1 | 790 | 790 | 2150 | 2350 |
| E2 | 940 | 790 | 2150 | 2350 |
| E3 | 1240 | 950 | 2150 | 2350 |
| E3P | 1240 | 1090 | 2150 | 2350 |
| E4 | 1440 | 1090 | 2200 | 2350 |
| E5 | 1790 | 1090 | 2200 | 2350 |
| E6 | 2040 | 1090 | 2200 | 2350 |
| E7 | 2320 | 1090 | 2200 | 2350 |
| E8 | 2690 | 1090 | 2200 | 2350 |
| E9 | 3040 | 1090 | 2200 | 2350 |
| E10 | 3640 | 1090 | 2200 | 2350 |

H1 (*) = Packing height with optional A531 on/off damper

SHIPMENT: SHIPPING WEIGHT

STANDARD PACKING

| Model | 013 | 021 | 032 | 045 | 053 | 072 | 081 | 100 | 120 | 138 | 160 | |
|--------------|-----|-----|-------|-----|-----|-------|-----|-------|-----|-------|-------|------|
| Size | E1 | E2 | E3 | E3P | E4 | E5 | E6 | E7 | E8 | E9 | E10 | |
| Weight UNDER | kg | 250 | 295,2 | 379 | 397 | 460,5 | 570 | 645,5 | 724 | 815,5 | 940,5 | 1125 |
| Weight OVER | kg | 237 | 277,2 | 356 | 389 | 426,5 | 528 | 597,5 | 670 | 753,5 | 866,5 | -- |

OPTIONAL 9973: WOODEN CAGE PACKING


| Model | 013 | 021 | 032 | 045 | 053 | 072 | 081 | 100 | 120 | 138 | 160 | |
|------------------|-----|-----|-------|-----|-----|-------|-----|-------|-----|-------|--------|------|
| Size | E1 | E2 | E3 | E3P | E4 | E5 | E6 | E7 | E8 | E9 | E10 | |
| Weight UNDER | kg | 277 | 323,2 | 411 | 429 | 496,5 | 606 | 689,5 | 776 | 865,5 | 998,5 | 1183 |
| Weight UNDER (1) | kg | 299 | 348,2 | 444 | 468 | 540,5 | 661 | 752,5 | 848 | 948,5 | 1096,5 | 1306 |
| Weight OVER | kg | 264 | 305,2 | 388 | 421 | 462,5 | 564 | 641,5 | 722 | 803,5 | 924,5 | -- |
| Weight OVER (1) | kg | 286 | 330,2 | 421 | 460 | 506,5 | 619 | 704,5 | 794 | 886,5 | 1022,5 | -- |

(1) Machine with optional A531 on/off damper

SHIPMENT: OPTIONALS PACKING DIMENSIONS AND SHIPPING WEIGHT

- P011 - EMPTY PLENUM
- P012 - EMPTY PLENUM CL.A1
- P031 - EMPTY INTAKE PLENUM
- P032 - EMPTY INTAKE PLENUM CL.A1
- P013 - PLENUM + 3 GRILLES
- P014 - PLENUM + 3 GRILLES CL.A1
- P015 - SILENCED PLENUM
- P016 - SILENCED PLENUM + 1 GRILLE
- P017 - PLENUM + FILTER EPM2.5 50%
- P018 - PLENUM + FILTER EPM1 50%
- P019 - PLENUM + FILTER EPM1 85%

The plenums are shipped on pallet and covered with shrink wrap.

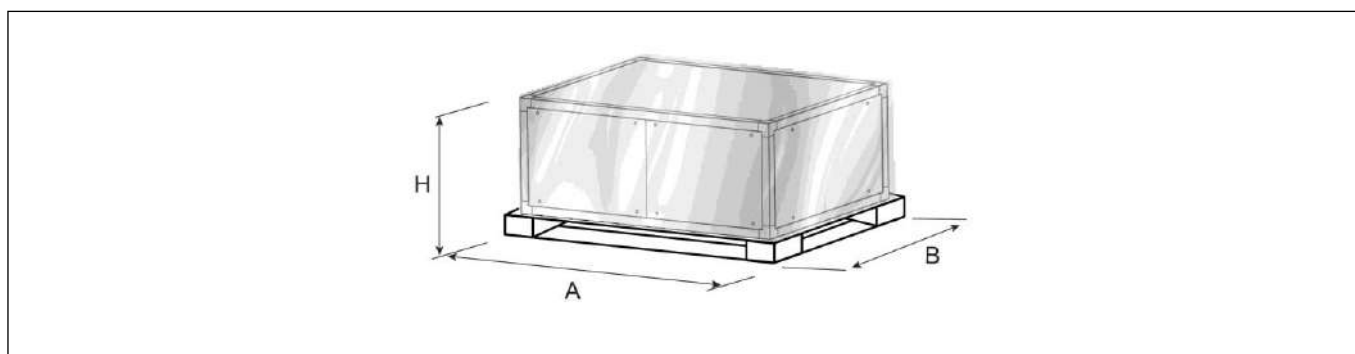


| Size | | E1 | E2 | E3 | E3P | E4 |
|--|----|-----|-----|------|------|------|
| DIMENSIONS | | | | | | |
| A | mm | 750 | 900 | 1200 | 1200 | 1400 |
| B | mm | 750 | 750 | 910 | 1050 | 1050 |
| H | mm | 630 | 630 | 630 | 630 | 630 |
| SHIPPING WEIGHT | | | | | | |
| P011 - Empty plenum "O" / "U" | kg | 31 | 34 | 41 | 44 | 53 |
| P012 - Empty plenum CL.A1 "O" / "U" | kg | 36 | 39 | 47 | 52 | 62 |
| P031 - Empty intake plenum "O" / "U" | kg | 31 | 34 | 41 | 44 | 53 |
| P032 - Empty intake plenum CL.A1 "O" / "U" | kg | 36 | 39 | 47 | 52 | 62 |
| P013 - Plenum + 3 grilles "O" / "U" | kg | 32 | 35 | 47 | 56 | 68 |
| P014 - Plenum + 3 grilles CL.A1 "O" / "U" | kg | 36 | 40 | 54 | 63 | 77 |
| P015 - Silenced plenum "O" / "U" | kg | 36 | 39 | 47 | 56 | 68 |
| P016 - Silenced plenum + 1 grille "O" / "U" | kg | 41 | 44 | 54 | 64 | 88 |
| P017 - P018 - P019 - Plenum + filter "O" / "U" | kg | 37 | 39 | 47 | 52 | 68 |

| Size | | E5 | E6 | E7 | E8 | E9 | E10 |
|--|----|------|------|------|------|------|------|
| DIMENSIONS | | | | | | | |
| A | mm | 1750 | 2000 | 2280 | 2650 | 3000 | 3600 |
| B | mm | 1050 | 1050 | 1050 | 1050 | 1050 | 1050 |
| H | mm | 630 | 630 | 630 | 630 | 630 | 630 |
| SHIPPING WEIGHT | | | | | | | |
| P011 - Empty plenum "O" / "U" | kg | 69 | 78 | 88 | 105 | 122 | 146 |
| P012 - Empty plenum CL.A1 "O" / "U" | kg | 79 | 89 | 100 | 119 | 137 | 167 |
| P031 - Empty intake plenum "O" / "U" | kg | 69 | 78 | 88 | 105 | 122 | 146 |
| P032 - Empty intake plenum CL.A1 "O" / "U" | kg | 79 | 89 | 100 | 119 | 137 | 167 |
| P013 - Plenum + 3 grilles "O" / "U" | kg | 79 | 96 | 106 | 135 | 152 | 192 |
| P014 - Plenum + 3 grilles CL.A1 "O" / "U" | kg | 90 | 107 | 122 | 151 | 170 | 212 |
| P015 - Silenced plenum "O" / "U" | kg | 81 | 98 | 113 | 130 | 152 | 182 |
| P016 - Silenced plenum + 1 grille "O" / "U" | kg | 101 | 111 | 126 | 155 | 182 | 212 |
| P017 - P018 - P019 - Plenum + filter "O" / "U" | kg | 84 | 98 | 118 | 135 | 152 | 182 |

"O" Over / "U" Under

P034: INTAKE FREE-COOLING PLENUM

The plenums are shipped on pallet and covered with shrink wrap.

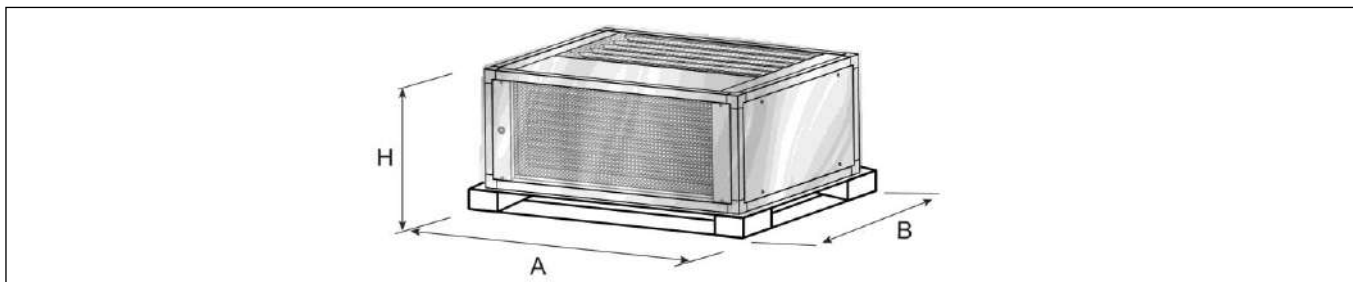


| Size | | E1 | E2 | E3 | E3P | E4 | E5 | E6 | E7 | E8 | E9 | E10 |
|---------------------------------------|----|-----|-----|------|------|------|------|------|------|------|------|------|
| DIMENSIONS | | | | | | | | | | | | |
| A | mm | 750 | 900 | 1200 | 1200 | 1400 | 1750 | 2000 | 2280 | 2650 | 3000 | 3600 |
| B | mm | 750 | 750 | 910 | 1050 | 1050 | 1050 | 1050 | 1050 | 1050 | 1050 | 1050 |
| H | mm | 630 | 630 | 630 | 630 | 750 | 750 | 750 | 750 | 750 | 750 | 750 |
| SHIPPING WEIGHT | | | | | | | | | | | | |
| P034 - Intake free-cooling plenum "U" | kg | 35 | 39 | 52 | 62 | 76 | 90 | 111 | 128 | 155 | 182 | 217 |
| P034 - Intake free-cooling plenum "O" | kg | 35 | 39 | 52 | 62 | 76 | 90 | 111 | 128 | 155 | 182 | 217 |

"O" Over / "U" Under

P041 / P042 / P043: SUPPORT FRAME


The support frames are shipped on pallet and covered with shrink wrap.

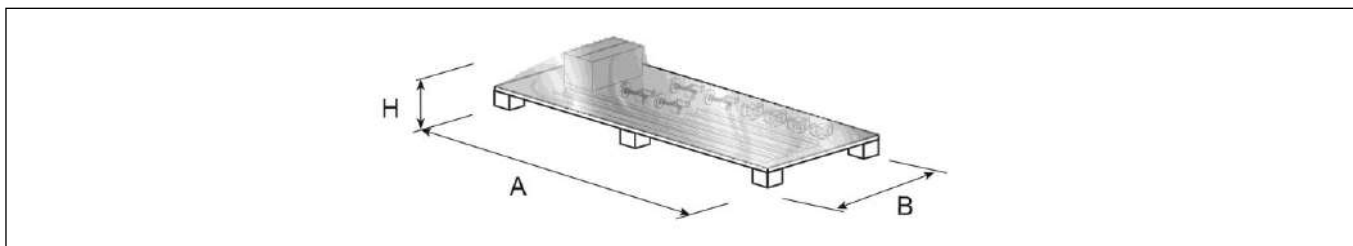

| Size | | E1 | E2 | E3 | E3P | E4 | E5 | E6 | E7 | E8 | E9 | E10 |
|------------------------|----|------|------|------|------|------|------|------|------|------|------|------|
| DIMENSIONS | | | | | | | | | | | | |
| A | mm | 1200 | 1200 | 1200 | 1200 | 1400 | 1750 | 2000 | 2280 | 2650 | 3000 | 3600 |
| B | mm | 900 | 900 | 900 | 900 | 900 | 900 | 900 | 900 | 900 | 900 | 900 |
| H | mm | 500 | 500 | 500 | 500 | 500 | 500 | 500 | 500 | 500 | 500 | 500 |
| SHIPPING WEIGHT | | | | | | | | | | | | |
| | kg | 26 | 27 | 29 | 30 | 37 | 40 | 44 | 47 | 49 | 53 | 58 |

P113 / P114: DUAL POWER SUPPLY KIT / DUAL POWER SUPPLY KIT+OPTIONAL

The optionals are shipped in a cardboard box.

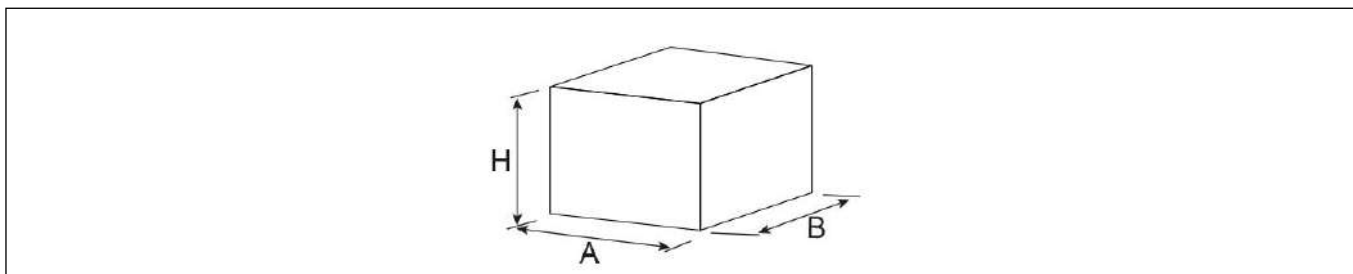

P113 / P114: DUAL POWER SUPPLY KIT / DUAL POWER SUPPLY KIT+OPTIONAL

| Size | | E1 | E2 | E3 | E3P | E4 | E5 | E6 | E7 | E8 | E9 | E10 |
|------------------------|----|-----|-----|-----|-----|-----|----|----|----|----|----|-----|
| DIMENSIONS | | | | | | | | | | | | |
| A | mm | 400 | 400 | 400 | 400 | 400 | -- | -- | -- | -- | -- | -- |
| B | mm | 400 | 400 | 400 | 400 | 400 | -- | -- | -- | -- | -- | -- |
| H | mm | 210 | 210 | 210 | 210 | 210 | -- | -- | -- | -- | -- | -- |
| SHIPPING WEIGHT | | | | | | | | | | | | |
| | kg | 12 | 12 | 12 | 12 | 12 | -- | -- | -- | -- | -- | -- |



for a greener tomorrow

Eco Changes is the Mitsubishi Electric Group's environmental statement, and expresses the Group's stance on environmental management. Through a wide range of businesses, we are helping contribute to the realization of a sustainable society.



MITSUBISHI ELECTRIC HYDRONICS & IT COOLING SYSTEMS S.p.A.

Via Caduti di Cefalonia, 1 - 36061 Bassano del Grappa (VI) Italy
Ph. (+39) 0424 509 500 • Fax (+39) 0424 509 509
www.melcohit.com

